


The **SM2527-41** is a 2.5 to 2.7 GHz solid state GaAs FET amplifier designed for the Multichannel Multipoint Distribution System (MMDS) market. By using the latest surface mount technologies, this small amplifier can easily fit into tightly packed transmitters and repeaters. The output power (P1dB) is +41 dBm, the OIP3 is +52 dBm, and the linear gain is 55 dB. The unit is available in modular form (standard), or as a rack mountable amplifier.

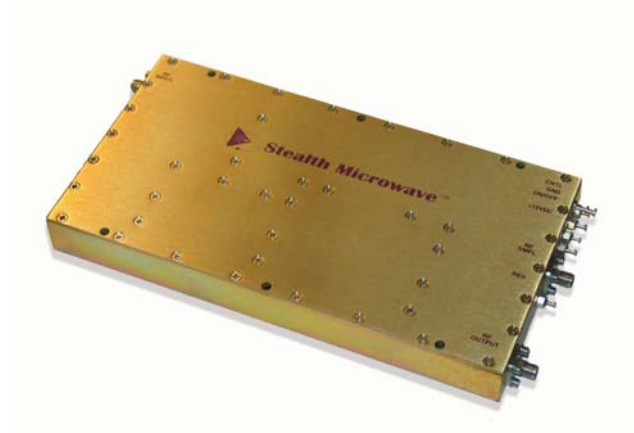

Features

- Single Power Supply
- Over/Reverse Voltage Protection
- Thermal Protection with Auto Reset
- Temperature Compensation
- Integral Output Isolator

Options

- Forward/Reverse Power Detection
- RF Sampling
- Logic On/Off Control
- Integral Heatsink

Configurations

- Module
- 19" Rack

Parameter	Specification
Frequency Range	2.5 - 2.7 GHz
Pout (P1dB)	+ 41 dBm
Third Order Intercept Point	+ 52 dBm
Linear Gain	55 dB \pm 1 dB
Gain Flatness over Full Band	\pm .5 dB
Gain Change over Temperature	\pm .5 dB
Input/Output Return Loss	-16 dB /-18 dB
DC Input Voltage	+ 12 Volts
DC Input Current, typ.	4.3 Amperes
Level Control (Optional)	20 dB (min.)
Mechanical Dimensions	7.5 x 4.0 x 2.0 in.
RF Connectors	SMA Female
Operating Temperature	0°C to +55°C
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

Pin	Description	Values
RF Input	Input Connector (SMA Female)	- 4 dBm, typical
RF OUT	Output Connector (SMA Female)	+ 41 dBm @ P1dB
RF SAMPLE (Optional)	Sample RF Port (SMA Female)	30 dB
GND	Ground Turret	---
REV	Reverse Power Detector	∞ VSWR @ + 41 dBm \approx + 5 Volts
FWD	Forward Power Detector	+ 41 dBm Output Power \approx + 5 Volts
+12VDC	DC Input Voltage	+ 12 Volts @ 4.6 Amperes (typ.)
On/Off	TTL Logic On/Off	0 Volts = Off, + 5 Volts = On

Specifications subject to change without notice.