

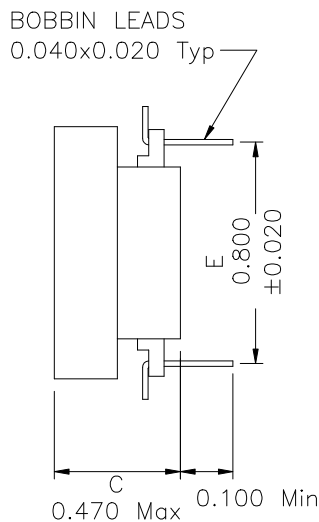


1. Dimensions:

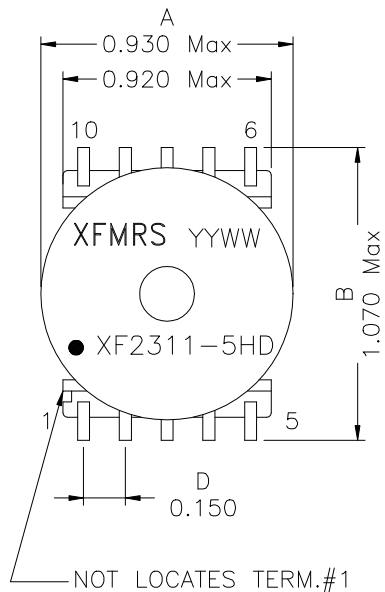

2.Schematic:

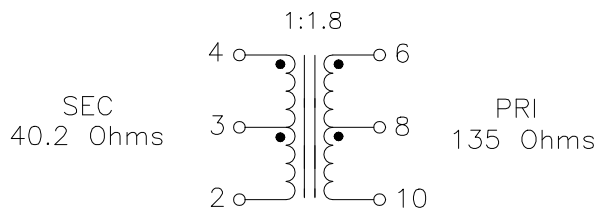

3.Electrical Specifications: @25°C

ISOLATION VOLTAGE: 2000Vrms PRI to SEC
 TURNS RATIO: PRI:SEC=1.8:1 ±1%
 PIN6-10 Inductance: 2.92mH ±5% @10KHz 1.0V
 PIN6-10 LL: 28uH Typ @100KHz 1.0V Short P4-2
 DCR: 1.5 ohms Max. (8-10)
 DCR: 2.3 ohms Max. (4-2)
 DCR: 1.5 ohms Max. (6-8)
 Longitudinal Balance: 50dB Min 40K-300KHz
 THD: -80dB Typ., 5KHz, 5Vp-p

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV D/1

XFMRS Inc	Title: HDSL TRANSFORMER	
	P/N: XF2311-5HD	REV. D
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN.	廖玉坤 Jun-11-01
	CHK.	李清儿 Jun-11-01
	APP.	Joe Huff Jun-11-01
SHEET 1 OF 1		