

Precision

# Digital Step Attenuator

## ZFAT-51020

50Ω TTL Control, Pin Diode 10 to 1000 MHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
Input Power	15 dBm
DC Voltage	5.5 V
TTL	5.5V

### Features

- wideband, 10 to 1000 MHz
- excellent step accuracy, 0.2 dB typ.
- small, shielded metal case

### Applications

- base stations
- cellular
- test sets



CASE STYLE: SSS173

Connectors	Model	Price	Qty.
SMA	ZFAT-51020	\$89.95	(1-9)
BRACKET (OPTION "B")		\$2.50	(1+)

### Digital Step Attenuator Electrical Specifications


MODEL NO.	FREQUENCY (MHz)		PRIMARY ATTENUATION STEPS (dB)			ATTENUATION (dB)		VSWR (:1)		
	$f_L$	$f_U$	#1	#2	#3	(1,1,1)** Nom.	(0,0,0) Max.	L	M	U
ZFAT-51020	10	1000	5±0.4	10±0.4	20±0.5	35.0	4.0	1.6	1.4	1.5

L=10 to 100 MHz      M=100 to 500 MHz      U=500 to 1000 MHz

\*\* Total attenuation above thru-loss.

1. Step accuracy is specified for basic steps. For combination of steps accuracy is additive.
2. Thru-loss is minimum insertion loss with all attenuation elements bypassed (All TTL controls state are Low)

### Outline Drawing

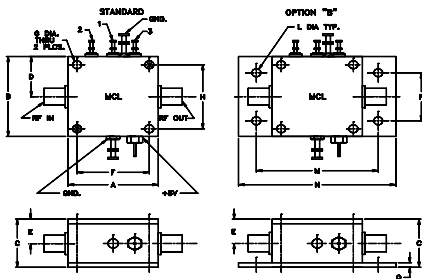

### Outline Dimensions (inch/mm)




A	B	C	D	E	F	G
1.25	1.25	.75	.63	.38	1.000	.125
31.75	31.75	19.05	16.00	9.65	25.40	3.18

H	L	M	N	P	Q	wt.
1.000	.125	1.688	2.18	.75	.07	grams
25.40	3.18	42.88	55.38	19.05	1.78	75

### Additional Specifications

DC Voltage	+5V
DC Current	12mA max.
Switching Time (50% TTL to within specified accuracy of the next-selected attenuation step, and to within 0.1 dB of steady-state Thru-Loss)	10μs typ., 15μs max.,
TTL Input High Threshold	2V min
TTL Input Low Threshold	0.8V max.
TTL Toggle Rate	50 kHz typ.
1dB Compression	0 dBm (10-100 MHz) +10 dBm (100-1000MHz)

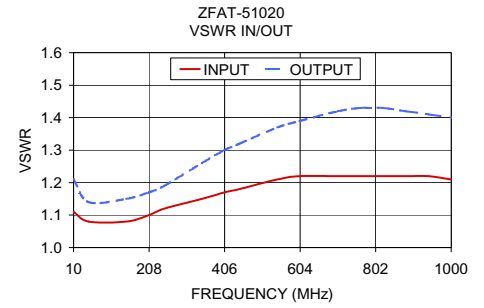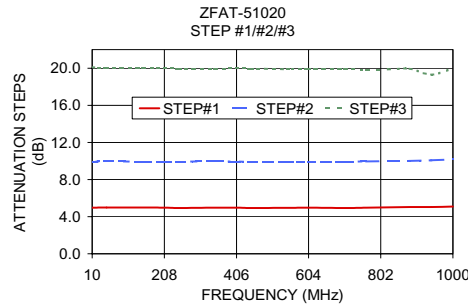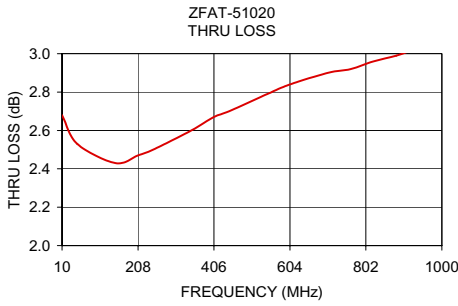

### Step Attenuation at TTL Control State

FREQ. (MHz)	000	001	010	011	100	101	110	111
10.00	2.68	4.96	9.93	14.90	20.10	24.96	29.77	34.53
49.60	2.53	4.98	9.95	14.90	20.05	24.95	29.92	34.69
148.60	2.43	4.98	9.94	14.93	20.04	25.05	29.90	34.88
208.00	2.47	4.96	9.93	14.89	20.00	24.91	29.92	34.86
247.60	2.50	4.94	9.94	14.88	19.95	24.83	29.91	34.76
346.60	2.60	4.96	9.96	14.87	19.96	24.96	29.92	34.42
406.00	2.67	4.96	9.94	14.82	19.97	24.91	29.80	34.60
445.60	2.70	4.94	9.92	14.80	19.96	24.96	29.84	34.47
544.60	2.79	4.95	9.91	14.81	19.88	24.85	29.76	34.43
604.00	2.84	4.97	9.94	14.84	19.88	24.90	29.83	34.54
703.00	2.90	4.94	9.94	14.82	19.88	24.90	29.72	34.86
762.40	2.92	4.96	9.96	14.81	19.83	24.85	29.80	35.22
821.80	2.96	5.01	9.98	14.88	19.87	24.92	29.99	35.21
881.20	2.99	5.03	10.01	14.96	19.94	24.92	30.10	35.13
940.60	3.03	5.04	10.07	14.98	19.30	24.98	30.03	35.08
1000.00	3.06	5.09	10.16	15.08	20.00	25.28	29.95	35.55

### INPUT VSWR

FREQ. (MHz)	001	010	011	100	101	110	111
10.00	1.11	1.15	1.09	1.20	1.10	1.14	1.09
49.60	1.08	1.10	1.06	1.13	1.07	1.10	1.06
148.60	1.08	1.10	1.06	1.12	1.07	1.10	1.06
208.00	1.10	1.12	1.08	1.15	1.09	1.12	1.08
247.60	1.12	1.14	1.09	1.17	1.10	1.13	1.09
346.60	1.15	1.18	1.12	1.21	1.13	1.18	1.12
406.00	1.17	1.21	1.14	1.24	1.16	1.20	1.14
445.60	1.18	1.22	1.16	1.26	1.17	1.22	1.16
544.60	1.21	1.26	1.19	1.30	1.20	1.25	1.19
604.00	1.22	1.28	1.21	1.32	1.22	1.27	1.21
703.00	1.22	1.30	1.23	1.35	1.24	1.30	1.21
762.40	1.22	1.31	1.25	1.36	1.25	1.31	1.25
821.80	1.22	1.32	1.26	1.36	1.26	1.32	1.27
881.20	1.22	1.32	1.27	1.37	1.27	1.33	1.28
940.60	1.22	1.32	1.28	1.36	1.27	1.33	1.29
1000.00	1.21	1.32	1.29	1.36	1.28	1.33	1.30

### OUTPUT VSWR

FREQ. (MHz)	001	010	011	100	101	110	111
10.00	1.21	1.15	1.15	1.07	1.08	1.08	1.08
49.60	1.14	1.11	1.10	1.05	1.05	1.05	1.05
148.60	1.15	1.10	1.10	1.05	1.05	1.05	1.05
208.00	1.17	1.13	1.12	1.06	1.06	1.06	1.16
247.60	1.19	1.14	1.14	1.07	1.07	1.06	1.07
346.60	1.26	1.19	1.19	1.10	1.10	1.10	1.09
406.00	1.30	1.22	1.22	1.12	1.11	1.12	1.11
445.60	1.32	1.24	1.24	1.13	1.13	1.13	1.12
544.60	1.37	1.28	1.28	1.15	1.15	1.15	1.15
604.00	1.39	1.30	1.30	1.16	1.16	1.16	1.17
703.00	1.42	1.35	1.34	1.20	1.20	1.20	1.20
762.40	1.43	1.37	1.37	1.22	1.20	1.22	1.22
821.80	1.43	1.37	1.38	1.23	1.23	1.23	1.23
881.20	1.42	1.38	1.39	1.24	1.25	1.25	1.25
940.60	1.41	1.39	1.41	1.26	1.27	1.27	1.27
1000.00	1.40	1.40	1.42	1.27	1.27	1.28	1.28

\* Step attenuation above thru-loss (TTL logic 000)