


Top View

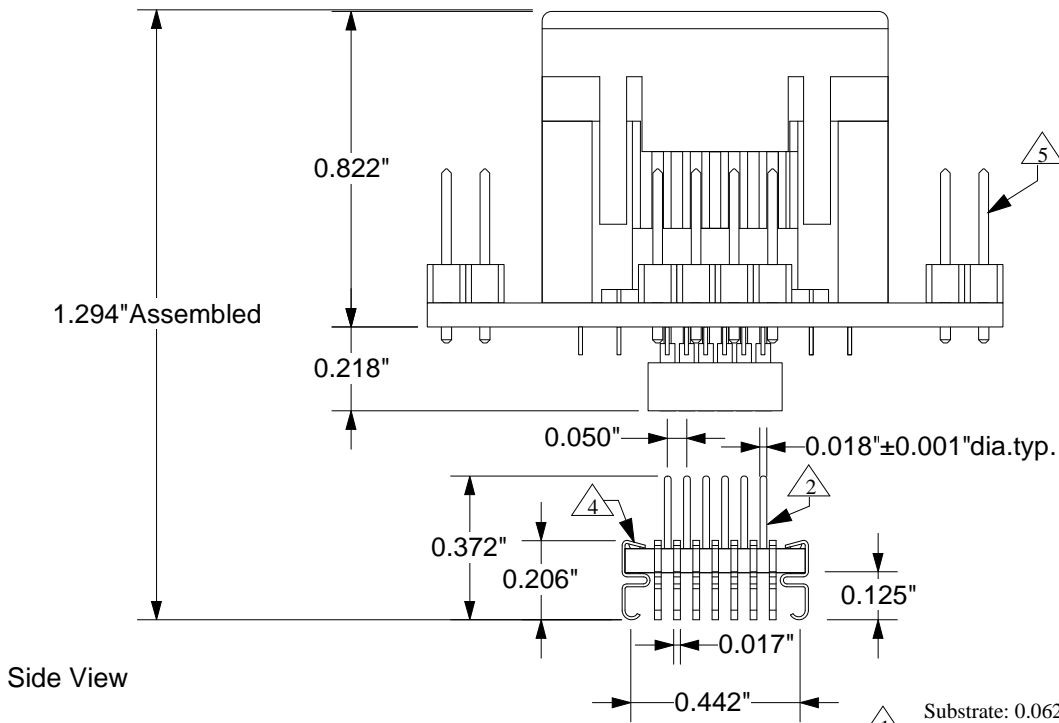


Side View

- 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- 4 Leads: material- BeCu Alloy 194; plating- 80/20 SnPb.
- 5 Test points: material- Phosphor Bronze; plating- Sn over 50µ" Ni. Gold flash on contact end.

Description: Carrier adaptor;  
2 piece pluggable adaptor, PLCC ZIF socket with test probes to surface mountable PLCC emulator foot.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>CA-PLCC028-Z-J-T-01 DRAWING</b>		Status: Released	Scale: 2:1	Rev: D
	© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100		Drawing: M. Lund	
			File: PCA-PLCC028-Z-J-T-01 DWG	Date: 8/17/94 Modified: 7/31/98