

# AZ21001

## 40 AMP MINIATURE POWER RELAY

### FEATURES

- Quick-connect leads for contacts
- 1 Form A, B and C contacts available
- AC and DC coils available
- Class F high temperature available
- Epoxy sealed versions available
- UL, CUR file E44211
- TÜV Pending



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A, or B) SPDT (1 Form C)
<b>Ratings</b>	Resistive load: Max. switched power: 1100 W or 7200 VA Max. switched current: 40 A (Form A)
<b>UL, CUR</b>	Max. switched voltage: 300 VAC, 110 VDC NO: 40A at 240 VAC 30A General Purpose 2HP at 250 VAC, 277 VAC
<b>TÜV</b>	NC: 30A at 240 VAC, 30A at 30 VDC 20A General Purpose 11/2 HP at 250 VAC, 277 VAC NO: 40A at 240 VAC, 14 VDC NC: 30A at 240 VAC, 14 VDC
<b>Material</b>	Silver cadmium oxide [1], silver tin oxide [2]
<b>Resistance</b>	< 50 milliohms initially (24 V, 1 A voltage drop method)

### COIL

<b>Power At Pickup Voltage (typical)</b>	DC: 500 mW AC: 1.4 VA
<b>Max. Continuous Dissipation</b>	DC: 1.7 W at 20°C AC: 2.7 VA at 20°C
<b>Max. Temperature</b>	Max. 130°C (266°F) Class B Max. 155°C (311°F) Class F

### GENERAL DATA

<b>Life Expectancy</b> Mechanical Electrical	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 30 A 120 VAC Res. N.O.
<b>Operate Time</b>	15 msec max. at nominal coil voltage
<b>Release Time</b>	10 msec max. at nominal coil voltage (without suppression)
<b>Dielectric Strength</b> (at sea level for 1 min.)	1500 Vrms contact to contact 2500 Vrms contact to coil
<b>Insulation Resistance</b>	1000 megohms min. at 20°C, 500 VDC 50% RH
<b>Dropout</b>	DC: > 10% of nominal coil voltage AC: > 30% of nominal coil voltage
<b>Ambient Temperature Operating Storage</b>	-55°C (-67°F) to 100°C (212°F) Class B -55°C (-67°F) to 130°C (266°F) Class B -55°C (-67°F) to 125°C (257°F) Class F -55°C (-67°F) to 155°C (311°F) Class F
<b>Vibration</b>	0.062" DA at 10–55 Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C., Quick Connects Note: Allow suitable slack on leads when wiring, and do not subject the terminals to excessive force.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	30 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

3/10/09


# AZ21001

## RELAY ORDERING DATA

COIL SPECIFICATIONS – DC Coil					ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal Current mA ± 10%	Coil Resistance ± 10%	
3	2.25	3.9	300	10	AZ21001-1A-3D
5	3.75	6.5	179	28	AZ21001-1A-5D
6	4.50	7.8	150	40	AZ21001-1A-6D
9	6.75	11.7	100	90	AZ21001-1A-9D
12	9.00	15.6	75	160	AZ21001-1A-12D
15	10.25	19.5	60	250	AZ21001-1A-15D
18	13.5	23.4	50	360	AZ21001-1A-18D
24	18.0	31.2	38	640	AZ21001-1A-24D
48	36.0	62.4	19	2,560	AZ21001-1A-48D
110	82.50	143	8	13,445	AZ21001-1A-110D
COIL SPECIFICATIONS – AC Coil 50/60 Hz					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Coil Power VA	Coil Resistance ± 10%	
12	9	15.6	2.0	27	AZ21001-1A-12A
24	18	31.2	2.0	120	AZ21001-1A-24A
120	90	156	2.0	3,040	AZ21001-1A-120A
220	165	286	2.0	13,490	AZ21001-1A-240A

\*Substitute "-1B" or "-1C" in place of "-1A" for 1 Form B or 1 Form C respectively. For silver tin oxide contacts substitute "-1AE" or "-1CE" in place of "-1A" or "-1C." To indicate class F version, add suffix "F". Substitute "DE" or "AE" in place of "D" or "A" for epoxy sealed version.

## MECHANICAL DATA

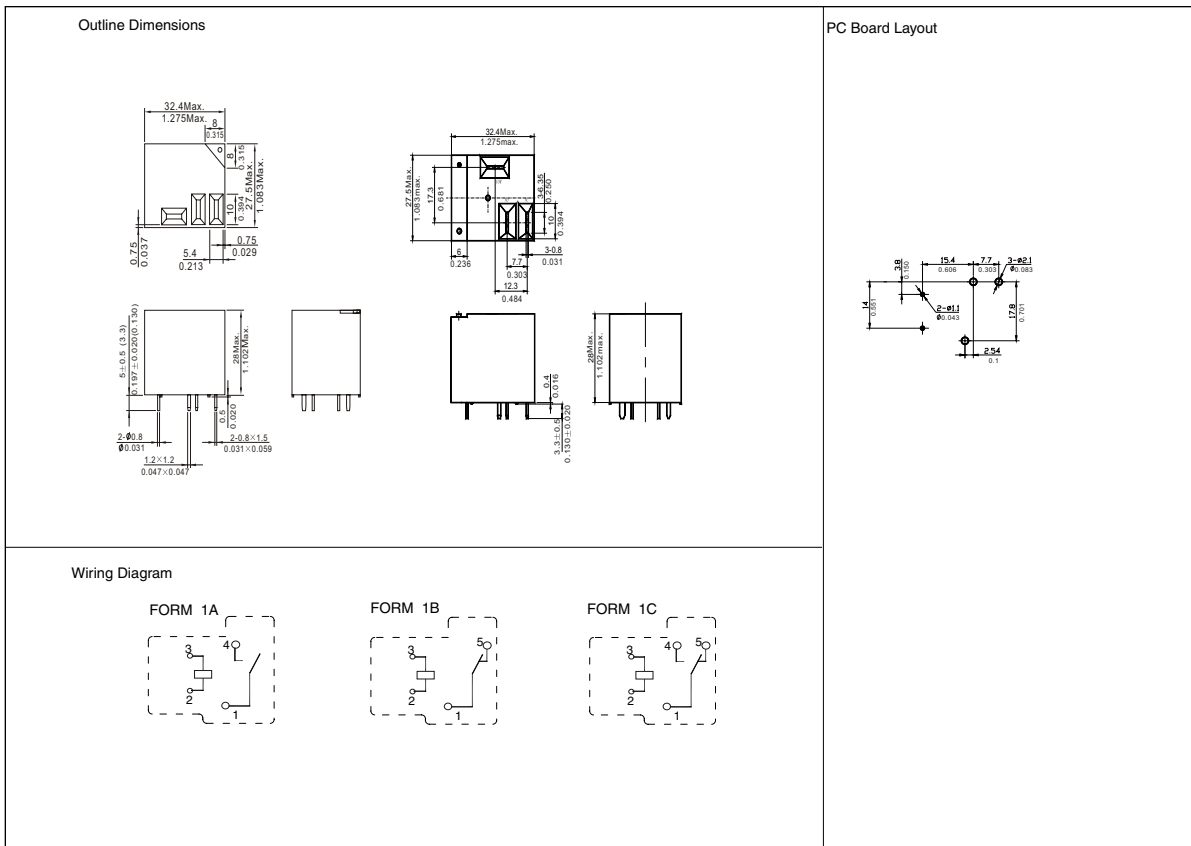

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM