

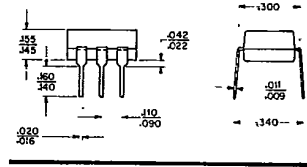


LED-

Photoconductor Dip Isolators

CLM50 CLM51

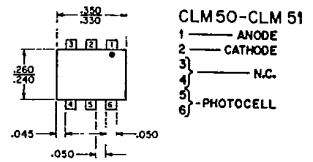

The CLM50 and CLM51 incorporate a GaP LED coupled with a photoconductive cell to provide a D.I.P. opto isolator for both linear and logic functions. Both units provide line voltage output capability of 250V PAC, isolation voltage of 2500V PAC and a minimum Off Resistance of 1 Meg. Controlled resistances are featured at 16mA and 1mA respectively. The units are ideally suited for thyristor control, logic and critical circuitry isolation, remote and supervisory control circuitry. These components are recognized under the Component Program of Underwriters' Laboratories Inc.

TECHNICAL DATA

LED	CHARACTERISTICS	TEST CONDITIONS	CLM50			CLM51			UNITS
			Min.	Typ.	Max.	Min.	Typ.	Max.	
I_F max.	Maximum forward current				40			40	mA
V_F	Forward voltage	$I_F = 16$ mA	2.0	2.5		2.0	2.5		volts
I_R	Reverse current	$V_R = 3$ V			10			10	μ A
PHOTOCELL V_{MAX}	Cell voltage		250			250			volts DC or PAC
P ①	Power dissipation	25° C			50			50	milliwatts
PHOTOMOD R_{ON} ②	On resistance	$I_F = 1$ mA $I_F = 16$ mA		5K 1.5K	2.5K		1.25K	4.5K	ohms
R_{OFF}	Off resistance	5 sec. after $I_F \rightarrow 0$ 4 VDC on cell	1 Meg.			1 Meg.			ohms
t_R ③	Rise time	Time to 63% of final condition at $I_F = 16$ mA		500		500			μ sec
t_D ④	Decay time	Time to 100K		60		60			milliseconds
V_{BD}	Isolation		2500			2500			volts DC or PAC
dRc/dt	Cell temperature coefficient	$I_F > 1$ mA		1		1			%/° C


Absolute Maximum Ratings:

Temperature Storage — 40° to 75° C


Operating — Derate power to 0 at 75° C

PC-LED PHOTOMOD SLOPE CHARACTERISTICS

RESPONSE TIME

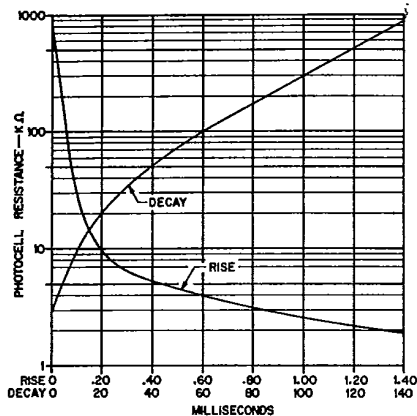

RESISTANCE vs. LED CURRENT

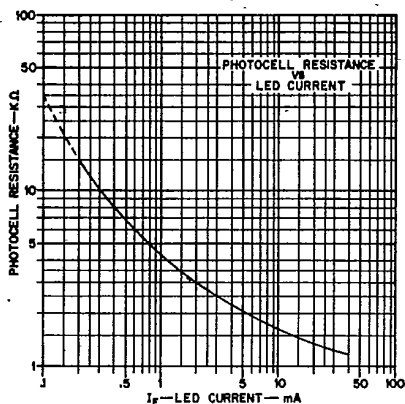

RESPONSE TIME

The t_{RISE} and t_{DECAY} curve is the response time of the module when the lamp current is instantaneously varied from either zero to rated lamp current (t_{RISE}) or rated lamp current to zero (t_{DECAY}).

These curves are representative characteristics. For specific specifications, please contact the factory.

Notes:

- ① P.D. at 25°C case temperature. Derate linearly to 0 at 75°C. Allowable PHOTOMOD dissipation is determined by the photocell temperature which must not exceed 75°C for continuous operation.
- ② After 24 hours on.
- ③ Rise time measured after 24 hours on + 5 seconds off.
- ④ Decay time measured from 24 hours on.