



9.6x9.6 Square/ Single Turn /Trimming Potentiometer



-- 3386P--

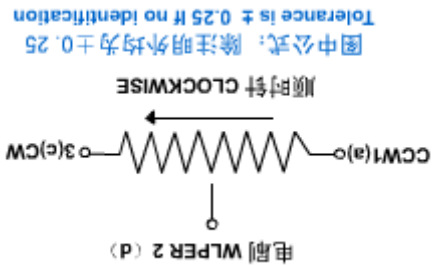

图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification



... Install dimension...

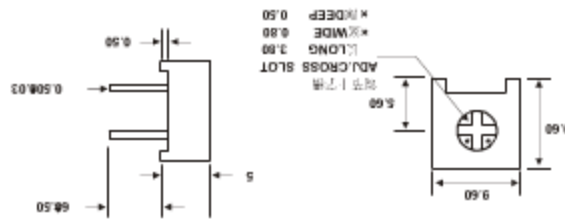


... Mutual dimension...

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Special resistances available
100	10	205
200	20	105
500	50	504
101	100	254
201	200	204
501	500	104
102	1,000	503
202	2,000	253
502	5,000	203
103	10,000	103
203	20,000	502
503	50,000	202
104	100,000	102
204	200,000	501
504	500,000	201
105	1,000,000	101
205	2,000,000	500
		200
		100

- Electrical Characteristics**
- Standard Resistance Range.....50Ω ~ 2MΩ
 - Resistance Tolerance.....±10%
 - Absolute Minimum Resistance.....≤1%R或
 - Contact Resistance Variation.....CRV ≤ 3%
 - Insulation Resistance.....R1 ≥ 1GΩ
 - Withstand Voltage.....600Vac
 - Effective Travel.....300°
- Environmental Characteristics**
- Power Rating, 315 volts max
 - 0.5W@70°C, 0W@125°C
 - Temperature Range.....-55°C ~ 125°C
 - Temperature Coefficient.....±250ppm/°C
 - Temperature Variation.....55°C, 30min, +125°C
 - 30min
 - 5cycles
 - ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 10%
 - Collision.....100m/s², 1000cycles, ΔR ≤ 2%R
 - Electrical Endurance at 70°C.....0.5W@70°C
 - 1000h, ΔR ≤ 10%R
 - Δ(Uab/Uac) ≤ 10%, CRV ≤ 3% or 5Ω
 - Rotational Life.....200cycles
 - ΔR ≤ 10%R, CRV ≤ 3% or 5Ω
- Physical Characteristics**

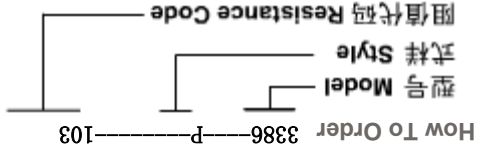

Special resistances available

3386P

