
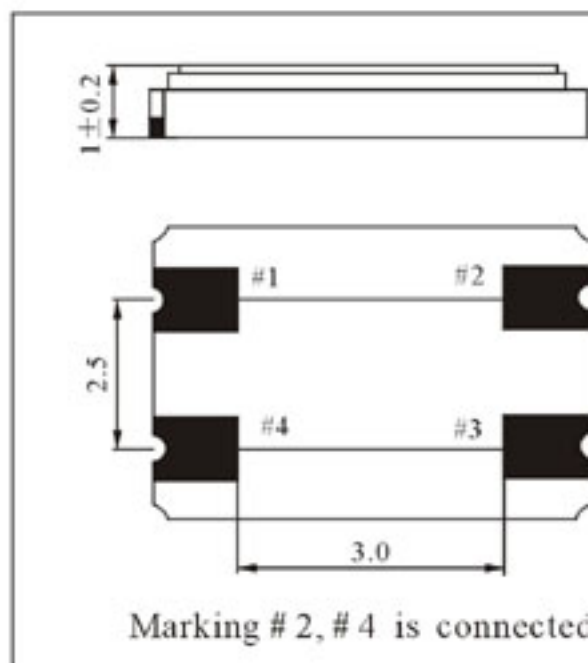


3.5±0.1

⊕ LAND PATTERN LAYOUT (EXAMPLE)

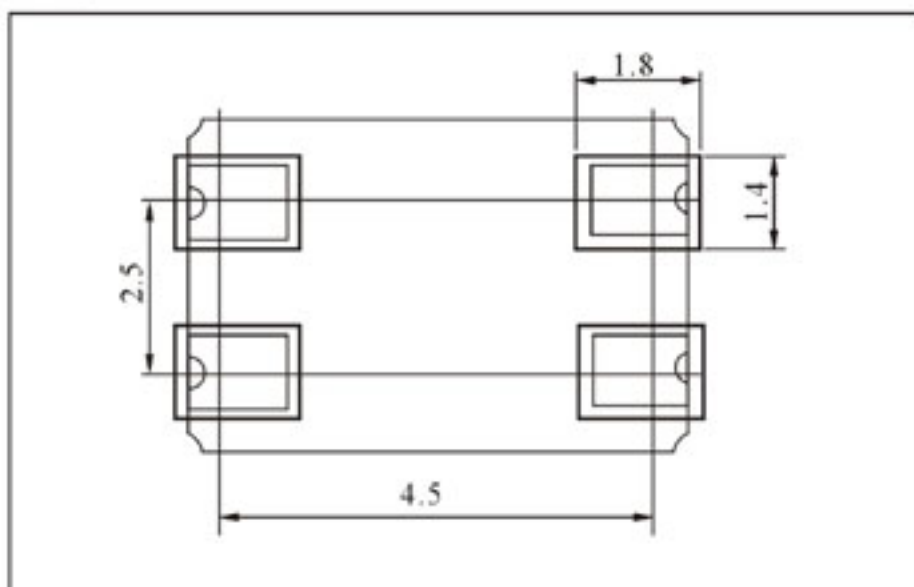

⊕ PART NUMBER GUIDE 部件号示例

e.g. FTX32.576M20SM6S (*SM6S=6.0X3.5 SMD S-S)

	Quartz Crystal Resonator 石英晶体谐振器	Frequency 频率	Load Capacitance 负载电容
FT	X	32.576MHz	20

⊕ PARAMETERS 技术参数

PARAMETERS	参数	SPECIFICATION 规格	
Frequency Range	频率范围	10MHz~40MHz	
Operation Mode	振动模式	Fundamental	
Load Capacitance	负载电容	Series 8pF, 10pF, 12pF	
Drive Level	激励电平	10uW(300uW Max)	
Frequency Tolerance	频率偏差	±10ppm ~ ±30 ppm Std.	
Motional Resistance	谐振电阻	80Ωmax(10~12MHz)50Ω max(12~40MHz)	
Frequency Stability	频率稳定性	±10, ±15, ±20(Unit:ppm)	
Operating Temp. Range	工作温度范围	-10°C ~ +60°C	
Storage Temp. Range	储存温度范围	-40°C ~ +85°C	

© All specifications subject change without notice. 规格变化, 恕不另行通知