
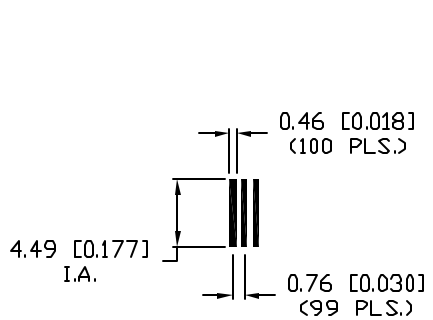


UNCONTROLLED DOCUMENT

PART NUMBER LCD-S1001M41TR		REV. A
REV. A	E.C.N. NUMBER AND REVISION COMMENTS E.C.N. #11148.	DATE 02.09.07

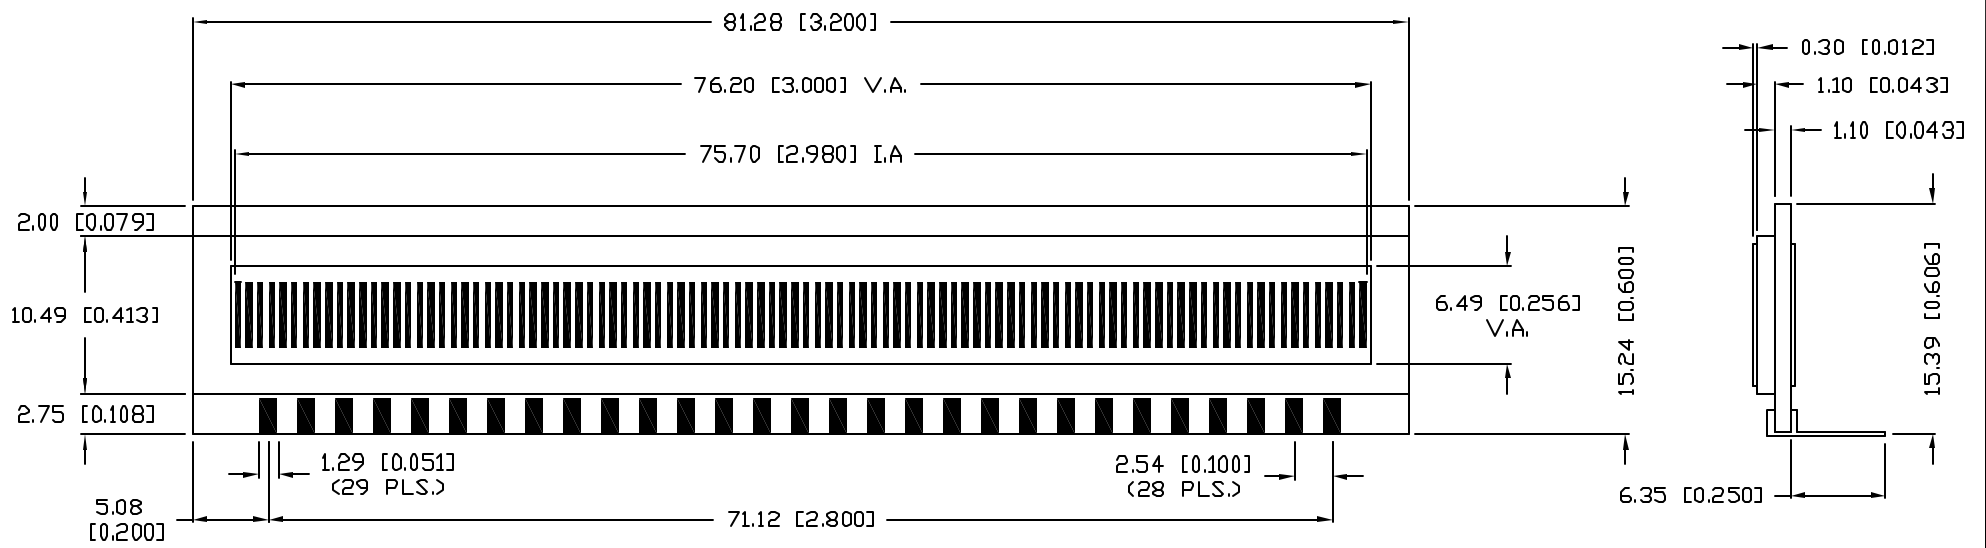

PIN NO.	COM1	COM2	COM3	COM4
1	1	2	3	4
2	8	7	6	5
3	9	10	11	12
4	16	15	14	13
5	17	18	19	20
6	24	23	22	21
7	25	26	27	28
8	32	31	30	29
9	33	34	35	36
10	40	39	38	37
11	41	42	43	44
12	48	47	46	45
13	49	50	51	52
14	56	55	54	53
15	57	58	59	60

PIN NO.	COM1	COM2	COM3	COM4
16	64	63	62	61
17	65	66	67	68
18	72	71	70	69
19	73	74	75	76
20	80	79	78	77
21	81	82	83	84
22	88	87	86	85
23	89	90	91	92
24	96	95	94	93
25	97	98	99	100
26	COM1			
27		COM2		
28			COM3	
29				COM4

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V AC
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/4 DUTY
CONNECTION TYPE	29 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+0.00}/_{-0.00} DECIMAL PRECISION, MAX.=^{+0.00}/_{-0.00} DECIMAL PRECISION.

(Pb) UNCONTROLLED DOCUMENT

REV. A	PART NUMBER LCD-S1001M41TR
100 SEGMENT CUSTOM LCD PANEL, TN, REFLECTIVE, 1/4 DUTY.	

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 1.10.00
			PAGE: 1 OF 1
			SCALE: N/A