Micro Mini Surface Mount Detect Switches



Features/Benefits

- New multi contact construction
- Metal actuator
- Low actuating force
- Gold contacts
- Compatible with pick and place machines
- RoHS compliant and compatible

Typical Applications

- Mobile phones and other handheld devices
- Portable medical devices
- Audio devices
- Automotive
- Alarm devices
- Payment terminals

Specifications

FUNCTION: Momentary action.

CONTACT TYPE: SPST Normally open.

TERMINALS: Gullwing type for SMT.

Mechanical

ACTUATING FORCE:

W version: 1,1 N \pm 0,8 N ST version: 0,7 N \pm 0,5 N

TRAVEL TO MAKE:

W version: 0,65 mm - 0,45/+0,25 mm ST version: 0,45 mm - 0,25/+0,1 mm MAXIMUM FORCE AT MAXIMUM TRAVEL: 1,8 N

OPERATING LIFE: 100,000 cycles

Packaging

Switches are delivered on continuous tape, in reels of 1,000 pieces

Electrical

MAXIMUM POWER: 0.2 VA MAXIMUM VOLTAGE: 32 VDC MINIMUM VOLTAGE: 20 mV MAXIMUM CURRENT: 0.01 A MINIMUM CURRENT: 0.01 mA CONTACT RESISTANCE: ≤ \leq 100 m Ω INSULATION RESISTANCE: (100 VDC) $10^9 \Omega$ DIELECTRIC STRENGTH: ≥ ≥ 250 Vrms **BOUNCE TIME:** ≤ 3 ms

Environmental

OPERATING TEMPERATURE: -40°C to +125°C STORAGE TEMPERATURE: -55°C to + 125°C


Process

SOLDERING: Compatible with lead free reflow process

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on page E-20. For additional options not shown in catalog, consult our Customer Service Center.

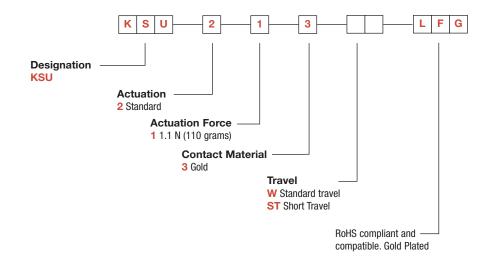



First Angle Projection


Dimensions are shown: mm Specifications and dimensions subject to change



www.ck-components.com

KSU Series Micro Mini Surface Mount Detect Switches


KSU






KSU213W **SPST**

W GULLWING








TAPE & REEL





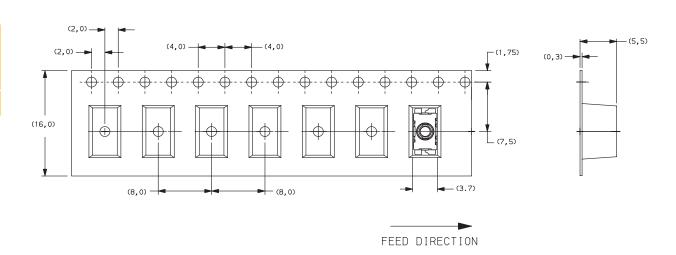



First Angle Projection

Dimensions are shown: mm Specifications and dimensions subject to change

