



L-TRON

10604 Warwick Ave.
Fairfax, Virginia 22030
703-591-7877

Presenting NEW LOW VOLTAGE POWER SUPPLIES

L-T



MODEL No.	OUTPUT		REGULATION		CASE SIZE	UNIT PRICE
	VDC	MA	LINE	LOAD		
SINGLE OUTPUTS						
LTP1.5.500	5	500	.1%	.1%	4A	\$46.00
LTP1.5.1000	5	1000	.1%	.1%	4B	71.00
LTP1.5.2000	5	2000	.1%	.1%	4C	97.00
LPP1.5.2000	5	2000	.1%	.1%	4C	120.00
LTP1.6.125	6	125	.1%	.1%	4A	33.00
LTP1.8.350	8	350	.1%	.1%	4A	55.00
LTP1.12.100	12	100	.1%	.1%	4A	35.00
LTP1.12.200	12	250	.1%	.1%	4A	53.00
LTP1.12.500	12	500	.1%	.1%	4C	77.00
LTP1.15.100	15	100	.1%	.1%	4A	32.00
LTP1.15.200	15	200	.1%	.1%	4C	46.00
LTP1.15.300	15	300	.1%	.1%	4C	63.00
LTP1.18.50	18	50	.1%	.1%	4A	42.00
LTP1.24.300	24	300	.1%	.1%	4C	82.00

DUAL OUTPUTS						
LTP2.5.25	±5	25	.1%	.1%	4B	\$31.00
LTP2.5.50	±5	50	.1%	.1%	4B	44.00
LTP2.5.100	±5	100	.1%	.1%	4B	59.00
LTP2.5.200	±5	200	.1%	.1%	4B	70.00
LTP2.5.300	±5	300	.1%	.1%	4B	77.00
LTP2.12.25	±12	25	.1%	.1%	4A	32.00
LTP2.12.50	±12	50	.1%	.1%	4A	44.00
LTP2.12.100	±12	100	.1%	.1%	4A	49.00
LTP2.12.200	±12	200	.1%	.1%	4A	66.00
LTP2.12.300	±12	300	.1%	.1%	4C	82.00
LTP2.15.25	±15	25	.1%	.1%	4A	33.00
LTP2.15.50	±15	50	.1%	.1%	4A	44.00
LTP2.15.100	±15	100	.1%	.1%	4A	49.00
LTP2.15.200	±15	200	.1%	.1%	4B	66.00
LTP2.15.350	±15	350	.1%	.1%	4C	99.00
LTP2.18.50	±18	50	.1%	.1%	4A	45.00
LTP2.24.200	±24	200	.1%	.1%	4C	108.00

TRIPLE OUTPUTS						
LTMP1.5.300	5/300/		.05%	.1%	5	108.00
2.12.150	+12 150		.05%	.1%		
LTMP1.5.300	5/300/		.05%	.1%	5	108.00
2.15.150	+15 150		.05%	.1%		
LTMP1.5.500	5/500/		.05%	.1%	5	98.00
2.12.100	+12 100		.05%	.1%		
LTMP1.5.500	5/500/		.05%	.1%	5	98.00
2.15.100	+15 100		.05%	.1%		

FEATURES:


LOW COST
ONE YEAR WARRANTY
SHORT CIRCUIT PROTECTED
NO DERATING THRU 71°C

OPTIONS:


1. Overvoltage Protection
2. 230Vac Input
3. Models with tighter regulation available upon request.

COMMON SPECIFICATIONS:

Voltage Output Set: ±2%
Input Voltage: 105-125Vac
Input Frequency: 50-400Hz
Ripple and Noise: Less than 1mVrms
Operating Temperature: -25°C to +71°C
Storage Temperature: -25°C to +85°C
Temperature Coefficient: 0.02%/°C typical
Input Isolation: 50 Meg Ohms

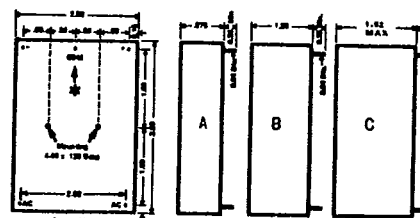CASE OUTLINES**CASE 4**

MATING SOCKET LT483-000-001
SOCKET PRICE \$7.00

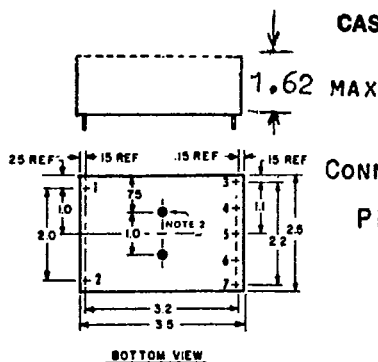CASE 5**CONNECTING INSTRUCTIONS**

PIN

- 1 ACIN
- 2 ACIN
- 3 COMMON
- 4 +5Vdc OUT
- 5 -15Vdc (-12Vdc) OUT
- 6 COMMON
- 7 +15Vdc (+12Vdc) OUT

NOTES

- 1 SEVEN PINS .040 DIA X .20 LG MIN
- 2 TWO MTG INSERTS .40 X .10 DP MIN
- 3 ALL DIMENSIONS ARE IN INCHES

MATING SOCKET LT483-000-005
SOCKET PRICE \$8.10

OTHER PRODUCTS INCLUDE RF FILTERS & ATTENUATORS

—PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE—