

Common Mode Filters(SMD) For High-speed Differential Signal Line

Conformity to RoHS Directive

TCM Series TCM1608G Type

FEATURES

- The TCM1608G (L1.6×W0.8×T0.4mm) is a dual-circuit modularized common mode filter array that is in the smallest class in the industry.
- By providing wide bandwidth (cutoff frequency: 3GHz) for differential mode, this product has almost no effect for high-speed differential signals and can suppress the radiated emission.
- This product contains no lead and supports lead-free soldering.

APPLICATIONS

- High speed interface(LVDS, IEEE1394 and USB2.0) in electronics devices.
- PDP/LCD/DLP/PJ TVs, DVD players, notebook PCs, DVC, DSC, amusement machines, portable audio, digital cellular phones, etc.

TEMPERATURE RANGE

| | |
|-----------|--------------|
| Operating | -25 to +85°C |
|-----------|--------------|

PACKAGING STYLE AND QUANTITIES


| | |
|-----------------|------------------|
| Packaging style | Quantity |
| Taping | 4000 pieces/reel |

PRODUCT IDENTIFICATION

| | | | | | |
|-----|------|-----|-------|------|-----|
| TCM | 1608 | G | - 201 | - 4P | - T |
| (1) | (2) | (3) | (4) | (5) | (6) |

- (1) Series name
- (2) Dimensions L×W
- (3) Product identification number
- (4) Impedance[at 100MHz]
201: 200Ω
- (5) Number of line
4P: 4-line
- (6) Packaging style
T: ø180mm reel taping

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS/RECOMMENDED PC BOARD PATTERNS

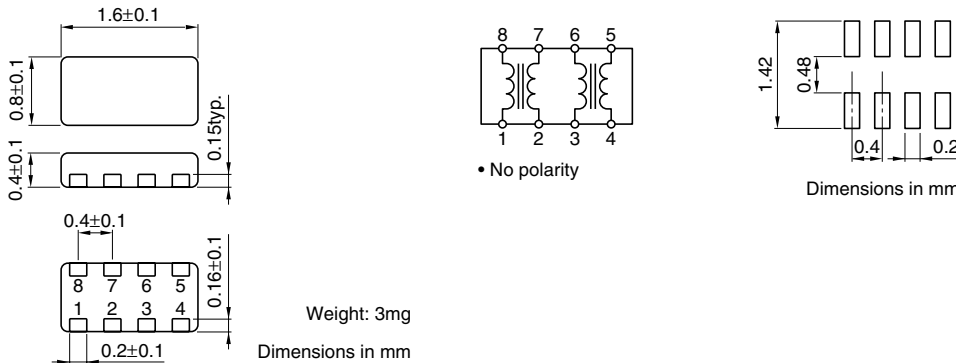


ELECTRICAL CHARACTERISTICS

| Part No. | Common mode impedance (Ω) [100MHz] | DC resistance (Ω)[1 line] | Rated current Idc(A)max. | Rated voltage Edc(V)max. | Insulation resistance (MΩ)min. |
|-----------------|------------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
| TCM1608G-350-4P | 35±30% | 0.85±30% | 0.10 | 5 | 10 |
| TCM1608G-650-4P | 65±20% | 1.30±30% | 0.10 | 5 | 10 |
| TCM1608G-900-4P | 90±20% | 1.50±30% | 0.10 | 5 | 10 |
| TCM1608G-201-4P | 200±20% | 4.00±30% | 0.05 | 5 | 10 |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS IMPEDANCE vs. FREQUENCY CHARACTERISTICS

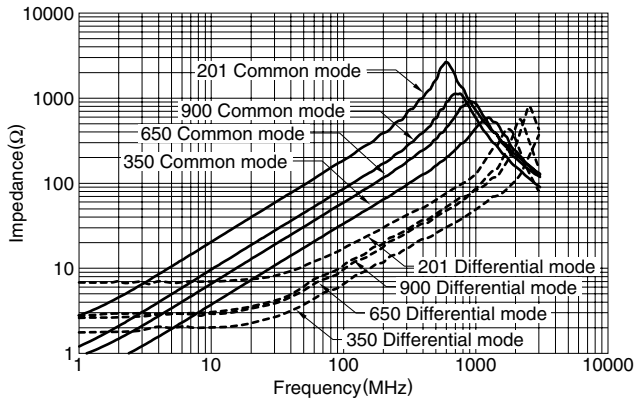

• All specifications are subject to change without notice.