


*Products for tomorrow...*

## Preliminary Datasheet

### DIMENSIONS (mm)

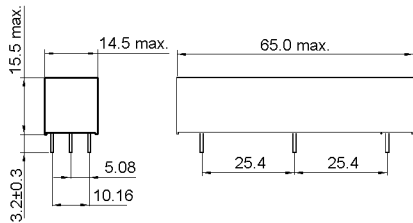


### PINS

Pins: Ø0.8 mm  
 L = 3.2 ± 0.3 mm  
 Material: Cu-alloy tinned



### LAYOUT

pitch 2.54 mm/Top view



### MARKING



### MARKING

MEDER-Label  
 Type/Layout  
 Production code,  
 EN60062/Factory code

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		45	50	55	Ohm
Coil voltage			5		VDC
Rated power			500		mW
Pull-In voltage				4	VDC
Drop-Out voltage		0.5			VDC

Contact data 83	Conditions	Min	Typ	Max	Unit
Contact-form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			50	W
Switching voltage	DC or Peak AC			7,500	V
Switching current	DC or Peak AC			3	A
Carry current	DC or Peak AC			5	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Contact resistance	Maximum value 1,5 ms after excitation Start Value			200	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			GOhm
Breakdown voltage	according to IEC 255-5	10			kV DC
Operate time incl. bounce	measured with 40% overdrive			3.2	ms
Release time	measured with no coil excitation			1.5	ms
Capacitance	@ 10 kHz across open switch		1		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Insulation resistance Coil/Contact	RH <45%, 200 VDC test voltage	10			TOhm
Isolation voltage Coil/Contact-shiel		1			kV DC
Housing material		Polycarbonat			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-35		105	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C

Modifications in the sense of technical progress are reserved

Designed at: 03/30/09 Designed by: WKOVACS  
 Last Change at: 05/21/10 Last Change by: MAPODACA

Approval at: 04/01/09 Approval by: KOLBRICH  
 Approval at: Approval by:

Rev. No.: 03