

# 200mW SOD-523 SURFACE MOUNT Very Small Outline Flat Lead Plastic Package Schottky Barrier Diode

**Absolute Maximum Ratings**  $T_A = 25$ °C unless otherwise noted

Symbol	Parameter	Value	Units	
P <sub>D</sub>	Power Dissipation	200	mW	
T <sub>STG</sub>	Storage Temperature Range	-55 to +125	°C	
TJ	Operating Junction Temperature	+125	°C	
V <sub>RM</sub>	Peal Reverse Voltage	40	V	
V <sub>R</sub>	Reverse Voltage	30	V	
I <sub>F</sub>	Forward Current	30	mA	
I <sub>FSM</sub>	Non-Repetitive Peak Forward Current	500	mA	

These ratings are limiting values above which the serviceability of the diode may be impaired.

# SOD-523 Flat Lead Sobject Symbol

## **Specification Features:**

- Low Forward Voltage Drop
- Flat Lead SOD-523 Small Outline Plastic Package
- Extremely Small SOD-523 Package
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

### **DEVICE MARKING CODES:**

	vice Marking
TCRB751S-40	4B


## **Electrical Characteristics** T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Test Condition	Limits		Unit
			Min	Max	Offic
Ву	Breakdown Voltage	I <sub>R</sub> =10μA	30		Volts
I <sub>R</sub>	Reverse Leakage Current	V <sub>R</sub> =30V		0.5	μA
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =1mA		0.37	Volts




# **Typical Performance Characteristics**

# **Total Capacitance**

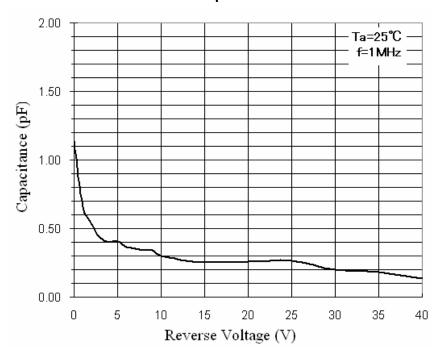


# Forward Voltage vs Ambient Temperature

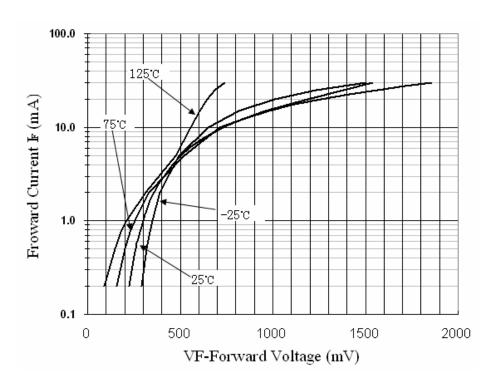




# Reverse Current vs Reverse VoltageReverse

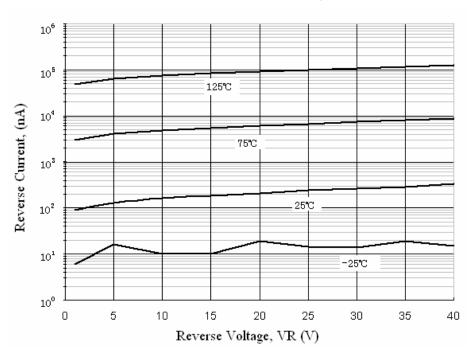



### Flat Lead SOD-523 Package Outline

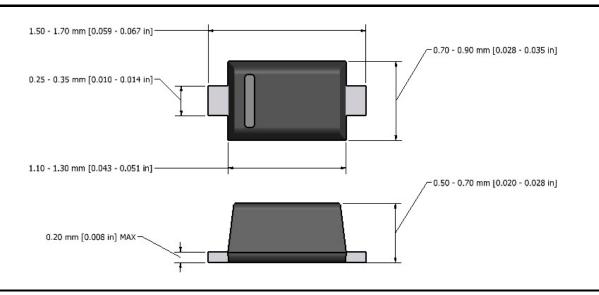

This datasheet presents technical data of Tak Cheong's Schottky Barrier Diodes. Complete specifications for the individual devices are provided in the form of datasheets. A comprehensive Selector Guide is included to simplify the task of choosing the best set of components required for a specific application. For additional information, please visit our website http://www.takcheong.com.

Although information in this datasheet has been carefully checked, no responsibility for the inaccuracies can be assumed by Tak Cheong. Please consult your nearest Tak Cheong's sales office for further assistance.

Tak Cheong reserves the right to make changes without further notice to any products herein to further improve reliability, function or design, cost and productivity.

TAK CHEONG ® and are registered trademarks of Tak Cheong Electronics (Holdings) Co., Ltd.