
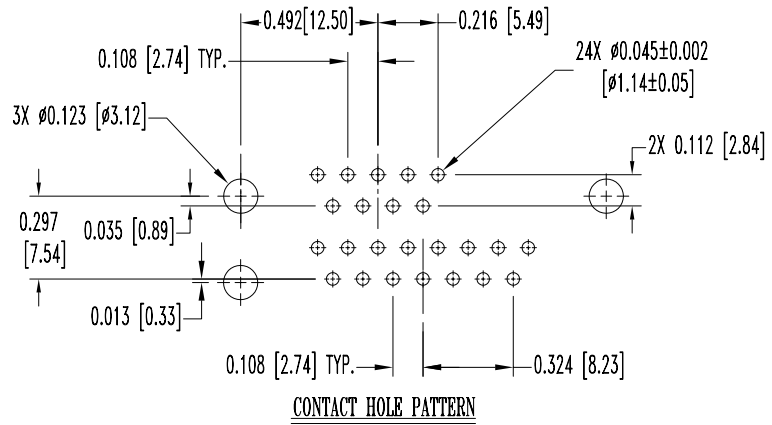
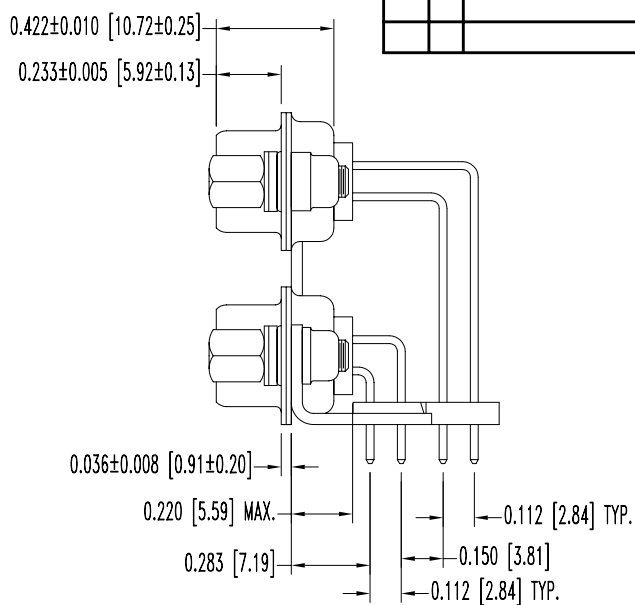


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-2-07	NC	ECO 27851		YK	

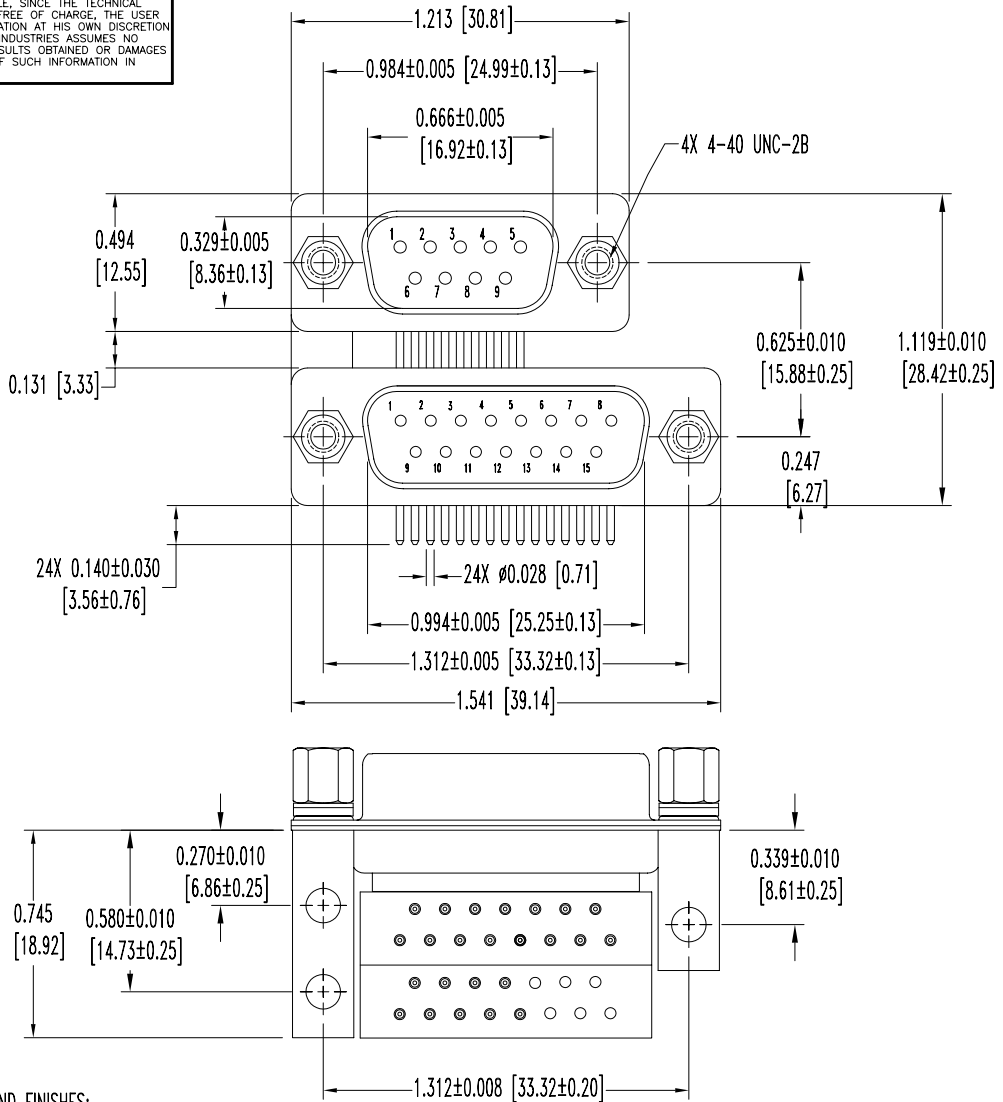

NOTES:

- MATERIALS AND FINISHES:**  
 INSULATORS: NYLON RESIN UL 94V-0, BLACK COLOR.  
 CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL FINISH.  
 SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
 MOUNTING BRACKETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.  
 JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
 ALIGNMENT BAR: GLASS FILLED NYLON, BLACK COLOR.  
 WASHERS: STAINLESS STEEL, PASSIVATED.
- ELECTRICAL CHARACTERISTICS:**  
 CONTACT CURRENT RATING: 5 AMPERES NOMINAL.  
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.  
 INSULATOR RESISTANCE: 5 G OHMS.
- TEMPERATURE RANGE:** -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].**

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. ± 0.015 [0.38]	DPA SERIES	SCALE N.T.S.
ANGULAR TOL. ± 5°	TITLE DPA9MR8T2/15MR8T20		
DATE 5-2-07	DRAWING NUMBER SK8542	REV. NC	APPROVED BY