



Features

- Very Low Noise 1.1 dB Typ.
- High +36 dBm Typ. IP3
- 16 dB Typical Gain
- 6.0 Volt Bias
- 26% High Power Added Efficiency


The MPS-0809A9-82 is a low noise, high dynamic range amplifier designed for ultralinear GSM, NMT-900 and ETACS receiver applications. The circuit is matched to 50 ohm and employs a single stage GaAs FET with internal matching to provide exceptional noise figure, 1.1 dB combined with extremely high IP3, +36 dBm. Typical applications are base station receivers, Tower mounted LNA's, smart antenna systems and receiver multi-couplers.

Specifications


- Electrical at 25°C, V_{dd}= 6.0 V, Z_o= 50 Ω

Symbol	Parameter	Min.	Typical	Max	Unit
Freq	Frequency Range	870		925	MHz
SSG	Small Signal Gain	14	16		dB
P1dB	P out at 1 dB Compression		+22.0		dBm
IP3	Third-order Intercept	+33	+36.0		dBm
NF	Noise Figure		1.1	1.5	dB
VSWR	Input VSWR		2.0:1	2.5:1	
ΔGOF	Gain Variation over Freq.		+/-0.2	+/-0.5	dB
ΔGOT	Gain Variation over Temp.		-.015		dB/°C
I _{dd}	DC Current		180	250	mA
PAE	Power Added Efficiency		26		%

Gain vs. Frequency

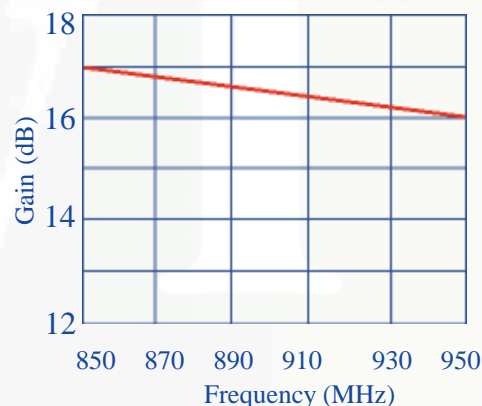

Noise Figure vs. Frequency

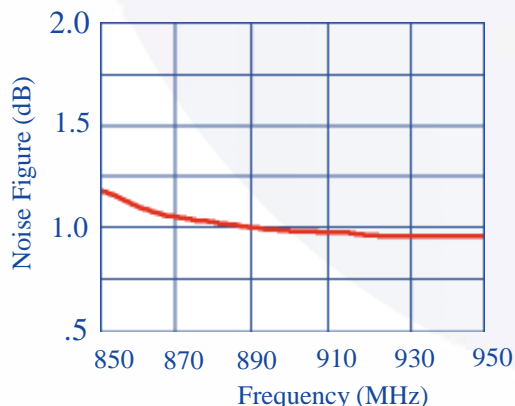

• Absolute Maximum Ratings

Maximum Bias Voltage	7.0 V
Maximum Continuous RF Input Power	240 mW
Maximum Peak Input Power	360 mW
Maximum Case Operating Temperature	+85°C
Maximum Storage Temperature	-65°C to +150°C

