

RS series, high-integration array resistor networks





This highly integrated network contains four or eight resistance elements in one chip.



RoHS compliant

SPECIFICATIONS

Mechanical

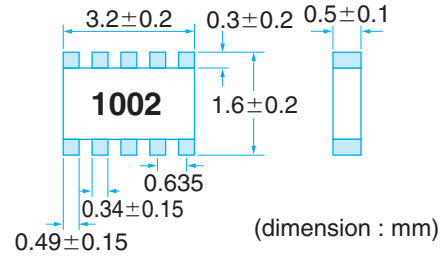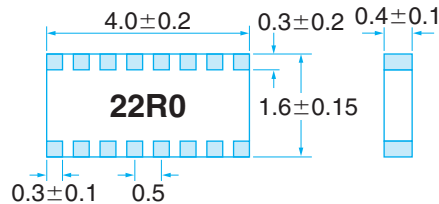

Equivalent circuit



Electrical

Type		RS8M	RS8A
Power	—	63mW/element	63mW/element
Resistance Range(Ω)	Jumper	10~47K	22~100K
Tolerance % (code)	—	±5.0 (J)	±5.0 (J)
TCR ppm /°C(code)	—	±250ppm	±250ppm
Max Operating Voltage	—	25V	50V
Resistance Value	—	E-24	E-24
Package		4,000pcs/reel	5,000pcs/reel

· Contact us for lead free glass coat products.

PART NUMBER

RS8M - 1002 - J 2

- Flat Electrode
- Resistance Tolerance
- Resistance
- Part Code