

## FEATURES AND SPECIFICATIONS

The Star Ring is a serrated ring that is mainly used for grounding. Unlike a ring terminal, when you tighten down on a star ring, the "star blades", or serrated edges, actually pierce through paint or other coatings, and bite into the metal to insure a good connection or ground! The product may also eliminate the need for lock washers.

## Star Ring Terminals




**UL** Steel Parts **UL** Brass Parts



Wire Range	Material: Brass or Steel			Krimptite®			Insulkrimp® (PVC Insulation)			Avikrimp® (Nylon Insulation)		
	Stud Size S	Max. Width W	Min. Clearance C	Order No.	Mylar Tape Order No.	Max. Length L	Order No.	Mylar Tape Order No.	Max. Length L	Order No.	Mylar Tape Order No.	Max. Length L
22-18 0.3-1.0mm <sup>2</sup> Brass	6	.385	.275	19074-0001	19074-0002	.70	19075-0001	19075-0002	.93	19077-0001	19077-0002	.93
	8	.385	.275	19074-0004	19074-0006	.70	19075-0003	19075-0004	.93	19077-0005	19077-0006	.93
	10	.385	.275	19074-0007	19074-0008	.70	19075-0005	19075-0006	.93	19077-0007	19077-0008	.93
22-18 0.3-1.0mm <sup>2</sup> Steel	6	.385	.275	19074-0009	19074-0010	.70	19075-0007	19075-0008	.93	19077-0009	19077-0010	.93
	8	.385	.275	19074-0011	19074-0012	.70	19075-0009	19075-0010	.93	19077-0011	19077-0012	.93
	10	.385	.275	19074-0013	19074-0014	.70	19075-0011	19075-0012	.93	19077-0013	19077-0014	.93
16-14 1.2-2.0mm <sup>2</sup> Brass	6	.385	.275	19074-0015	19074-0016	.70	19075-0013	19075-0014	.93	19077-0015	19077-0016	.93
	8	.385	.275	19074-0017	19074-0018	.70	19075-0015	19075-0016	.93	19077-0017	19077-0018	.93
	10	.385	.275	19074-0019	19074-0020	.70	19075-0017	19075-0018	.93	19077-0019	19077-0020	.93
16-14 1.2-2.0mm <sup>2</sup> Steel	6	.385	.275	19074-0021	19074-0022	.70	19075-0019	19075-0020	.93	19077-0021	19077-0022	.93
	8	.385	.275	19074-0023	19074-0024	.70	19075-0021	19075-0022	.93	19077-0023	19077-0024	.93
	10	.385	.275	19074-0025	19074-0026	.70	19075-0023	19075-0024	.93	19077-0025	19077-0026	.93

- One terminal mates with a range of stud sizes
- Consolidates inventory by reducing the number of part numbers required for purchase
- Available in loose piece and tape mounted format
- Material: Copper

## Multi-Stud Rings

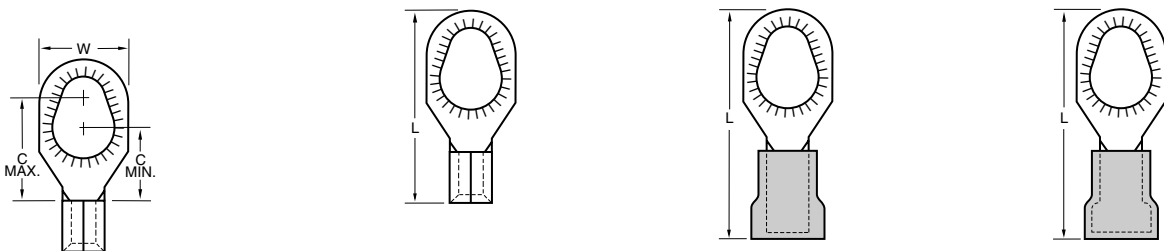

Wire Range	Stud Size S	Max. Width W	Min. Clearance C	Krimptite®			Insulkrimp® (PVC Insulation)			Avikrimp® (Nylon Insulation)		
				Order No.	Mylar Tape Order No.	Max. Length L	Order No.	Mylar Tape Order No.	Max. Length L	Order No.	Mylar Tape Order No.	Max. Length L
22-18 0.3-1.0mm <sup>2</sup>	6 - 8 - 10	.348	<u>.447</u> .330	19079-0004	19079-0005	.866	19080-0001	19080-0002	1.172	19081-0001	19081-0002	1.148
16-14 1.2-2.0mm <sup>2</sup>	6 - 8 - 10	.362	<u>.447</u> .330	19079-0007	19079-0009	.866	19080-0003	19080-0004	1.172	19081-0003	19081-0004	1.148
12-10 3.0-6.0mm <sup>2</sup>	6 - 8 - 10	.410	<u>.447</u> .330	19079-0011	19079-0012	.890	19080-0005	19080-0006	1.191	19081-0005	19081-0006	1.295