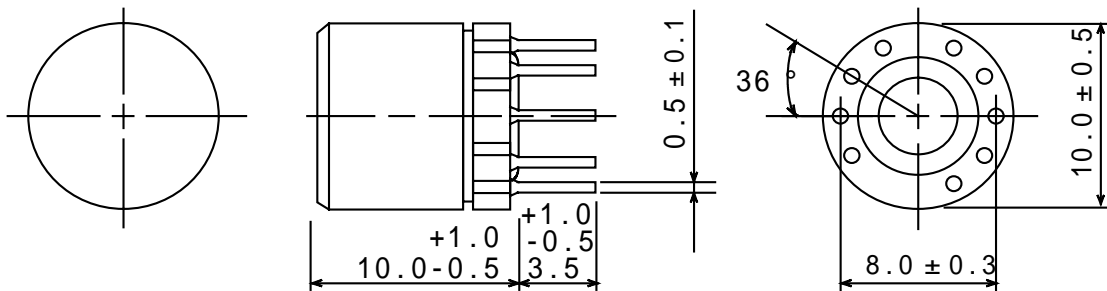


Type: MC-102
Product Description

- 10.5mm Max., 11.0mm Max. Height.
- Inductance: 80mH Max.
- Operating frequency: 400kHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.



Feature

- High inductance fixed shielded type.
- Can be used as DC-DC converter transformer.
- RoHS Compliance

Dimensions (mm)


* Dimension does not include solder used on coil.

* Pin pitch should be measured at the root of terminal.

Connection (Bottom View)


“ S ” is winding start.

Specification (Part No.: S711388)

Item	(7-9)	Measuring Condition
Inductance	980 μ H \pm 20% Within	1kHz
Unloaded Qu	60 Min.	74kHz