


### Features

- High Luminous LEDs
- 5mm Round Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

### Applications

- Traffic signal, Portable light source
- Signage and channel letter
- Decorating and entertainment lighting
- Architectural lighting
- Outdoor/Indoor applications/Other Lighting

### Outline Dimension

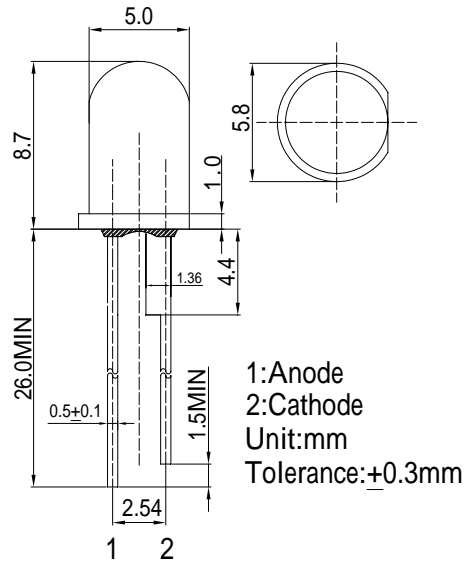


### Absolute Maximum Rating

( $T_a=25^\circ\text{C}$ )

| Item                       | Symbol    | Value           | Unit |
|----------------------------|-----------|-----------------|------|
| DC Forward Current         | $I_F$     | 50              | mA   |
| Pulse Forward Current*     | $I_{FP}$  | 120             | mA   |
| Reverse Voltage            | $V_R$     | 5               | V    |
| Power Dissipation          | $P_D$     | 130             | mW   |
| Operating Temperature      | $T_{opr}$ | $-30 \sim +85$  |      |
| Storage Temperature        | $T_{stg}$ | $-40 \sim +100$ |      |
| Lead Soldering Temperature | $T_{sol}$ | 260 / 5sec      | -    |

### Directivity

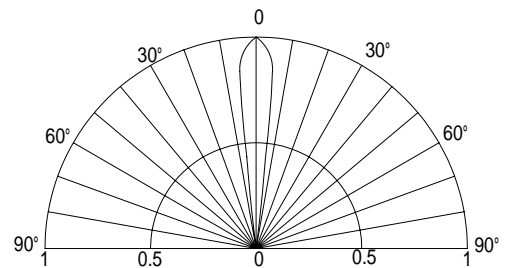

\*Pulse width Max.10ms Duty ratio max 1/10

### Electrical -Optical Characteristics

( $T_a=25^\circ\text{C}$ )

| Item                | Symbol          | Condition         | Min.  | Typ.   | Max. | Unit          |
|---------------------|-----------------|-------------------|-------|--------|------|---------------|
| DC Forward Voltage  | $V_F$           | $I_F=50\text{mA}$ | 2.0   | 2.2    | 2.6  | V             |
| DC Reverse Current  | $I_R$           | $V_R=5\text{V}$   | -     | -      | 10   | $\mu\text{A}$ |
| Domi. Wavelength*   | $\lambda_D$     | $I_F=50\text{mA}$ | 606   | 610    | 616  | nm            |
| Luminous Intensity* | $I_v$           | $I_F=50\text{mA}$ | 80000 | 100000 | -    | mcd           |
| 50% Power Angle     | $2\theta_{1/2}$ | $I_F=50\text{mA}$ | -     | 15     | -    | deg           |

\*1 Tolerance of dominant wavelength is  $\pm 1$ nm

\*2 Tolerance of luminous intensity is  $\pm 15\%$

### Maximum Forward DC Current

