


MATERIALS

BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE



SPECIFICATIONS	UNITS	VALUE	DESCRIPTION
IMPEDANCE	OHMS	50	
FREQUENCY	GHz	18	DC TO 18 GHz
RETURN LOSS	dB	≤ 0.10	4 GHz
	dB	≤ 0.20	4 GHz TO ≤ 18 GHz
CONNECTOR			N FEMALE
LOAD RESISTANCE	OHMS	50± .25	
LOAD POWER HANDLING	WATTS	≤ 0.5	AT 18 GHz, 0°-50° C

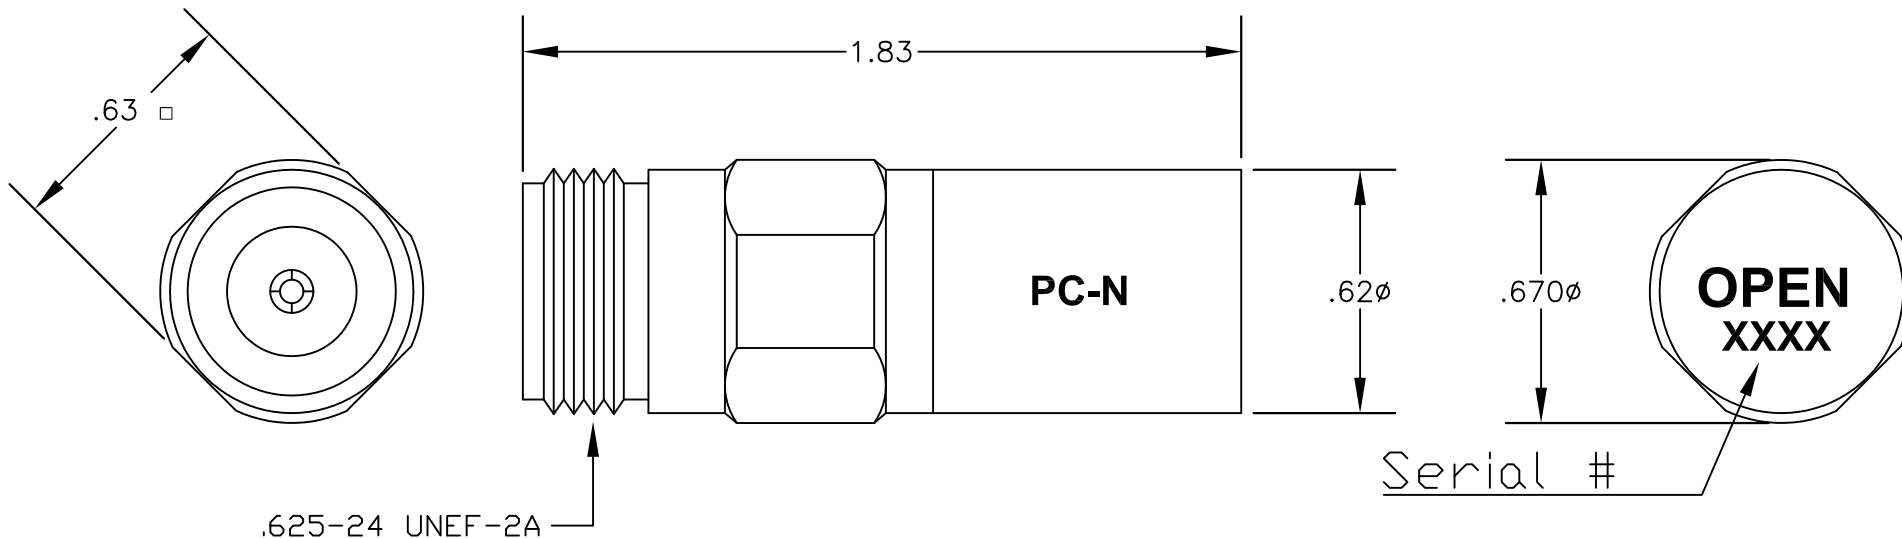

PASTERNACK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE PE5501-2		DES. OPEN CIRCUIT; FEMALE; PE5501-KIT COMPONENT			
REV. -	FSCM NO. 53919	CAD FILE 020809	SCALE N/A	SIZE A	127

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - DIMENSIONS ARE IN INCHES.