




B5817WS-B5819WS

SCHOTTKY BARRIER DIODE

SOD-323

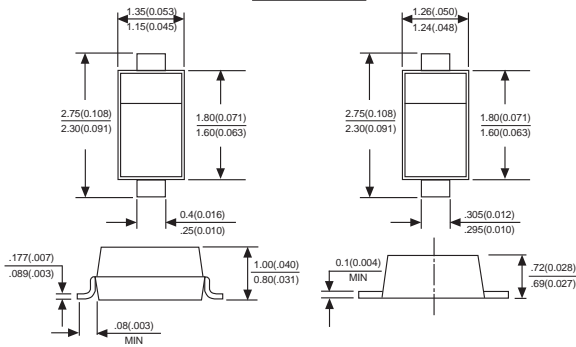

FEATURES

- ◆ For use in low voltage, high frequency inverters
- ◆ Free wheeling, and polanty protection applications

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case

Marking: B5817W:SJ, B5818W:SK, B5819W:SL

Maximum ratings and electrical characteristics, Single diode @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	B5817WS	B5818WS	B5819WS	UNITS
Peak repetitive peak reverse voltage	V_{RRM}				
Working peak	V_{RWM}	20	30	40	V
DC Blocking voltage	V_R				
RMS Reverse voltage	$V_{R(RMS)}$	14	21	28	V
Average rectified output current	I_o		1		A
Peak forward surge current @=8.3ms	I_{FSM}		9		A
Repetitive peak forward current	I_{FRM}		625		mA
Power dissipation	P_d		200		mW
Thermal resistance junction to ambient	$R_{\theta JA}$		625		K/W
Storage temperature	T_{STG}		-65 to +150		$^{\circ}\text{C}$
Non-Repetitive peak reverse voltage	V_{RM}	20	30	40	V

Electrical ratings @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions	
Reverse breakdown voltage	$V_{(BR)}$	20		V	$I_R=1\text{mA}$	B5817WS
		30		V		B5818WS
		40		V		B5819WS
Reverse voltage leakage current	I_R		1	mA	$V_R=20\text{V}$	B5817WS
					$V_R=30\text{V}$	B5818WS
					$V_R=40\text{V}$	B5819WS
Forward voltage	V_F		0.45	V	$I_F=1\text{A}$ $I_F=3\text{A}$	B5817WS
			0.75	V		B5818WS
			0.55	V		B5819WS
		0.6	0.9	V		
Diode capacitance	C_D		120	pF	$V_R=4\text{V}, f=1.0\text{MHz}$	

RATINGS AND CHARACTERISTIC CURVES B5817WS-B5819WS

FIG. 1- FORWARD CURRENT DERATING CURVE

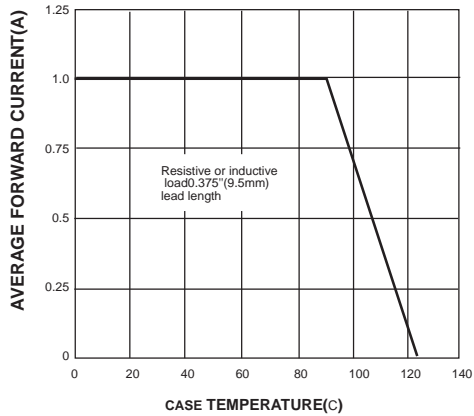


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

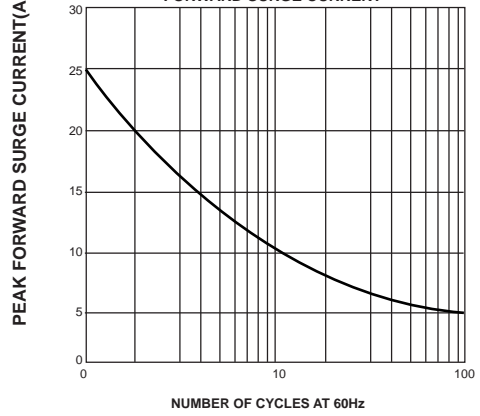


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

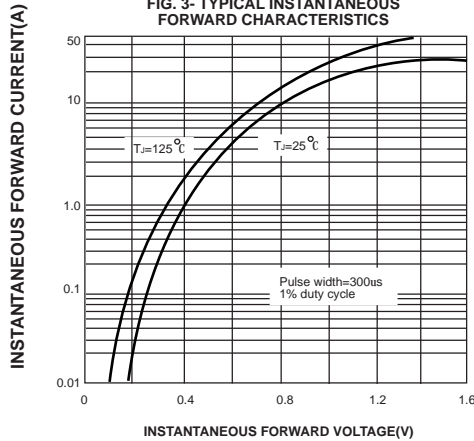


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

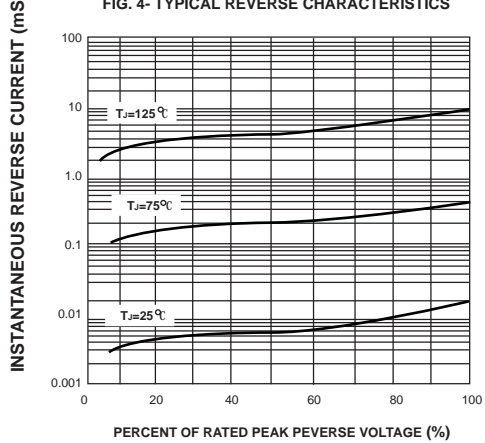


FIG. 5- TYPICAL JUNCTION CAPACITANCE


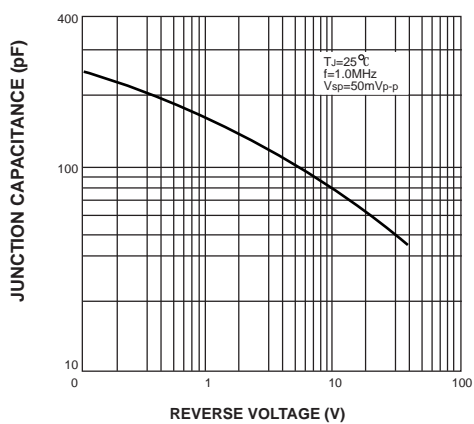


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

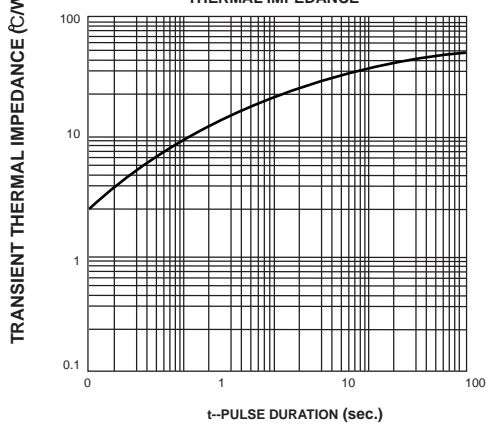


RATINGS AND CHARACTERISTIC CURVES B5817WS-B5819WS

PACKAGE OUTLINE


Plastic surface mounted package

SOD-323

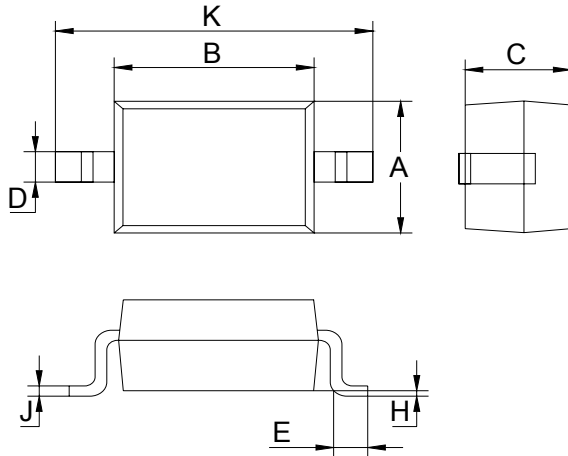

SOD-323		
Dim	Min	Max
A	1.275	1.325
B	1.675	1.725
C	0.9 Typical	
D	0.25	0.35
E	0.27	0.37
H	0.02	0.1
J	0.1 Typical	
K	2.6	2.7
All Dimensions in mm		

SOLDERING FOOTPRINT

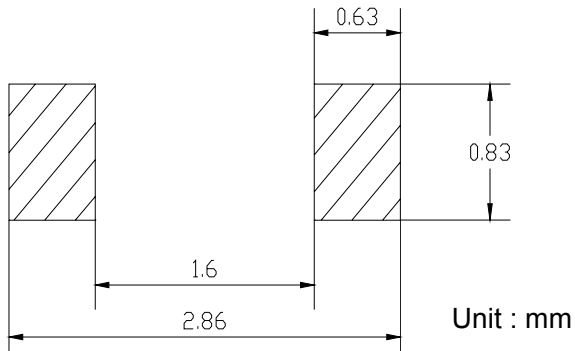

PACKAGE INFORMATION

Device	Package	Shipping
BZT52C2V0S-BZT52C39S	SOD-323	3000/Tape&Reel