


.80

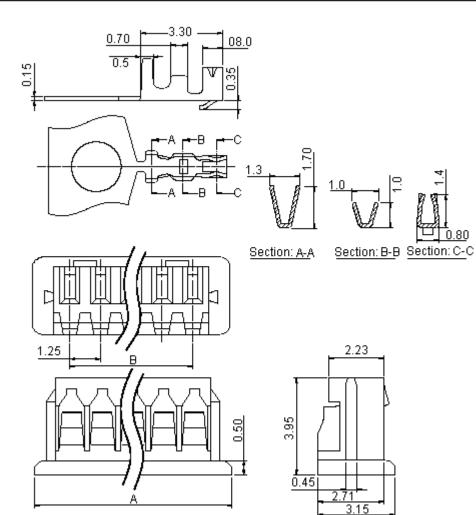

## **Specifications:**

Current rating Voltage rating Maximum contact resistance Minimum insulation resistance Withstanding voltage Temperature range Material: Insulator Contact material Contact

: 1A ac, dc.

: 125V ac, dc.

: 20mΩ.

: 100MΩ.

: 250V/minute.

: -40°C to +85°C.

- : High temperature material.
- : Phosphor bronze.

: Tin plated.

**Dimensions : Millimetres** 

believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or or	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
		Jagan	07/10/09	]	1.25mm Receptacle Housing - W2B		
		CHECKED BY:	DATE:	SIZE DWG NO.	M10002388	ELECTRONIC FILE 1578138-1578152-DWG	REV A
		Ramya	07/10/09				
		APPROVED BY:	DATE:				
		Farnell	21/10/09	SCALE: NTS	U.O.M.: mm	SHEET: 1 OI	0F 2