

# 2.54mm (0.1") Pin Header

(Triple Row)

2203 Series







## APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Variable pin length.
3. Standoffs facilitate post soldering clean.
4. Suggestion mating with 2238, 2239 & 2713 series.
5. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.B.T

Recommended P.C.Board  
 Hole Layout

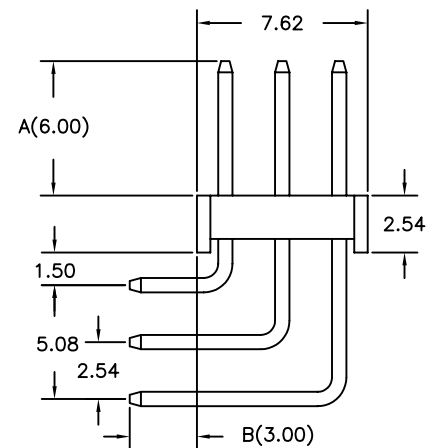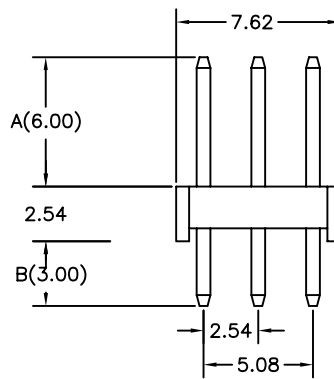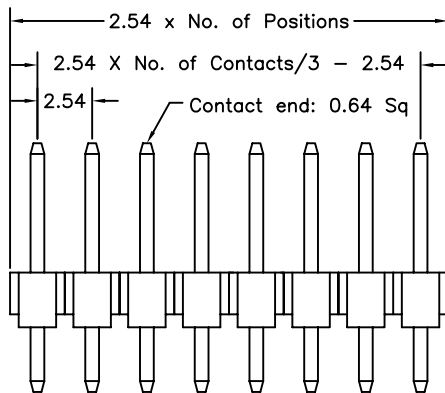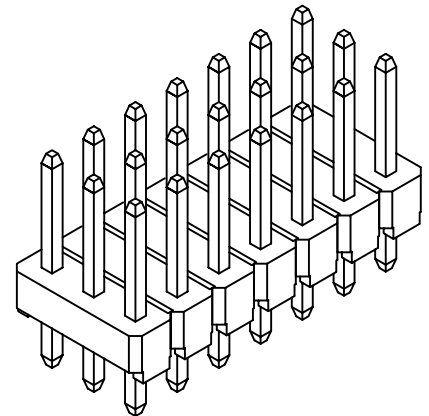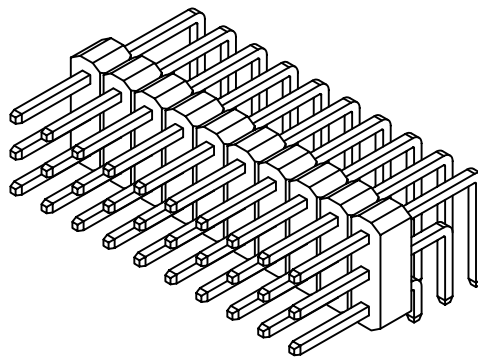

## Order Information 2203 Series

Example:  -  -  -  -  -  - Null:PBT  
 HT:Nylon  
 6T

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
<input type="text" value="2203"/>	<input type="text" value="09 to 120 Contacts"/>	Straight <input type="text" value="S"/> Right Angle <input type="text" value="R"/>	Tin Plated <input type="text" value="01"/> Gold Plated <input type="text" value="02"/> Flash <input type="text" value="10"/> $10 \mu$ " <input type="text" value="10"/> $30 \mu$ " <input type="text" value="30"/>	A <input type="text" value="6.0"/> B <input type="text" value="3.0"/>