

Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available 1,78.
- Series 364 and 464 single and double row PCB interconnects offer 2,16 profile above board.
- Series 335 and 435 use MM #3516 pins. See page 179 for details.
- Series 364 and 464 use MM #6458 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

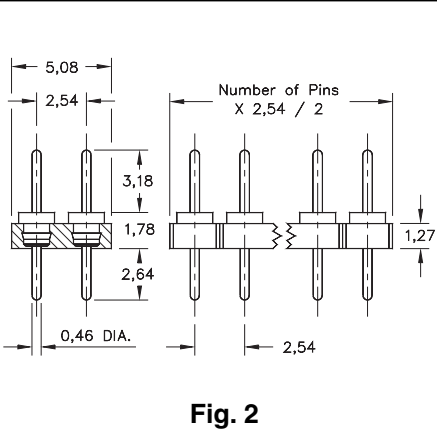
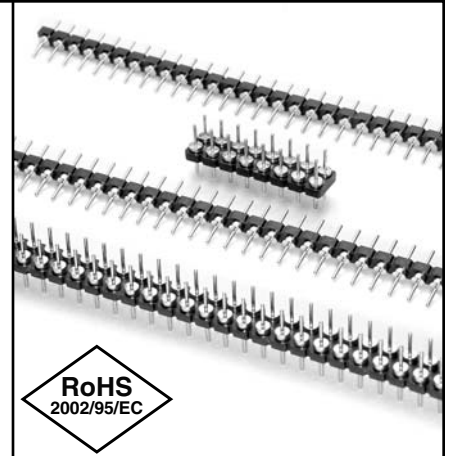


Fig. 2

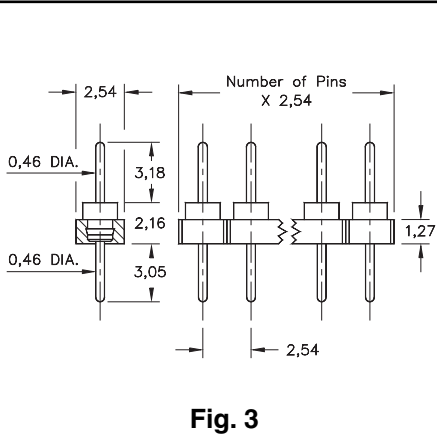


Fig. 3

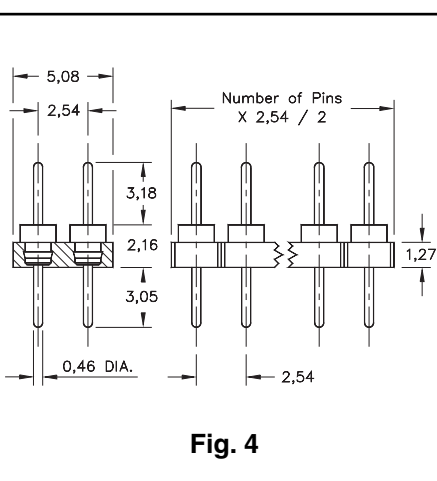


Fig. 4

Ordering Information

Fig. 1	Single Row	1,78 Profile Pin Header
	Specify # of pins	335-XX-1__-00-160000 └──────────┬──────────> 01-32
Fig. 2	Double Row	1,78 Profile Pin Header
	Specify # of pins	435-XX-2__-00-160000 └──────────┬──────────> 02-72
Fig. 3	Single Row	2,16 Profile Pin Header
	Specify # of pins	364-10-1__-00-580000 └──────────┬──────────> 01-32
Fig. 4	Double Row	2,16 Profile Pin Header
	Specify # of pins	464-10-2__-00-580000 └──────────┬──────────> 02-72

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select \diamond plating code.

SPECIFY PLATING CODE XX=	10 \diamond	90	40 \diamond	
Pin Plating	0,25 μ Au	5,08 μ Sn/Pb	5,08 μ Sn	