


MEGGITT SIGMA
AXIAL INDUCTORS
SMD INDUCTORS
THIN FILM PRINTED INDUCTORS
POWER CHOKES IN
RADIAL AND AXIAL STYLE

RF Inductor Moulded

TYPE MSC30 SERIES

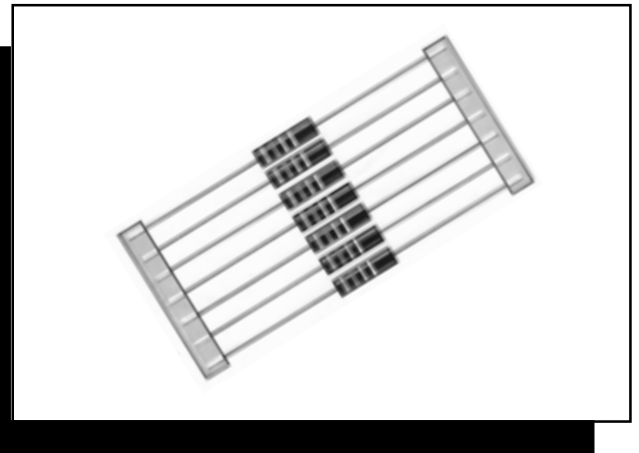

The Sigma MSC30 is a fully moulded sister to the well known SC30 series. The characteristics, tolerance, Q, SRF and DC resistance mirror exactly the SC30. The current carrying capacity is similar although the specification is slightly derated due to the higher measuring temperature. This fully moulded and colour banded construction provides excellent environmental protection at a surprisingly attractive price.


MEGGITT SIGMA KEY FEATURES

- ATTRACTIVELY PRICED
- FULLY MOULDED CONSTRUCTION
- COLOUR BANDED CODING
- RUGGED MOULDED CONSTRUCTION
- WIDE INDUCTANCE R1 - 1000 μ H
- $\pm 2\%$, $\pm 5\%$ SELECTION TOL. POSSIBLE
- SPECIAL DESIGNS WELCOME.

ELECTRICAL

Construction:	Phenolic LT4 Grade1 Class B Powdered iron & ferrite LT10 Grade 1 Class A
Max. Operating Temperature:	Phenolic -55°C to +125°C Powdered Iron & ferrite -55°C to +105°C
Max. Temperature Rise:	Phenolic 35°C Powdered Iron & ferrite 15°C
Ambient Temperature:	90°C
Dielectric Withstand:	Sea Level 1000V.RMS
Lead Pull Strength:	2.27 kg
Inductance Value Range:	Phenolic R10 - 1µh Powdered Iron 1R1 - 27µh Ferrite 30µh - 1000 µh
Weight:	0.5g max.

DIMENSIONS

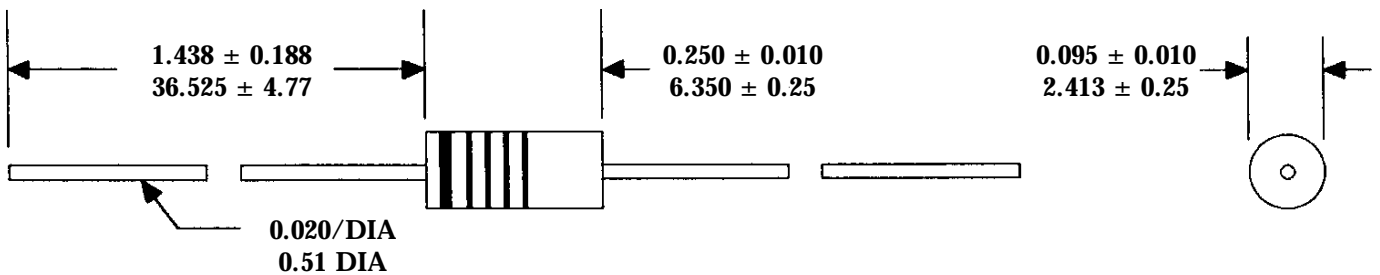

- Manufactured to meet BS9751 N0001 pattern A but released to commercial standard.
- Colour banded in accordance with MIL - C - 15305

All Dimensions are nominal and in mm, unless otherwise shown. Do Not Scale.

HOW TO ORDER

COMMON PART	INDUCTANCE VALUE	TOLERANCE	PACK STYLE
MSC 30 - Moulded RF Inductor	Inductance Code See Table above	K ± 10% J ± 5%	T - 500 pcs Taped B - 1000 pcs Taped R - 2500 pcs Taped

Inductance Code	Inductance μH	Q Min.	Test Freq. (L&Q) MHz	SRF (Min) MHz	DCR (Max) ohms	Rated DC Current mA at 90°C
R10	0.10±10%	40	25	680	0.08	1350
R11	0.11±5%	40	25	660	0.085	1309
R12	0.12±10%	40	25	640	0.09	1270
R13	0.13±5%	38	25	625	0.095	1239
R15	0.15±10%	38	25	600	0.10	1200
R16	0.16±5%	35	25	580	0.11	1151
R18	0.18±10%	35	25	550	0.12	1105
R20	0.20±5%	33	25	530	0.13	1059
R22	0.22±10%	33	25	510	0.14	1025
R24	0.24±5%	33	25	475	0.15	986
R27	0.27±10%	33	25	430	0.16	960
R30	0.30±5%	30	25	420	0.19	876
R33	0.33±10%	30	25	410	0.22	815
R36	0.36±5%	30	25	385	0.26	749
R39	0.39±10%	30	25	365	0.30	700
R43	0.43±5%	30	25	345	0.325	670
R47	0.47±10%	30	25	330	0.35	650
R51	0.51±5%	30	25	310	0.42	589
R56	0.56±10%	30	25	300	0.50	545
R62	0.62±5%	28	25	290	0.55	515
R68	0.68±10%	28	25	275	0.60	495
R75	0.75±5%	28	25	265	0.71	453
R82	0.82±10%	28	25	250	0.85	415
R91	0.91±5%	25	25	240	0.925	397
1R0	1.0±10%	25	25	230	1.00	385
1R1	1.1±5%	25	7.9	165	0.17	607
1R2	1.2±10%	25	7.9	150	0.18	590
1R3	1.3±5%	28	7.9	145	0.20	560
1R5	1.5±10%	28	7.9	140	0.22	535
1R6	1.6±5%	30	7.9	135	0.25	501
1R8	1.8±10%	30	7.9	125	0.30	455
2R0	2.0±5%	30	7.9	120	0.35	425
2R2	2.2±10%	30	7.9	115	0.40	395
2R4	2.4±5%	37	7.9	109	0.46	380
2R7	2.7±10%	37	7.9	100	0.55	355
3R0	3.0±5%	45	7.9	95	0.70	299
3R3	3.3±10%	45	7.9	90	0.85	270
3R6	3.6±5%	45	7.9	85	0.925	260
3R9	3.9±10%	45	7.9	80	1.00	250
4R3	4.3±5%	45	7.9	77	1.10	240
4R7	4.7±10%	45	7.9	75	1.20	230
5R1	5.1±5%	50	7.9	69	1.47	216
5R6	5.6±10%	50	7.9	65	1.80	185
6R2	6.2±5%	50	7.9	62	1.90	180
6R8	6.8±10%	50	7.9	60	2.00	180
7R5	7.5±5%	50	7.9	57	2.35	165
8R2	8.2±10%	55	7.9	55	2.70	155
9R1	9.1±5%	55	7.9	52	3.00	145
100	10±10%	55	7.9	50	3.70	130
110	11±5%	45	2.5	45	2.60	156
120	12±10%	45	2.5	40	2.70	155
130	13±5%	45	2.5	38	2.80	150
150	15±10%	45	2.5	35	2.80	150
160	16±5%	45	2.5	33	2.90	147
180	18±10%	50	2.5	30	3.10	145
200	20±5%	50	2.5	27.5	3.20	142
220	22±10%	50	2.5	25	3.30	140
240	24±5%	50	2.5	23	3.40	137
270	27±10%	50	2.5	20	3.50	135
300	30±5%	45	2.5	22	3.30	132
330	33±10%	45	2.5	24	3.40	130
360	36±5%	45	2.5	23	3.50	127
390	39±10%	45	2.5	22	3.60	125
430	43±5%	45	2.5	21	4.10	116

Continued on page 4

Inductance Code	Inductance μ H	Q Min.	Test Freq. (L&Q) MHz	SRF (Min) MHz	DCR (Max) ohms	Rated DC Current mA at 90°C
470	47 \pm 10%	45	2.5	20	4.50	110
510	51 \pm 5%	45	2.5	19	5.00	105
560	56 \pm 10%	45	2.5	18	5.70	100
620	62 \pm 5%	50	2.5	16.5	6.20	94
680	68 \pm 10%	50	2.5	15	6.70	92
750	75 \pm 5%	50	2.5	14.5	7.0	89
820	82 \pm 10%	50	2.5	14	7.3	88
910	91 \pm 5%	50	2.5	13.5	7.7	85
101	100 \pm 10%	50	2.5	13	8.0	84
111	110 \pm 5%	30	0.79	12.5	11.0	71
121	120 \pm 10%	30	0.79	12	13	66
131	130 \pm 5%	30	0.79	11.5	14	63
151	150 \pm 10%	30	0.79	11	15	61
161	160 \pm 5%	30	0.79	10.5	16	59
181	180 \pm 10%	30	0.79	10	17	57
201	200 \pm 5%	30	0.79	9.5	19	54
221	220 \pm 10%	30	0.79	9	21	52
241	240 \pm 5%	30	0.79	8.5	23	49
271	270 \pm 10%	30	0.79	8	25	47
301	300 \pm 5%	30	0.79	7.5	27	46
331	330 \pm 10%	30	0.79	7	28	45
361	360 \pm 5%	30	0.79	6.75	32	41
391	390 \pm 10%	30	0.79	6.5	35	40
431	430 \pm 5%	30	0.79	6.25	39	37
471	470 \pm 10%	30	0.79	6	42	36
511	510 \pm 5%	30	0.79	5.5	44	35
561	560 \pm 10%	30	0.79	5	46	35
621	620 \pm 5%	30	0.79	4.6	53	32
681	680 \pm 10%	30	0.79	4	60	30
751	750 \pm 5%	30	0.79	4	63	29
821	820 \pm 10%	30	0.79	3.8	65	29
911	910 \pm 5%	30	0.79	3.6	69	28
102	1000 \pm 10%	30	0.79	3.4	72	28



Meggitt Electronic Components Ltd. Ohmic House, Westmead Industrial Estate, Swindon, Wilts. SN5 7US
 Telephone:(01793)487301(Admin.) (01793)611666 (Sales) EMail:sales@megelec.co.uk Fax:(01793) 611777

This publication is issued to provide outline information only and (unless specifically agreed to the contrary by the Company in writing) is not to form part of any order or be regarded as a representation relating to the products or service concerned. We reserve the right to alter without notice the specification, design, price or conditions of supply of any product or service. Whilst Meggitt Electronic Components products are of the very highest quality and reliability, all electronic components can occasionally be subject to failure. Where failure of a Meggitt Electronic Components product could result in life threatening consequences, then the circuit and application must be discussed with the Company. Such areas might include ECG, respiratory, and other medical and nuclear applications and any non fail safe applications circuit.