

SEMICONDUCTOR PROTECTION FUSES



PROTISTOR® FUSES

500-660V AC

gRB/URB FROM 20 TO 400A

SIZE: 000

Features/Benefits

- **Extremely High Interrupting Rating Fuses:**
Protection of Power Semiconductors according to IEC 269.1 & 4 and EN 60269-1.4
- **500-660V Voltage Rating** (Rating 20 to 400A)
- **gR Class** (gRB Ratings 20 to 125A) According to VDE 636-23.
-Full range protection
-Improving safety and protection
-Allows selective coordination
- **aR Class** (URB Ratings 75 to 400A) According to VDE 636-23 and IEC 269.4
- **Two models according to BS 88-4 and EN 60269.4 Standards:** Z3 Drawing (74mm Between Axes) External open fuse with and without indicator



APPLICATIONS DATA

VOLTAGE RATING U_N (V)	CLASS	CURRENT RATING I_N (A)	PRE-ARCING $i^2t @ 1 \text{ ms}$ i^2t_p (A ² s)	TOTAL CLEARING $i^2t @ U_N$ i^2t_t (A ² s)	WATT LOSSES		TESTED INTERRUPTING RATING	ESTIMATED INTERRUPTING RATING
					0.8 I_N	I_N		
660 690+6%	gRB	20	12	80	3.8	7	200 kA @ 660 V	300 kA @ 660 V
		25	20	150	5.0	9		
		32	39	270	5.5	10		
		40	70	460	6.6	12		
		50	102	730	7.7	14		
		63	210	1500	8.8	16		
		80	475	2900	9.9	18		
		100	970	6000	11	20		
		125	1900	11800	11.6	21		
		660 690+6%	URB	75	350	2250		
80	390			2500	11.6	21		
100	690			4200	12.7	23		
110	950			6800	13.5	24.5		
125	1300			8900	14.3	26		
160	2700			16000	17.0	31		
200	5250			31500	19.8	36		
250	9900			52000	24.8	45		
315	15500			82000	31.9	58		
500	URB			350	22400	110000	31.9	58
		400	33200	160000	36.3	66		


Minimum operating voltage for the separated trip-indicator: 20V

BS88

SEMICONDUCTOR PROTECTION FUSES




British Standard without open fuse indicator

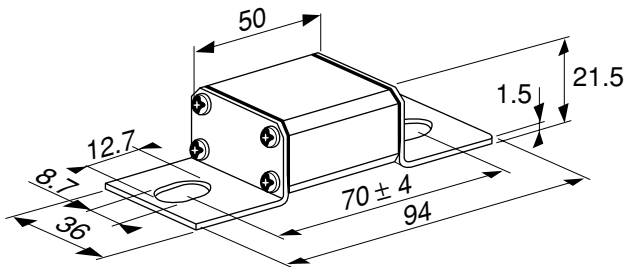

CURRENT RATING	CATALOG NO.	REF #	PACK.
20	6,6 gRB 000 BS88/020	T330044	10 (125 g)
25	6,6 gRB 000 BS88/025	V330045	
32	6,6 gRB 000 BS88/032	W330046	
40	6,6 gRB 000 BS88/040	X330047	
50	6,6 gRB 000 BS88/050	Z330049	
63	6,6 gRB 000 BS88/063	A330050	
80	6,6 gRB 000 BS88/080	N330108	
100	6,6 gRB 000 BS88/100	H330103	
125	6,6 gRB 000 BS88/125	P330109	
75	6,6 URB 000 BS88/075	B330051	
80	6,6 URB 000 BS88/080	C330044	
100	6,6 URB 000 BS88/100	D330045	
110	6,6 URB 000 BS88/110	E330046	
125	6,6 URB 000 BS88/125	E330047	
150	6,6 URB 000 BS88/150	F330049	
160	6,6 URB 000 BS88/160	F330050	
200	6,6 URB 000 BS88/200	G330108	
250	6,6 URB 000 BS88/250	H330103	
315	6,6 URB 000 BS88/315	J330109	
350	5 URB 000 BS88/350	X330051	
400	5 URB 000 BS88/400	G330194	



British Standard with external open fuse trip-indicator

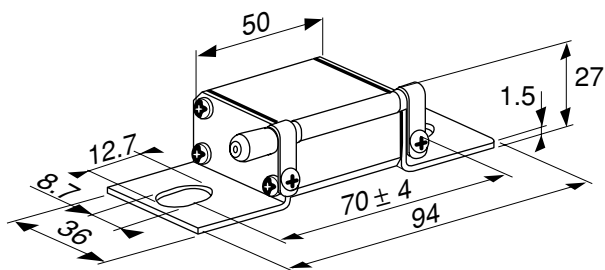

CURRENT RATING	CATALOG NO.	REF #	PACK.
20	6,6 gRB 000 BS88P/020	Y330117	10 (125 g)
25	6,6 gRB 000 BS88P/025	Z330118	
32	6,6 gRB 000 BS88P/032	A330119	
40	6,6 gRB 000 BS88P/040	B330120	
50	6,6 gRB 000 BS88P/050	C330121	
63	6,6 gRB 000 BS88P/063	D330122	
80	6,6 gRB 000 BS88P/080	E330123	
100	6,6 gRB 000 BS88P/100	F330124	
125	6,6 gRB 000 BS88P/125	G330125	
75	6,6 URB 000 BS88P/075	H330126	
80	6,6 URB 000 BS88P/080	J330127	
100	6,6 URB 000 BS88P/100	K330128	
110	6,6 URB 000 BS88P/110	L330129	
125	6,6 URB 000 BS88P/125	M330130	
150	6,6 URB 000 BS88P/150	N330131	
160	6,6 URB 000 BS88P/160	P330132	
200	6,6 URB 000 BS88P/200	Q330133	
250	6,6 URB 000 BS88P/250	R330134	
315	6,6 URB 000 BS88P/315	S330135	
350	5 URB 000 BS88P/350	T330036	
400	5 URB 000 BS88P/400	H330195	

The use of MC 6.3 GR 2-5N blown fuse remote sensing microswitch is possible.
 Ref. Number: Y 310015 mounted on separate trip-indicator.
 See Microswitch section page J12, J10.