


Colour-Coded Compression Connectors

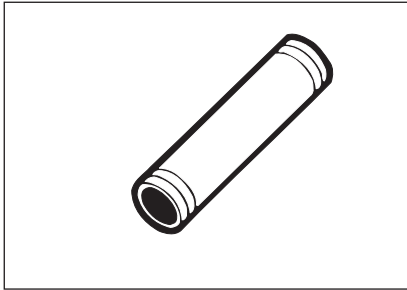

Copper Compression Connectors

- For use with copper conductor: AWG stranded, flexible cable, welding cable and portable cord
- Specially designed for industrial and building applications
- Made of high conductivity seamless copper tubing
- Tin-plated for corrosion resistance
- Specially chamfered barrel for ease of installation
- Colour-coded for matching die identification
- Can be used for high voltage application up to 35 kV provided proper high voltage insulation techniques are used
- U.L. Listed for AWG conductor when installed with Blackburn, Burndy, T&B or Anderson tools
- Comply with Subpart 111.60-17 of Federal Register's Coast Guard Electrical Engineering Rules and Regulations

Long Barrel Connectors

- Ideal for industrial, oil rig, mining, welding and transportation electrical termination applications
- Heavy duty design which permits additional crimp for added mechanical strength

Type CU — Copper Splices, Long Barrel

Cat. No.	Conductor Size AWG (CU)	Flexible Conductor		Length L (in.)	Die Colour Code
		CMA	Stranding		
CU8	8 str.	8	37/24	1 3/4	Red
CU6	6 str.	6	61/24		Blue
CU4	4 str.	5	91/24		Grey
CU2	2 str.	3	125/24	1 1/8	Brown
CU1	1 str.	2	150/24	2	Green
CU10	1/0 str.	1	225/24		Pink
CU20	2/0 str.	1/0	275/24	2 1/8	Black
CU30	3/0 str.	2/0	325/24	2 1/4	Orange
CU40	4/0 str.	—	—	2 3/4	Purple
CU250	250 KCMIL	3/0	450/24	3 3/8	Yellow
CU300	300 KCMIL	4/0	550/24	3 1/2	White
CU350	350 KCMIL	263	650/24	3 3/4	Red
CU400	400 KCMIL	313	755/24		Blue
CU500	500 KCMIL	373	925/24	4 1/4	Brown
CU600	600 KCMIL	444	1100/24	4 1/4	Green
CU750	750 KCMIL	535	1325/24	4 3/4	Black
CU1000	1000 KCMIL	646	1600/24	5 1/8	—
		777	1925/24		

