


402/403
Series:

Ø 6.35 mm Mounting Raised Lens

- Front panel replaceability
- Available with lamp test facility
- Panel mounting and wiring socket accessories (see pages 27 and 28)
- MLG 20
- MTBF 90,000 hrs

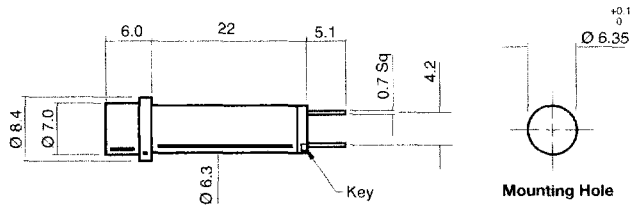

Scale 1 : 1
Dimensions in mm (Typical)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
402 - 503 - 04	Red		2.1	20	68	650			
402 - 506 - 04	Orange		2.1	20	100	610			
402 - 509 - 04	Yellow		2.2	20	68	585			
402 - 512 - 04	Green		2.2	20	100	563			
402 - 503 - 20	Red		5/6	15/20	51/68	650			
402 - 506 - 20	Orange		5/6	15/20	75/100	610			
402 - 509 - 20	Yellow		5/6	15/20	51/68	585			
402 - 512 - 20	Green	Water Clear	5/6	15/20	75/100	563	180		
402 - 503 - 21	Red		12	20	68	650			
402 - 506 - 21	Orange		12	20	100	610			
402 - 509 - 21	Yellow		12	20	68	585			
402 - 512 - 21	Green		12	20	100	563			
402 - 503 - 22	Red		24	20	68	650			
402 - 506 - 22	Orange		24	20	100	610			
402 - 509 - 22	Yellow		24	20	68	585		0	0
402 - 512 - 22	Green		24	20	100	563		to	to
403 - 503 - 04	Red		2.1	20	68	650		+ 85	+ 85
403 - 506 - 04	Orange		2.1	20	100	610			
403 - 509 - 04	Yellow		2.2	20	68	585			
403 - 512 - 04	Green		2.2	20	100	563			
403 - 503 - 20	Red		5/6	15/20	51/68	650			
403 - 506 - 20	Orange		5/6	15/20	75/100	610			
403 - 509 - 20	Yellow		5/6	15/20	51/68	585			
403 - 512 - 20	Green	Coloured Diffused	5/6	15/20	75/100	563	180		
403 - 503 - 21	Red		12	20	68	650			
403 - 506 - 21	Orange		12	20	100	610			
403 - 509 - 21	Yellow		12	20	68	585			
403 - 512 - 21	Green		12	20	100	563			
403 - 503 - 22	Red		24	20	68	650			
403 - 506 - 22	Orange		24	20	100	610			
403 - 509 - 22	Yellow		24	20	68	585			
403 - 512 - 22	Green		24	20	100	563			
			V	mA	mcd	nm	deg	°C	°C