

SPECIFICATIONS

Mechanical

Contact Normal Force: 75g min.
Durability: 100 Cycles
Contact Retention Force: 0.45kg min.


Electrical

Current Rating: 1.0A, 30° Rise above Ambient
Contact Resistance: 30mW max. initial, 40mW max. after Test
Dielectric Withstand Voltage: 500V min. at Sea Level
Pin to Pin Insulation Resistance: 1000MW min.


Physical

Housing: Thermoplastic, UL 94V-0 rated in Brown Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Storage Temperature Range: -55° to +105°

EH Series
Vertical, T/H Type
1.27mm [.050"] Pitch
132 Pos.



DRAWING

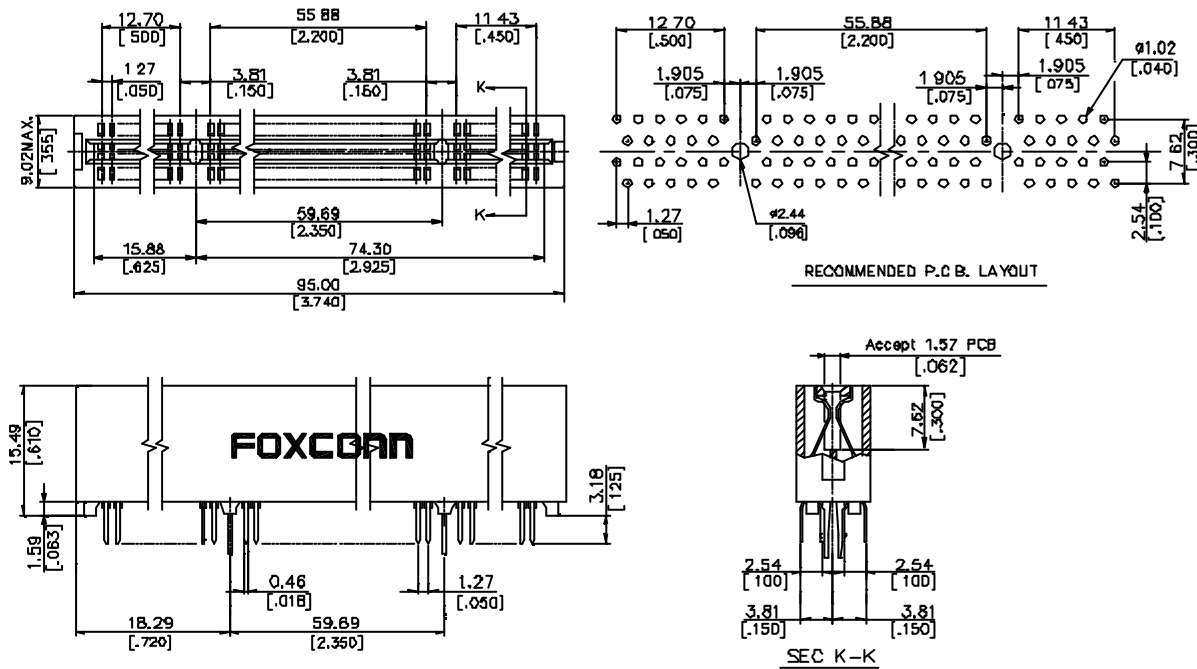

ORDERING INFORMATION

PRODUCT NO.: **E H 0 6 6 * * - D P B - ****

Series prefix ————— E
 Cardedge Conn. ————— H
 Tail Type ————— 0
 No. of pos. ————— 66
 Tail Length ————— 6
 Plating Type ————— D
 Extension Code ————— P
 Gold Plating ————— B
 Plating Type: DN=Tin/Lead, DF=Lead Free
 Extension Code: P/N
 Gold Plating: 1=Gold Flash, 3=30u" Gold, 7=15u" Gold

EH0664*-DPB-**	3.56 [.140]
EH0661*-DPB-**	2.54 [.100]
EH0660*-DPB-**	3.18 [.125]
P/N	DIM. T