

**Silicon PNP Power Transistor**

**2SA1908**

**DESCRIPTION**



- Collector-Emitter Breakdown Voltage-  
 $V_{(BR)CEO} = -120V(\text{Min})$
- Good Linearity of  $h_{FE}$
- Complement to Type 2SC5100

**APPLICATIONS**

- Designed for audio and general purpose applications


**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-120	V
$V_{CEO}$	Collector-Emitter Voltage	-120	V
$V_{EBO}$	Emitter-Base Voltage	-6	V
$I_C$	Collector Current-Continuous	-8	A
$I_B$	Base Current-Continuous	-3	A
$P_C$	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	75	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

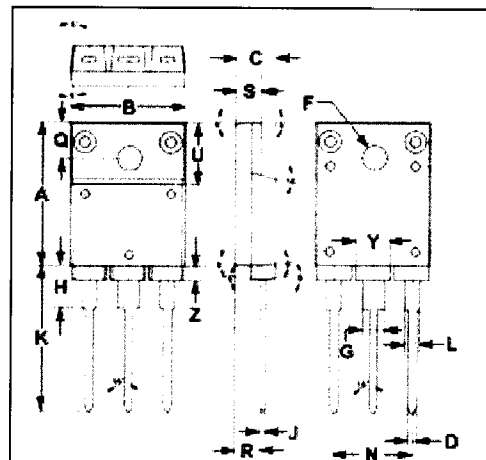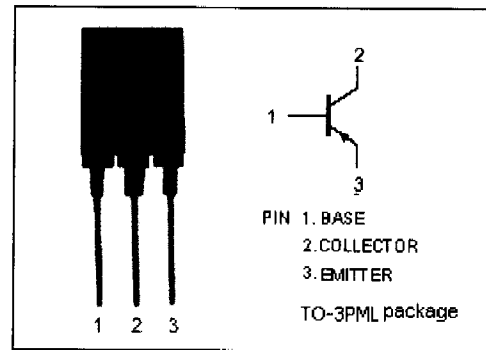

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.90	16.10
C	5.50	5.70
D	0.90	1.10
F	3.30	3.50
G	2.90	3.10
H	5.90	6.10
J	0.595	0.605
K	22.30	22.50
L	1.90	2.10
N	10.80	11.00
Q	4.90	5.10
R	3.75	3.95
S	3.20	3.40
U	9.90	10.10
Y	4.70	4.90
Z	1.90	2.10

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



## Silicon PNP Power Transistor

## 2SA1908

### ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -50\text{mA}; I_B = 0$	-120			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -3\text{A}; I_B = -0.3\text{A}$			-0.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB} = -120\text{V}; I_E = 0$			-10	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -6\text{V}; I_C = 0$			-10	$\mu\text{A}$
$h_{FE}$	DC Current Gain	$I_C = -3\text{A}; V_{CE} = -4\text{V}$	50			
$C_{OB}$	Collector Output Capacitance	$I_E = 0; V_{CB} = -10\text{V}; f = 1\text{MHz}$		300		pF
$f_T$	Current-Gain—Bandwidth Product	$I_E = 0.5\text{A}; V_{CE} = -12\text{V}$		20		MHz

#### Switching times

$t_{on}$	Turn-on Time	$I_C = -4\text{A}, R_L = 10\Omega,$ $I_{B1} = -I_{B2} = -0.4\text{A}, V_{CC} = -40\text{V}$		0.14		$\mu\text{s}$
$t_{stg}$	Storage Time			1.40		$\mu\text{s}$
$t_f$	Fall Time			0.21		$\mu\text{s}$

#### ◆ $h_{FE}$ classifications

O	P	Y
50-100	70-140	90-180