

**SPECIFICATIONS**

**Mechanical**

**Contact Normal Force:** 75g min.  
**Durability:** 100 Cycles  
**Contact Retention Force:** 0.45kg min.

**Electrical**

**Current Rating:** 1.0A, 30 Rise above Ambient  
**Contact Resistance:** 30mW max. initial, 40mW max. after Test  
**Dielectric Withstand Voltage:** 500V min. at Sea Level  
**Pin to Pin Insulation Resistance:** 1000MW min.

**Physical**


**Housing:** Thermoplastic, UL 94V-0 rated in White Color  
**Contact:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Storage Temperature Range:** -40 to +105

**PCI Connector**


**EH Series**  
**Vertical, T/H Type, 64 Bit 3.3V**  
**1.27mm [.050"] Pitch**  
**184 Pos.**



**DRAWING**

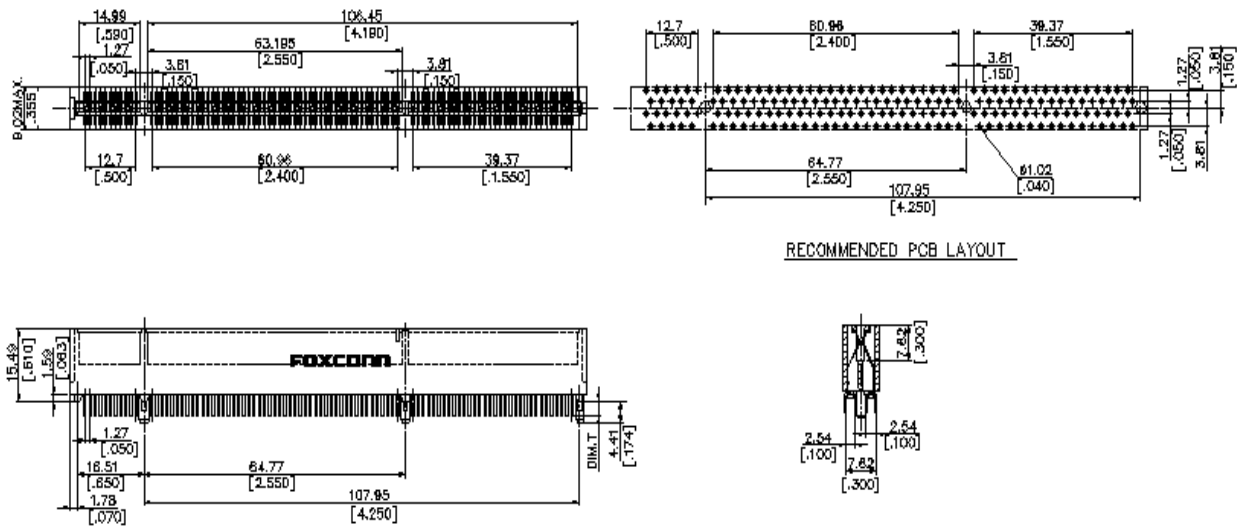

**ORDERING INFORMATION**

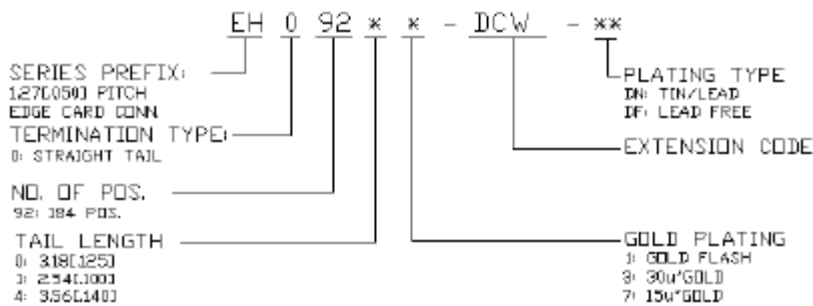

EH0924*-DCW-**	3.56[.140]
EH0921*-DCW-**	2.54[.100]
EH0920*-DCW-**	3.18[.125]
P/N	DIM.T

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.