


Aluminum Capacitors Axial Capacitor Style



FEATURES

- Long useful life: 3000 h at 105 °C
- Polarized aluminum electrolytic capacitors
- High ripple current capability
- Axial leads, insulated cylindrical aluminum case
- Charge/discharge proof
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912

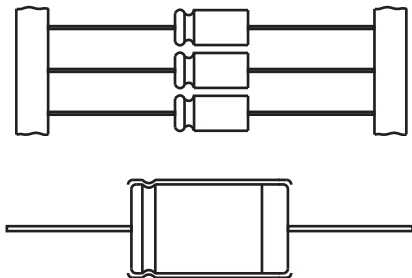

RoHS
COMPLIANT


APPLICATIONS

- Industrial and automotive electronics, audio/video, telecommunication systems, power supply units
- Coupling, smoothing, filtering, buffering and timing

QUICK REFERENCE DATA			
DESCRIPTION	UNIT	LOW VOLTAGE	HIGH VOLTAGE
Nominal case size (Ø D x L)	mm	6.5 x 18 to 10 x 25	
Rated capacitance range C _R	µF	4.7 to 470	2.2 to 22
Capacitance tolerance	%	- 10/+ 50	
Rated voltage range	V	16 to 100	160 to 250
Category temperature range	°C	- 40 to + 105	
Endurance test at upper category temp.	h	2000	
Useful life at 105 °C and I _R applied	h	3000	
Useful life at 85 °C and I _R applied	h	11 000	
Useful life at 40 °C and I _R applied	h	330 000	
Shelf life (0 V, 105 °C)	h	100	
Failure rate	10 ⁻⁹ /h	≤ 14	
Based on sectional specification		IEC 60384-4, EN 130300	
Based on detailed specifications		CECC 30301-003, CECC 30301-801 DIN 45910 Part 123, without quality assessment	
Climatic category IEC 60068 DIN 40040		40/105/56 GMF	

SELECTION CHART FOR C _R , U _R , AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm)							
C _R (µF)	U _R (V)						
	16	25	40	63	100	160	250
2.2	→	→	→	→	→	6.5 x 18	8 x 18
4.7	→	→	→	6.5 x 18	6.5 x 18	8 x 18	10 x 18
10	→	→	6.5 x 18	8 x 18	8 x 18	10 x 18	10 x 25
22	→	6.5 x 18	8 x 18	8 x 18	10 x 18	10 x 25	-
47	6.5 x 18	8 x 18	8 x 18	10 x 18	10 x 25	-	-
100	8 x 18	10 x 18	10 x 18	-	-	-	-
220	10 x 18	10 x 25	-	-	-	-	-
470	10 x 25	-	-	-	-	-	-

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

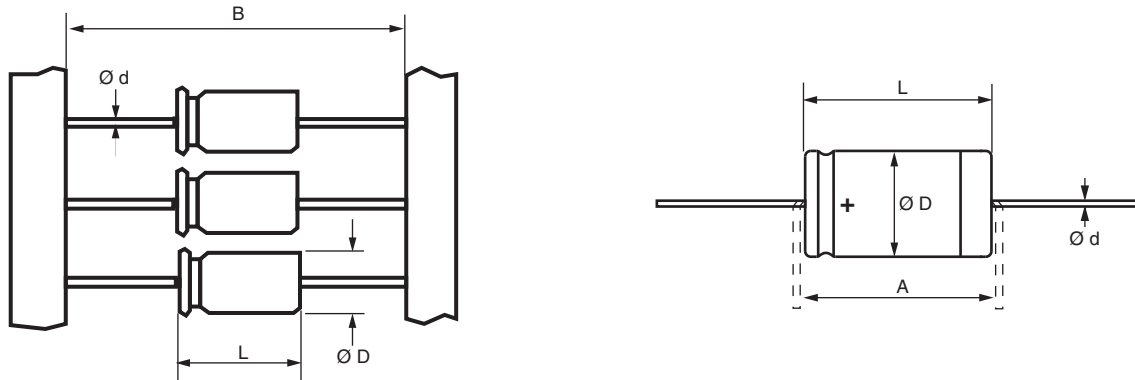

DIMENSIONS in millimeters, **MASS, PACKAGING, AND ORDERING CODE**

CASE SIZE Ø D x L	LEAD Ø d	Ø D _{max.}	L _{max.}	A _{min.}	B	WEIGHT APPROX. (g)	PACKAGING, ENDING OF ORDERING CODE, QUANTITIES			
							TAPED ON REEL		TAPED AMMO	
							CODE	PIECES	CODE	PIECES
6.5 x 18	0.8	6.9	18.5	25	73.0 ± 1.6	1.3	..A0W	1000	..B0W	1000
8 x 18	0.8	8.5	18.5	25	73.0 ± 1.6	1.7	..A0W	500	..B0W	500
10 x 18	0.8	10.5	18.5	25	73.0 ± 1.6	2.5	..A0W	500	..B0W	500
10 x 25	0.8	10.5	25.5	30	73.0 ± 1.6	3.3	..A0W	500	..B0W	500

ELECTRICAL DATA

SYMBOL	DESCRIPTION
C _R	Rated capacitance at 100 Hz
U _R	Rated voltage
tan δ	Max. dissipation factor at 100 Hz
R _{ESR}	Equivalent series resistance at 100 Hz (calculated from tan δ _{max.} and C _R)
Z	Max. impedance at 10 kHz
I _R	Rated alternating current (RMS) at 100 Hz and upper category temperature
T _a	Ambient temperature
T _{UC}	Upper category temperature
RH	Relative humidity
P	Ambient pressure

Note

- Unless otherwise specified, all electrical values apply at T_a = 20 °C, P = 80 kPa to 106 kPa, RH = 45 % to 75 %.

ORDERING EXAMPLE

The following table gives the ordering number.

The 16th place of ordering code refers to packaging for axial lead capacitors:

MALAEBC00FL210J... EBC 1000 µF 63 V 8 x 18
MALAEBC00FL210JA0W A = Taped on reel
MALAEBC00FL210JB0W B = Taped ammo

Please see Dimensions table for available versions.



ELECTRICAL DATA AND ORDERING INFORMATION							
U_R (V)	C_R 100 Hz (μ F)	NOMINAL CASE SIZE \varnothing D x L (mm)	$\tan \delta$ 100 Hz MAX.	R_{ESR} 100 Hz (Ω)	Z 10 kHz MAX. (Ω)	I_R 100 Hz T_{UC} (A)	CATALOG NUMBER MALA...
16	47	6.5 x 18	0.14	4.7	2.6	0.095	EBC00DL247DB0W
	100	8 x 18	0.14	2.2	1.2	0.15	EBC00FL310DB0W
	220	10 x 18	0.14	1.0	0.55	0.25	EBC00GL322DB0W
	470	10 x 25	0.14	0.47	0.26	0.45	EBC00GD347DB0W
25	22	6.5 x 18	0.11	8.0	4.1	0.060	EBC00DL222EB0W
	47	8 x 18	0.11	3.7	1.9	0.11	EBC00FL247EB0W
	100	10 x 18	0.11	1.8	0.90	0.18	EBC00GL310EB0W
	220	10 x 25	0.11	0.80	0.40	0.34	EBC00GD322EB0W
40	10	6.5 x 18	0.10	16	7.5	0.046	EBC00DL210GB0W
	22	8 x 18	0.10	7.2	3.4	0.080	EBC00FL222GB0W
	47	8 x 18	0.09	3.0	1.6	0.12	EBC00FL247GB0W
	100	10 x 18	0.09	1.4	0.75	0.21	EBC00GL310GB0W
63	4.7	6.5 x 18	0.07	24	12	0.038	EBC00DL147JB0W
	10	8 x 18	0.07	11	5.5	0.064	EBC00FL210JB0W
	22	8 x 18	0.07	5.1	2.5	0.10	EBC00FL222JB0W
	47	10 x 18	0.07	2.4	1.2	0.17	EBC00GL247JB0W
100	4.7	6.5 x 18	0.06	20	9.6	0.048	EBC00DL147LB0W
	10	8 x 18	0.06	9.5	4.5	0.073	EBC00FL210LB0W
	22	10 x 18	0.06	4.3	2.0	0.13	EBC00GL222LB0W
	47	10 x 25	0.06	2.0	1.0	0.22	EBC00GD247LB0W
160	2.2	6.5 x 18	0.10	72	55	0.022	EBC00DL122MB0W
	4.7	8 x 18	0.10	34	26	0.037	EBC00FL147MB0W
	10	10 x 18	0.10	16	12	0.061	EBC00GL210MB0W
	22	10 x 25	0.10	7.2	5.5	0.12	EBC00GD222MB0W
250	2.2	8 x 18	0.10	72	50	0.025	EBC00FL122NB0W
	4.7	10 x 18	0.10	34	23	0.037	EBC00GL147NB0W
	10	10 x 25	0.10	16	11	0.066	EBC00GD210NB0W

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	$U_R \leq 100$ V	$U_s = 1.15 \times U_R$
	$U_R \geq 160$ V	$U_s = 1.10 \times U_R$
Reverse voltage	-	$U_{rev} \leq 1$ V
Current		
Leakage current	$U_R \leq 100$ V $U_R, 300$ s $U_R \geq 160$ V $U_R, 300$ s	$I_{L/\mu A} \leq 0.0015 \times C_R/\mu F \times U_R/V + 3$ $I_{L/\mu A} \leq 0.0150 \times C_R/\mu F \times U_R/V + 10$



LOW TEMPERATURE BEHAVIOUR

Table for the calculation of the maximum 10 kHz impedance at low temperatures:

$$Z(10\text{ kHz})[\Omega] = \frac{\text{Tabular value}}{C_R[\mu\text{F}]}$$

T _a (°C)	RATED VOLTAGE (V)						
	16	25	40	63	100	160	250
- 25	2250	1500	850	600	450	1000	940
- 40	5400	3600	2040	1440	1080	5000	4600

The lower limit of the series resistance and impedance is determined by the ohmic part of the contact points and the foil resistance values. Therefore it will not always be possible to achieve calculated values below 0.05 Ω.

LIFETIME TABLE U_R ≤ 100 V

INTERRELATION BETWEEN ALTERNATING CURRENT, AMBIENT TEMPERATURE, AND LIFETIME																				
I/I _R (frequency dependent)							LIFETIME MULTIPLIER L (depending on I/I _R and T _a)													
FREQUENCY [Hz]							AMBIENT TEMPERATURE T _a [°C]													
50	100	250	500	1000	> 2500	10 K	40	45	50	55	60	65	70	75	80	85	90	95	100	105
0	0	0	0	0	0	0	200	127	81	53	35	23	16	11	7.4	5.1	3.6	2.6	1.84	1.33
0.18	0.20	0.22	0.23	0.24	0.25	0.26	195	123	79	52	34	23	15	10	7.2	5.0	3.5	2.5	1.81	1.31
0.36	0.40	0.44	0.46	0.48	0.50	0.52	179	115	74	48	32	21	14	9.9	6.9	4.8	3.4	2.4	1.73	1.26
0.54	0.60	0.66	0.69	0.72	0.75	0.78	158	102	66	44	29	20	13	9.1	6.3	4.5	3.2	2.3	1.63	1.19
0.72	0.80	0.88	0.92	0.96	1.00	1.04	135	87	57	38	26	17	12	8.3	5.8	4.1	2.9	2.1	1.51	1.10
0.90	1.00	1.10	1.15	1.20	1.25	1.30	112	73	49	33	22	15	10	7.3	5.1	3.6	2.6	1.9	1.37	1.00
1.08	1.20	1.32	1.38	1.44	1.50	1.56	90	60	40	27	19	13	9.0	6.3	4.5	3.2	2.3	1.7	1.21	
1.26	1.40	1.54	1.61	1.68	1.75	1.82	70	47	32	22	15	11	7.5	5.3	3.8	2.7	2.0	1.4	1.06	
1.44	1.60	1.76	1.84	1.92	2.00	2.08	54	37	25	18	12	8.8	6.2	4.4	3.2	2.3	1.7	1.2		
1.62	1.80	1.98	2.07	2.16	2.25	2.34	40	28	20	14	9.9	7.0	5.0	3.6	2.6	1.9	1.4	1.0		
1.80	2.00	2.20	2.30	2.40	2.50	2.60	30	21	15	11	7.7	5.6	4.0	2.9	2.2	1.6	1.2			
1.98	2.20	2.42	2.53	2.64	2.75	2.86	22	16	11	8.2	6.0	4.3	3.2	2.3	1.7	1.3				
2.16	2.40	2.64	2.76	2.88	3.00	3.12	16	11	8.4	6.1	4.5	3.3	2.5	1.8	1.4	1.0				
2.34	2.60	2.86	2.99	3.12	3.25	3.38	11	8.3	6.1	4.6	3.4	2.5	1.9	1.4	1.1					
2.52	2.80	3.08	3.22	3.36	3.50	3.64	7.9	5.9	4.5	3.4	2.5	1.9	1.5	1.1						
2.70	3.00	3.30	3.45	3.60	3.75	3.90	5.5	4.2	3.2	2.5	1.9	1.4	1.1							
2.88	3.20	3.52	3.68	3.84	4.00	4.16	3.9	3.0	2.3	1.8	1.4	1.1								
3.06	3.40	3.74	3.91	4.08	4.25	4.42	2.7	2.1	1.6	1.3	1.0									
3.24	3.60	3.96	4.14	4.32	4.50	4.68	1.8	1.5	1.2											
3.42	3.80	4.18	4.37	4.56	4.75	4.94	1.3	1.0												

Note

I_R 100 Hz alternating current [A] at upper category temperature T_{UC} taken from datasheet

I User current [A]

T_a Ambient temperature of capacitor [°C]

L Lifetime multiplier

Regard L as a function of ambient temperature (x-axis) and of current (y-axis); use the current-axis according to the frequency



LIFETIME TABLE $U_R > 100 V$

INTERRELATION BETWEEN ALTERNATING CURRENT, AMBIENT TEMPERATURE, AND LIFETIME																				
I/I_R (frequency dependent)							LIFETIME MULTIPLIER L (depending on I/I_R and T_a)													
FREQUENCY [Hz]							AMBIENT TEMPERATURE T_a [°C]													
50	100	250	500	1000	> 2500	10 K	40	45	50	55	60	65	70	75	80	85	90	95	100	105
0	0	0	0	0	0	0	200	127	81	53	35	23	16	11	7.4	5.1	3.6	2.6	1.84	1.33
0.17	0.20	0.23	0.25	0.26	0.27	0.28	194	123	79	52	34	23	15	10	7.2	5.0	3.5	2.5	1.81	1.31
0.34	0.40	0.46	0.50	0.52	0.54	0.56	178	114	74	48	32	21	14	9.9	6.9	4.8	3.4	2.4	1.73	1.26
0.51	0.60	0.70	0.74	0.78	0.80	0.84	158	102	66	44	29	20	13	9.1	6.3	4.5	3.2	2.3	1.63	1.19
0.68	0.80	0.93	0.99	1.04	1.07	1.12	133	87	57	38	26	17	12	8.3	5.8	4.1	2.9	2.1	1.51	1.10
0.85	1.00	1.16	1.24	1.30	1.34	1.40	110	73	49	33	22	15	11	7.3	5.1	3.6	2.6	1.9	1.37	1.00
1.02	1.20	1.39	1.49	1.56	1.61	1.68	88	59	40	27	19	13	9.0	6.3	4.5	3.2	2.3	1.7	1.21	
1.19	1.40	1.62	1.74	1.82	1.88	1.96	69	47	32	22	15	11	7.6	5.4	3.8	2.7	2.00	1.4	1.06	
1.36	1.60	1.86	1.98	2.08	2.14	2.24	53	37	26	18	12	8.8	6.2	4.5	3.2	2.3	1.7	1.2		
1.53	1.80	2.09	2.23	2.34	2.41	2.52	40	28	20	14	9.9	7.1	5.1	3.7	2.7	1.9	1.4	1.0		
1.70	2.00	2.32	2.48	2.60	2.68	2.80	30	21	15	11	7.8	5.6	4.1	3	2.2	1.6	1.2			
1.87	2.20	2.55	2.73	2.86	2.95	3.08	22	16	11	8.3	6.0	4.4	3.2	2.4	1.7	1.3				
2.04	2.40	2.78	2.98	3.12	3.22	3.36	16	12	8.5	6.2	4.6	3.4	2.5	1.9	1.4	1.0				
2.21	2.60	3.02	3.22	3.38	3.48	3.64	11	8.4	6.2	4.6	3.5	2.6	1.9	1.4	1.1					
2.38	2.80	3.25	3.47	3.64	3.75	3.92	8.0	6.0	4.5	3.4	2.6	1.9	1.5	1.1						
2.55	3.00	3.48	3.72	3.90	4.02	4.20	5.6	4.3	3.3	2.5	1.9	1.4	1.1							
2.72	3.20	3.71	3.97	4.16	4.29	4.48	3.9	3.0	2.3	1.8	1.4	1.1								
2.89	3.40	3.94	4.22	4.42	4.56	4.76	2.7	2.1	1.7	1.3	1.0									
3.06	3.60	4.18	4.46	4.68	4.82	5.04	1.9	1.5	1.2											
3.23	3.80	4.41	4.71	4.94	5.09	5.32	1.3	1.0												

combination
not
permitted

Note

I_R 100 Hz alternating current [A] at upper category temperature T_{UC} taken from datasheet
 I User current [A]
 T_a Ambient temperature of capacitor [°C]
 L Lifetime multiplier
 Regard L as a function of ambient temperature (x-axis) and of current (y-axis); use the current-axis according to the frequency

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN 130300 subclause 4.13	T _A = 105 °C; U _R applied 2000 h	- 15 % ≤ ΔC/C ≤ 15 % tan δ ≤ 1.3 x spec. limit Z ≤ 2 x spec. limit I _L (300 s) ≤ spec. limit
Useful life	CECC 30301 subclause 1.8.1	T _A = 105 °C; U _R and I _R applied 16 V ≤ U _R ≤ 100 V Cases 6.5 x 8 to 10 x 25: 3000 h 160 V ≤ U _R ≤ 250 V Cases 6.5 x 8 to 10 x 25: 3000 h	- 45 % ≤ ΔC/C ≤ 45 % tan δ ≤ 3 x spec. limit Z ≤ 3 x spec. limit I _L (300 s) ≤ spec. limit No short or open circuit Total failure percentage: ≤ 1 %
Shelf life (storage at high temperature)	IEC 60384-4/ EN 130300 subclause 4.17	T _A = 105 °C; no voltage applied 100 h After test: U _R to be applied for 30 min 24 h o 48 h before measurement	- 15 % ≤ ΔC/C ≤ 15 % tan δ ≤ 1.3 x spec. limit Z ≤ 2 x spec. limit I _L (300 s) ≤ 2 x spec. limit



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.