


HRW0202A

■ Features

- Low forward voltage drop and suitable for high efficiency rectifying.
- MPAK package is suitable for high density surface mounting and high speed assembly.

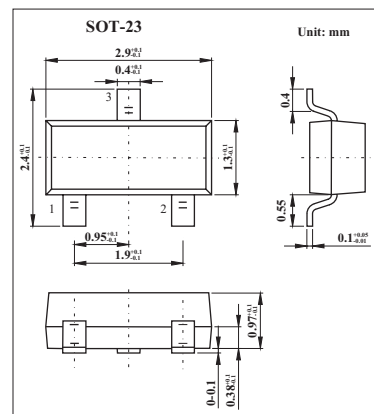

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	V _{RRM}	20	V
Average rectified current	I _O	200	mA
Non-repetitive peak forward surge current	I _{FSM}	3	A
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-55 to + 125	°C

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V _F	I _F = 100 mA			0.40	V
Reverse current	I _R	V _R = 20 V			50	μ A
Thermal resistance	T _{th(j-a)}	Polyimide board		350		°C/W

■ Marking

Marking	S17
---------	-----