


QUARTZ CRYSTAL RESONATOR

石英晶体谐振器



FTX321S



DIMENSIONS (Unit:mm) 外形尺寸

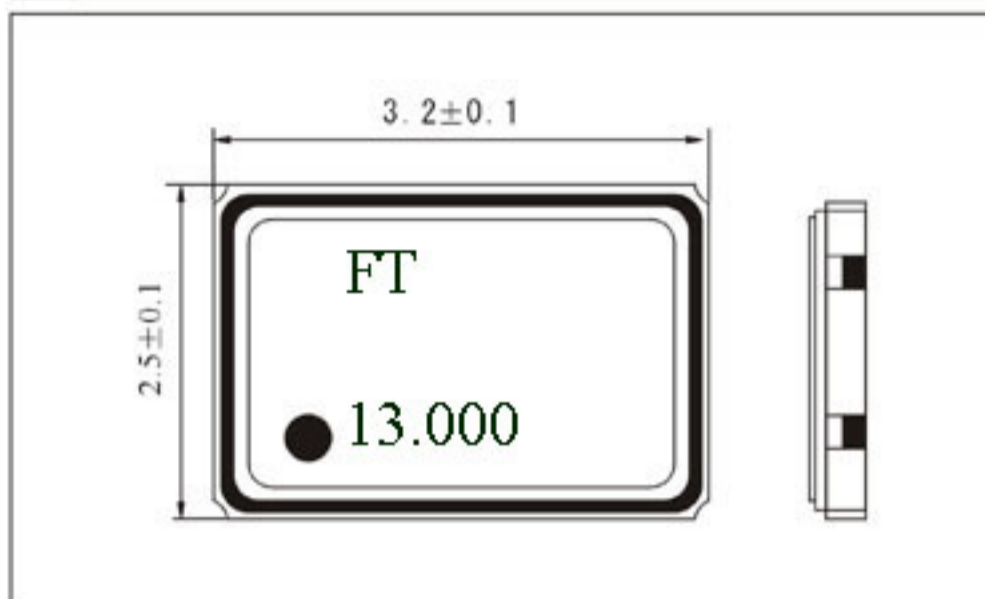

LAND PATTERN LAYOUT (EXAMPLE)

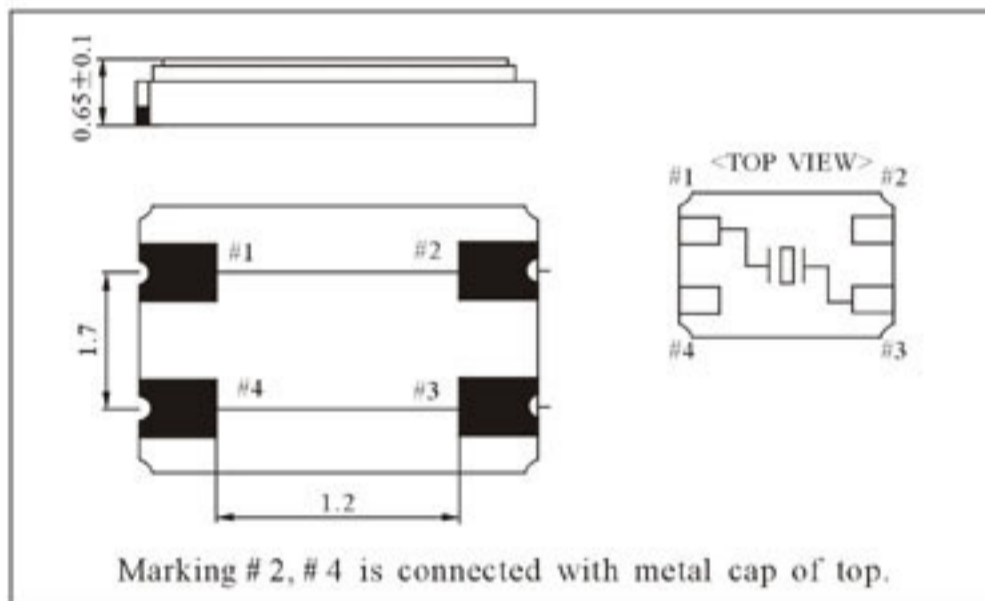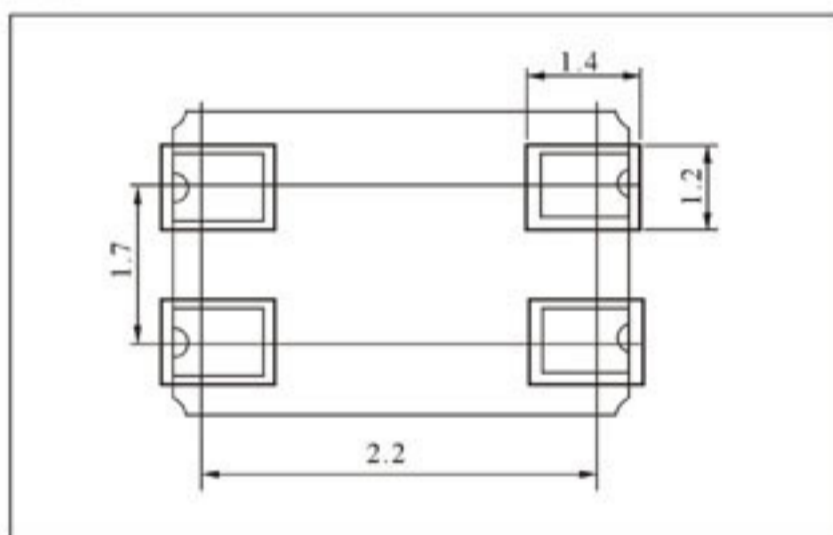

PART NUMBER GUIDE 部件号示例 FTX13.000M9SM3

	Quartz Crystal Resonator 石英晶体谐振器	Frequency 频率	Load Capacitance 负载电容	*Package Type 盒形
FT	X	13.000MHz	9PF	SM3S

PARAMETERS 技术参数

PARAMETERS	参数	SPECIFICATION 规格	
Frequency Range	频率范围	13.000MHz, 16.000MHz	26.000MHz
Operation Mode	振动模式	Fundamental	Fundamental
Load Capacitance	负载电容	9PF	9PF
Drive Level	激励电平	100uW Max	100uw Max
Frequency Tolerance	频率偏差	±10ppm	±10ppm
Motional Resistance	谐振电阻	35ΩMax	40ΩMax
Frequency Stability	频率稳定性	±10ppm	±10ppm
Operating Temp. Range	工作温度范围	-20C ~+75 C	-20 C~+75 C
Storage Temp. Range	储存温度范围	-40°C ~ +85°C	-40°C ~ +85°C

© All specifications subject change without notice. 规格变化, 恕不另行通知