



**Features & Benefits**

- High energy density and voltage
- Long stable power with flat discharge voltage
- Ideal for portable communications, portable computing and robotics


**Specifications**

**Capacity:** 2.9Ah Typical  
 (Charge: CVCC, 4.2V, max. 1925mA, 50mA cutoff, 25°C)  
 (Discharge: CC, 550mA, 2.5V cutoff, 25°C)


**Nominal Voltage:** 3.6V

**Weight:** Approximately 44.5g


**Dimensions**

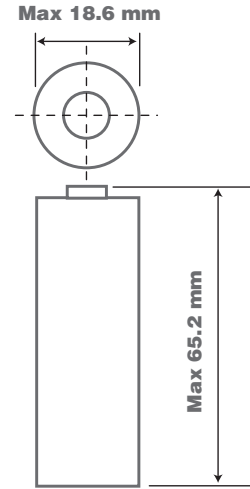


**Charge Characteristics**

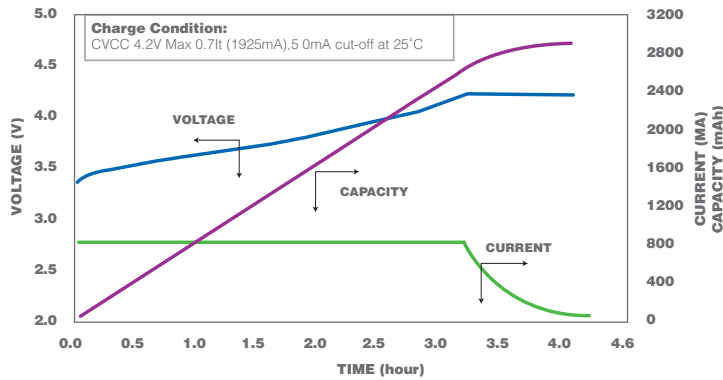


**Discharge Characteristics**

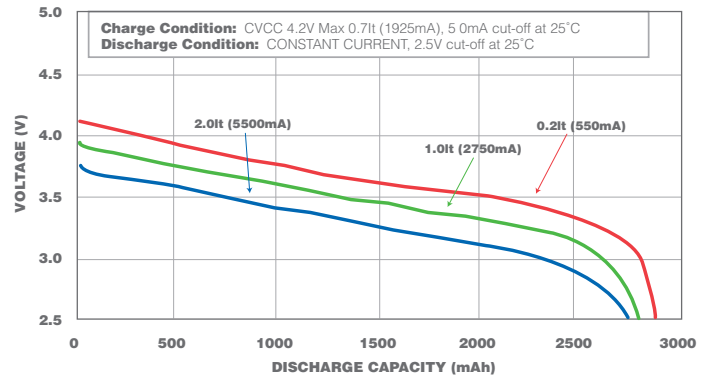

**Discharge Characteristics**

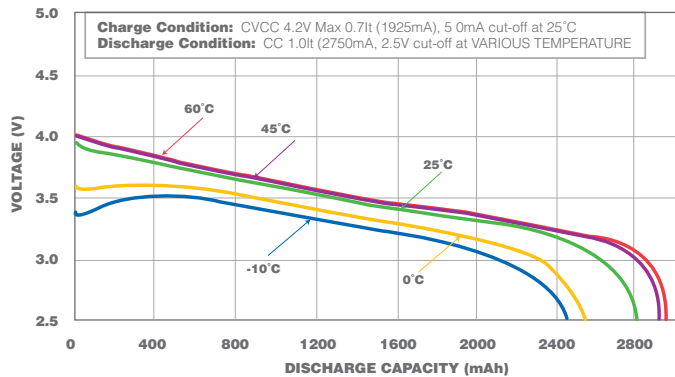

**Cycle Life Characteristics (25°C)**

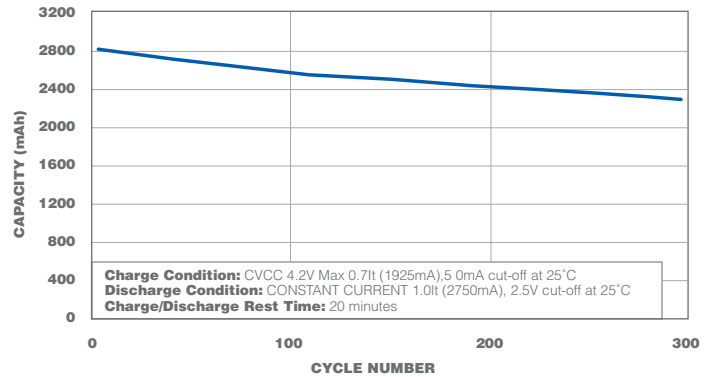

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.