


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES :

1. UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - A. 600 V MAX. VOLTAGE RATING
 - B. 257°F (125°C) MAX. TEMP. RATING
 - C. STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
2. MATERIAL :
 - A. TERMINAL - TIN PLATED COPPER WITH BRAZED SEAM
 - B. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310

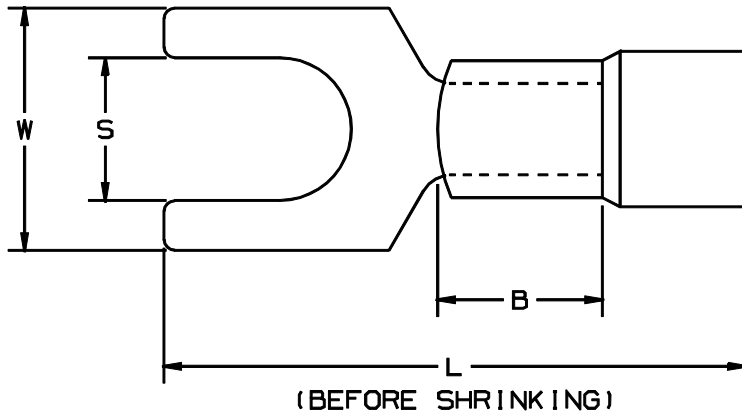

LISTED
587H
E52164



CERTIFIED
73971

PANDUIT PART NUMBER	WIRE RANGE (AWG)	STUD SIZE S	DIMENSIONS			MAX WIRE INSULATION DIA	INSULATION COLOR	STD PKG QTY	BULK PKG QTY
			B	W	L				
PH18-6F	22-18	#6	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-8F	22-18	#8	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-10F	22-18	#10	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH14-6F	16-14	#6	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-8F	16-14	#8	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-10F	16-14	#10	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH10-8F	12-10	#8	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200
PH10-10F	12-10	#10	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200

A41455_01

PANDUIT CORP.

TINLEY PARK, ILLINOIS

01 1/01 RM

FILESPEC WAS NPC-A41455-00

00 2/90 DL

RELEASED

HEAT SHRINK INSULATED
FORK TERMINALS

REV DATE BY CHK

DESCRIPTION

QA CUST PM APP

DRAWN BY
DRL

CHK'D

SCALE

NONE

DRAWING NO.

A41455