





SIDE VIEW

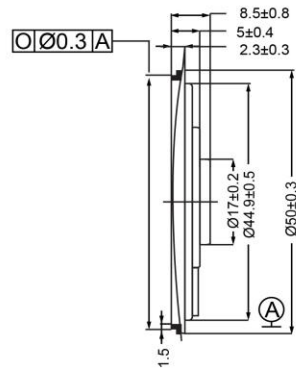

BOTTOM VIEW



Specifications			Notes	Revision History													
Description	Value	Unit		Version	Description	Date	Approved										
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS 	1	Released from Engineering	10/21/2013	J.S										
Resonant Frequency	380	(Hz)															
Frequency Range	380 ~ 5,000	(Hz)															
SPL @ 10cm	93	(dBA)															
Impedance	8	(Ohm)															
Cone Material	Paper																
Nominal Power	0.25	(W)															
Max Power	0.5	(W)															
Mount Type	Flush																
Operating Temperature	-40 ~ +66	°C															
Storage Temperature	-40 ~ +66	°C															
Weight	24	(g)															
						Drawn by A.B.		Date 10/21/2013		Checked by C.E.		Date 10/21/2013		Approved by J.S		Date 10/21/2013	
				Dynamic Speaker				SP500308-2									