

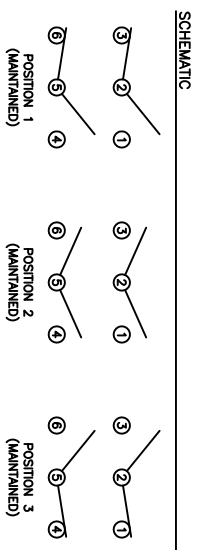


SUGGESTED PANEL CUTOUT

MATERIALS
 BODY: Polyamide 6/6 (PA66), UL94 V-2
 ACTUATOR: Polyamide 6/6 (PA66), UL94 V-2
 SEALING MEMBRANE: Polyvinyl Chloride (PVC)
 SPRING: Phoro wire
 MOBILE CONTACT BAR: Copper
 CONTACT PADS: Silver Clad Copper
 RIFETS: Copper
 TERMINALS: Brass

SPECIFICATIONS
 FUNCTION: 2P2T ON-OFF-ON
 RATINGS: IACS/UL 508 and CAN/CSA 222.2 No.14 (E198908): 20A 125VAC [cUlrua]
 15A 277VAC [cUlrua]
 2HP 110/250VAC [cUlrua]
 CONTACT RESISTANCE: Initial: 50mΩ Max.
 ELECTRICAL LIFE: 6,000 Cycles [cUlrua]
 TEMPERATURE: Operating: -20°C to 55°C [cUlrua]
 INGRESS PROTECTION: IP54
 APPROVALS: COMPLIANT

COLORS AND MARKINGS
 BODY COLOR: Black
 ACTUATOR COLOR: Black
 MARKING: None
 MARKING COLOR: None

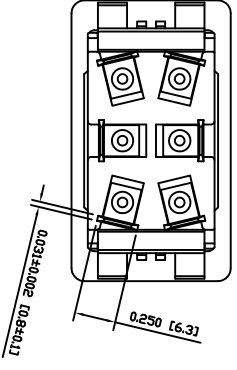

RWW46D1100

DATE: DECEMBER 9, 2009

ACTUATOR	B	10/09/28	CAB
BODY	A <td>09/06/15 <th>CAB</th> </td>	09/06/15 <th>CAB</th>	CAB
COLORS	A <td>10/03/07 <th>CAB</th> </td>	10/03/07 <th>CAB</th>	CAB
MATERIALS	C <td>10/03/07 <th>CAB</th> </td>	10/03/07 <th>CAB</th>	CAB
SPECIFICATIONS	C <td>10/03/07 <th>CAB</th> </td>	10/03/07 <th>CAB</th>	CAB
REFERENCE	REV. <td>DATE</td> <td>BY</td>	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

CONNECTED SPECIFICATIONS	INITIAL RELEASE	DESCRIPTION
PCB02027	109/12/09	CAB
PCB02051	09/08/05	CAB
PCB	DATE	DRAWN BY

DIMENSIONS
 INCHES [MILLIMETERS]
 GENERAL TOLERANCES ±0.008 [±0.2] / ±1'
 SCALE DRAWING NOT TO SCALE

PROJECTION DRAWING NUMBER	DATE	REVISION
34-RWW46D1100	DECEMBER 9, 2009	B