

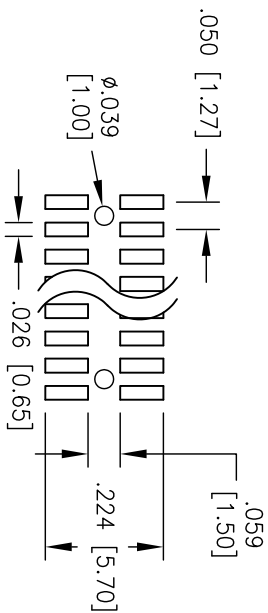
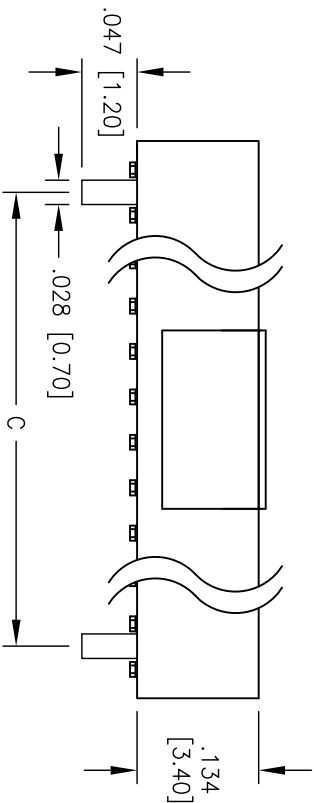


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/17/09	

APPROVED: _____ TITLE: _____
 DATE: _____

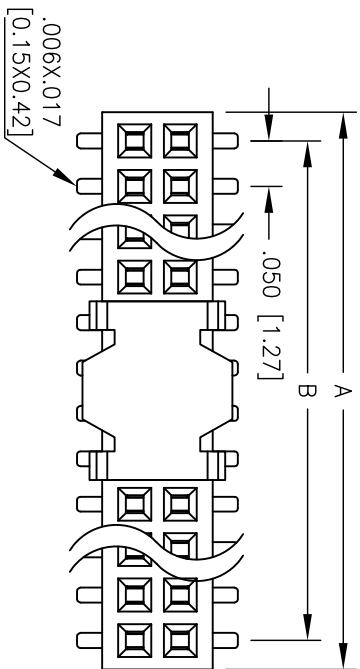

Recommended PCB Layout

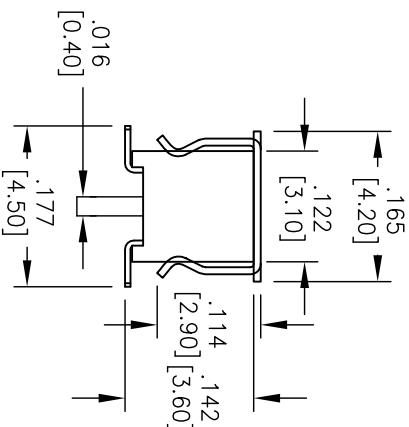

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate overall.

Electrical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



A = .050 [1.27] X No. of Positions + .014 [0.35]
 B = .050 [1.27] X No. of Spacers
 C = .050 [1.27] X No. of Spaces - .050 [1.27]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS

DATE	DATE
	12/17/09

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .134" INSULATOR HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-G-SMT-P-PP	-

DRAWN	BY	DATE
	DY	12/17/09

CHECKED	DATE

APPROVED	DATE

REF: S00022T SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1