


# Ceramic Bandpass Filter IFD21651

## Features

- Ceramic bandpass filter
- 50Ω single-ended operation
- Surface Mounted Module Package ( 10.7mm × 9.3mm × 3.9mm )


## Package Dimensions

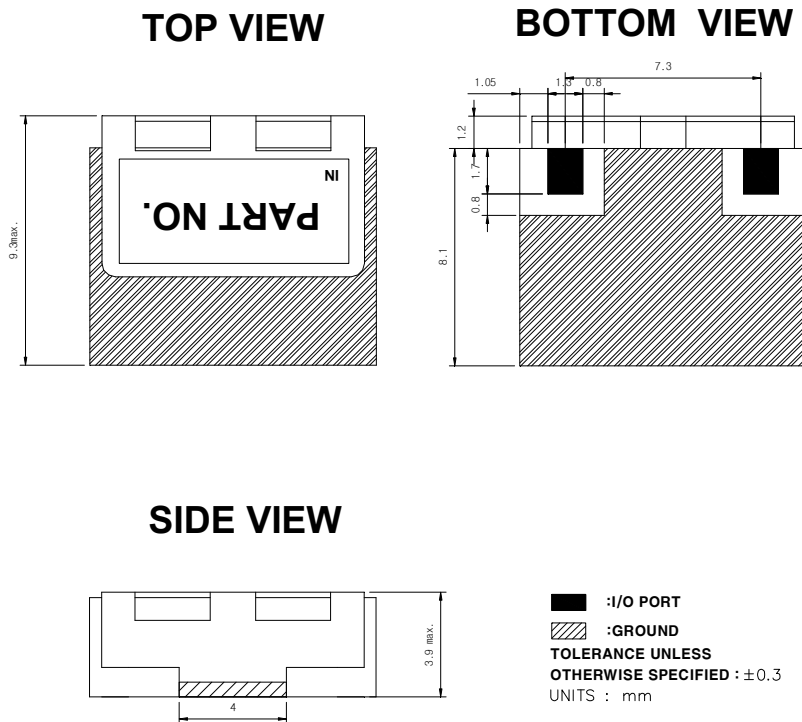

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-45	25	85
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	Watt	-	-	3

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD21651	
		Rev. Date	2014-09-04	
		Rev.	AS 01	1/3

# Ceramic Bandpass Filter IFD21651


## Specifications

Fo = 2160MHz

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fo )	-	2160	-	MHz
Insertion Loss (2150 ~ 2170MHz)	-	2.5	3.0	dB
Amplitude Ripple (2150 ~ 2170MHz)	-	0.3	0.5	dB
Return Loss (2150 ~ 2170MHz)	18	20	-	dB
Relative Attenuation @ 2102.5 MHz	50.0	55.0	-	dB
Input/Output Impedance		50		Ohm

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD21651	
		Rev. Date	2014-09-04	
		Rev.	AS 01	2/3

# Ceramic Bandpass Filter IFD21651

## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )




## Marking Configuration

Part No. <sup>1)</sup>

1) Part Number

\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD21651	
		Rev. Date	2014-09-04	
		Rev.	AS 01	3/3