



397 Route 281 – P.O. Box 1175
 Tully, New York 13159-1175
 Phone: 315 696-6676
 Fax: 315 696 9923
 Email: sales@acipower.com
 www.acipower.com

ACR-0851-1672

PRODUCT DATA SHEET – PAGE 1 OF 2

9.0" SINGLE BANK LED RAIL

(Single Bank, 85V @ 100mA)

5/1/08

GENERAL DESCRIPTION


The ACR-0851-1672 is designed as a replacement for field replaceable, dual tube, single edge lit 10.4" CCFL displays. The rail utilizes protection circuits to ensure the whole rail will not fail in the unlikely event of an individual LED failure.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with both the I-Drive2 and I-Drive3 LED driver platforms.

MECHANICAL / ENVIRONMENTAL

- Weight = TBD grams
- Altitude = 35,000 Ft maximum
- Humidity < 95% non-condensing
- Size (L x W x H) = 9.0 IN x 0.240 IN x 0.128 IN
- PCB thickness = 0.030 IN
- Input connector = CON1
- RoHS compliant

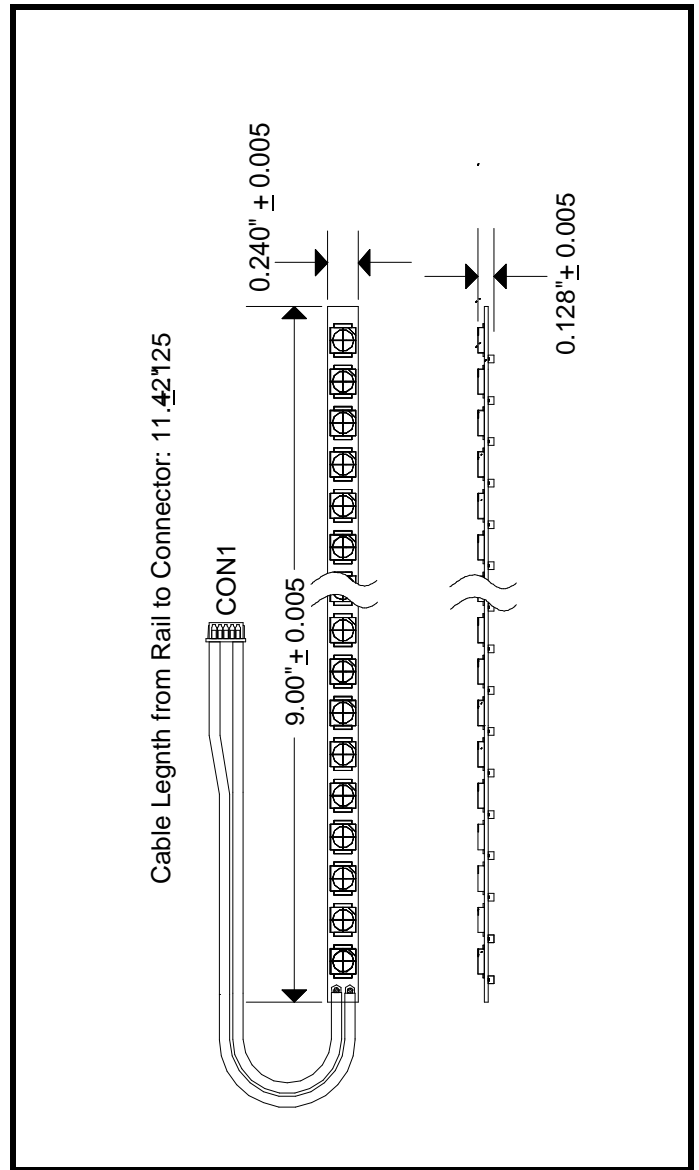

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 2

MAXIMUM RATINGS

5/1/08

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-20 to +75	Deg-C
Tstg	LED Rail storage temperature	-40 to +105	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	125	Ma

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 350 mA	50	55	60	Lm
X	White X coordinate			0.303		-
Y	White Y coordinate			0.296		-

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 100mA, Tled = +75Deg-C (LED's without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		77	85	94	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

