

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [36757-0026](#)  
**Status:** **Active**  
**Overview:** MLX™ Power Connectors  
**Description:** 6.35mm Pitch MLX™ Power Connector Header, Pin Terminals, 2.13mm Contact Diameter, Vertical, with Plastic Polarizing Peg, 12 Circuits, Lead-Free, White, Glow Wire Compliant

**Documents:**

[3D Model](#) [Product Specification PSX-42002-0001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179


**General**

Product Family PCB Headers  
 Series [43255](#)  
 Application Board-to-Board, Power, Wire-to-Board  
 Comments "High Vibration Application<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options."

Overview [MLX™ Power Connectors](#)  
 Product Name MLX™  
 UPC 884982501966

**Physical**

Breakaway No  
 Circuits (Loaded) 12  
 Circuits (maximum) 12  
 Color - Resin White  
 Durability (mating cycles max) 50  
 First Mate / Last Break No  
 Flammability 94V-2  
 Glow-Wire Compliant Yes  
 Keying to Mating Part Yes  
 Lock to Mating Part Yes  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin

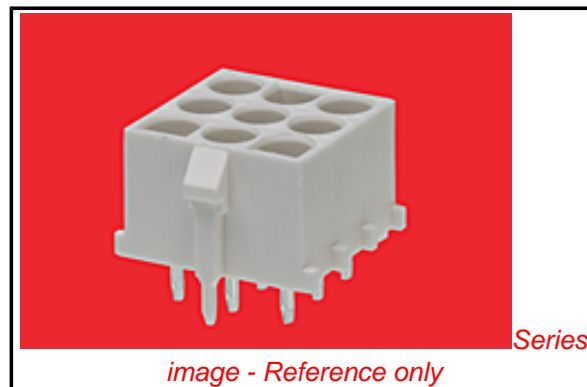

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Not Reviewed**  
**Low-Halogen Status Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[43255Series](#)

**Mates With**

[42021 MLX™ Power Crimp Housing Plug](#),  
[42023 MLX Crimp Terminal](#), [42024 MLX Crimp Terminal](#)

|                                |                 |
|--------------------------------|-----------------|
| Material - Resin               | Polyester       |
| Number of Rows                 | 4               |
| Orientation                    | Vertical        |
| PC Tail Length                 | 4.30mm          |
| PCB Locator                    | Yes             |
| PCB Retention                  | Yes             |
| PCB Thickness - Recommended    | 1.60mm          |
| Packaging Type                 | Tray            |
| Pitch - Mating Interface       | 6.35mm          |
| Pitch - Termination Interface  | 6.35mm          |
| Polarized to Mating Part       | Yes             |
| Polarized to PCB               | Yes             |
| Shrouded                       | Fully           |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -55°C to +105°C |
| Termination Interface: Style   | Through Hole    |

### **Electrical**

|                               |         |
|-------------------------------|---------|
| Current - Maximum per Contact | 20A, 9A |
| Voltage - Maximum             | 600V    |

### **Material Info**

### **Reference - Drawing Numbers**

|                       |                |
|-----------------------|----------------|
| Product Specification | PSX-42002-0001 |
| Sales Drawing         | SDA-43255-00** |

This document was generated on 09/25/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**