

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [98273-1006](#)
Status: **Active**
Overview: NSCC - New Standard Casing Contact
Description: 3.33mm / 6.00mm Pitch Hybrid Inline Female Housing, Right Slide Orientation, Dual Row, 16 Circuits, Gray

Documents:

[3D Model](#) [Packaging Specification PK-98273-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Application Specification AS-98273-001 \(PDF\)](#)

General

Product Family	Crimp Housings
Series	98273
Application	Power, Wire-to-Wire
Comments	7 Amps max @85°C for NSCC terminal 98897 with 2.00 mm ² wire or 15 Amps max @85°C for UCC terminal 98898 with 4.00 mm ² wire
Overview	NSCC - New Standard Casing Contact
Product Name	NSCC
UPC	822348213177

Physical

Circuits (maximum)	16
Circuits Detail	4x2.8mm 12x1.5mm female terminals
Color - Resin	Natural, Natural (White)
Gender	Female
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Resin	Polyester, Polyester Alloy
Net Weight	17.591/g
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	3.33mm, 6.00mm
Polarized to Mating Part	Yes
Ports	1
Stackable	No
Temperature Range - Operating	-40°C to +85°C


Electrical

Current - Maximum per Contact	15A, 7A
-------------------------------	---------

Material Info

Reference - Drawing Numbers

Application Specification	AS-98273-001
Packaging Specification	PK-98273-001
Sales Drawing	SD-98273-001, SD-98273-002

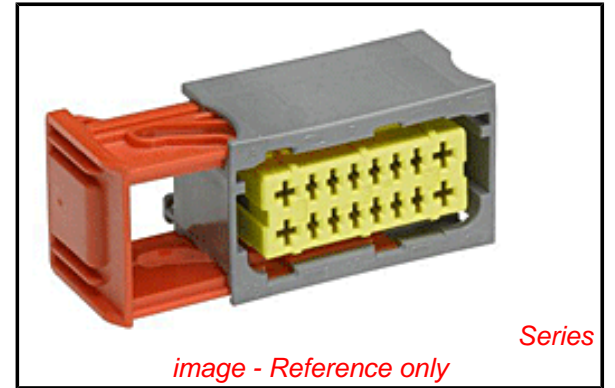

EU RoHS

ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[98273Series](#)

Mates With

[98276-1006](#)

Use With

[98897](#) NSCC Terminals, [98898](#) UCC2 Terminals