


DETAILS

Product Number	CS14144_STRADA-IP-2X6-ME
Family	Strada
Type	Assembly
Color	white
Diameter	71,4x173 mm
Height	8,42 mm
Style	rectang
Optic Material	
Holder Material	
Fastening	
Status	production ready
ROHS Compliant	Yes
Date Updated	24/05/2017




OPTICAL PROPERTIES

LED	Viewing	Light	Efficiency	cd/lm	Connector
	Angle	Beam			
SMD 5050	Asymmetric deg	Asymmetric	94 %	0.560	-
XT-E	asymmetric deg	Asymmetric	93 %	0.823	-
XP-L	asymmetric deg	Asymmetric	94 %	0.620	-
XHP35 HD	sim: Asymmetric	Asymmetric	sim: 88 %	sim: 0.530	-
XHP35 HI	sim: Asymmetric	Asymmetric	sim: 90 %	sim: 0.540	-
XP-G2	asymmetric deg	Asymmetric	94 %	0.820	-
XP-G3	sim: Asymmetric	Asymmetric	sim: 88 %	sim: 0.550	-
XP-L2	Asymmetric deg	Asymmetric	94 %	0.580	-
H35C1 (LEMWA33)	Asymmetric deg	Asymmetric	94 %	0.670	-
LUXEON T	Asymmetric deg	Asymmetric	96 %	-	-
LUXEON XR-TX (L2T0-xyy012M)	Asymmetric deg	Asymmetric	94 %	0.850	-
NVSxx19B/NVSxx19C	Asymmetric deg	Asymmetric	96 %	0.800	-
Duris S8	sim: Asymmetric	Asymmetric	sim: 90 %	sim: 0.580	-
Duris P8	sim: Asymmetric	Asymmetric	sim: 90 %	sim: 0.640	-
Fortimo FastFlex LED board 2x6 DP G4	Asymmetric deg	Asymmetric	94 %	0.820	-
Fortimo FastFlex LED board 2x6 DPX G4	sim: Asymmetric	Asymmetric	sim: 88 %	sim: 0.550	-
Acrich MJT 4040	sim: Asymmetric	Asymmetric	-	-	-
Z5M1/Z5M2	sim: Asymmetric	Asymmetric	sim: 90 %	sim: 0.840	-
Z8Y22P	Asymmetric deg	Asymmetric	94 %	0.730	-
TL1L3	sim: Asymmetric	Asymmetric	sim: 95 %	-	-
TL1L2	sim: Asymmetric	Asymmetric	sim: 88 %	-	-
TL1L4	Asymmetric deg	Asymmetric	92 %	0.750	-

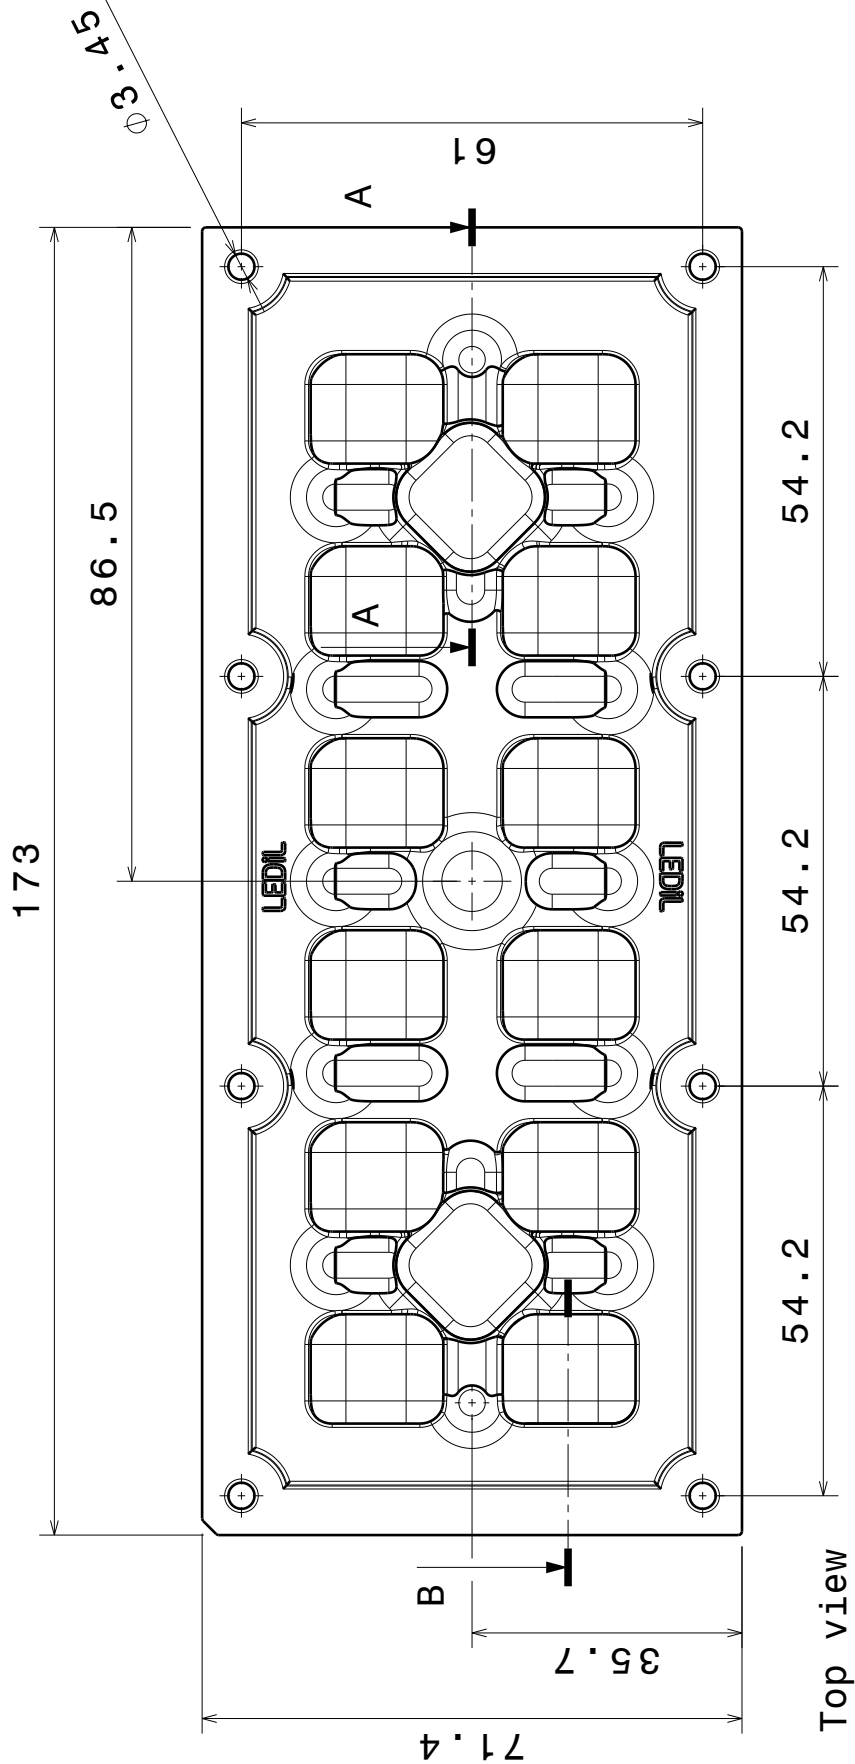


Top view

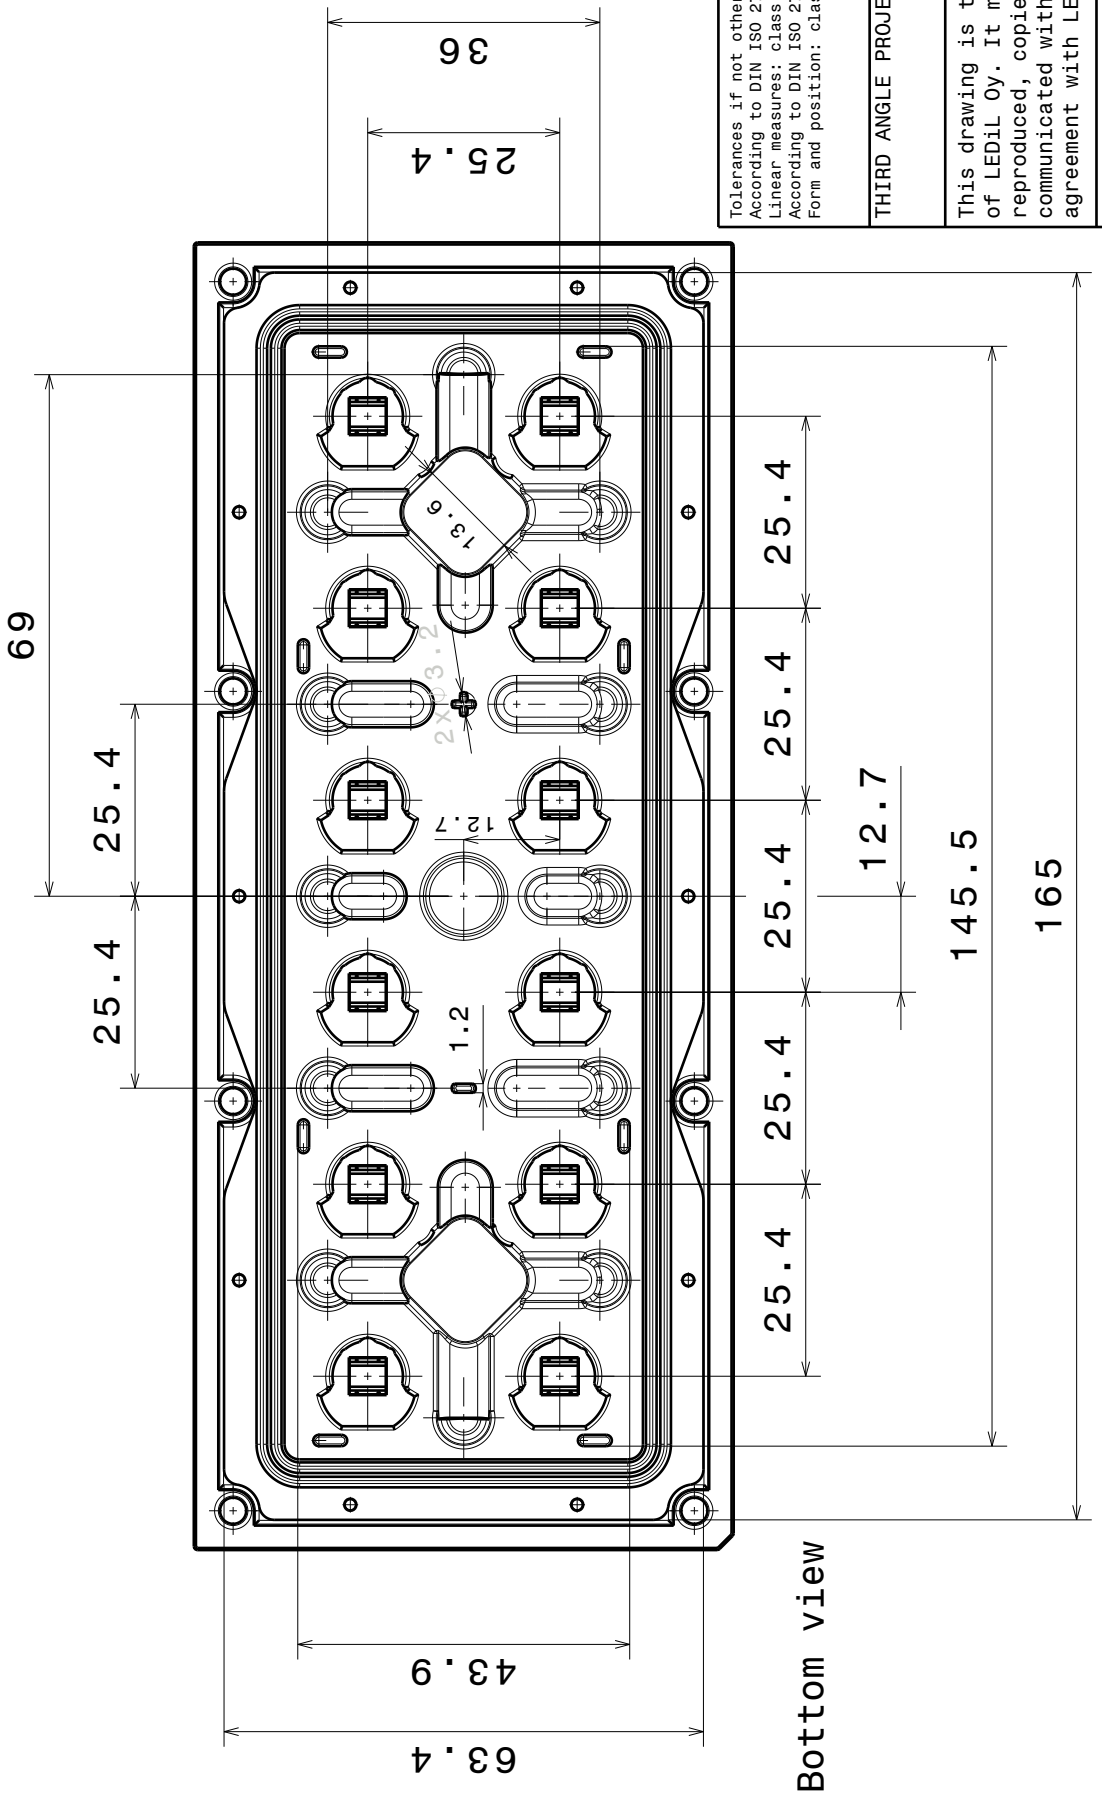


Bottom view

Section view B-B
Scale: 2:1

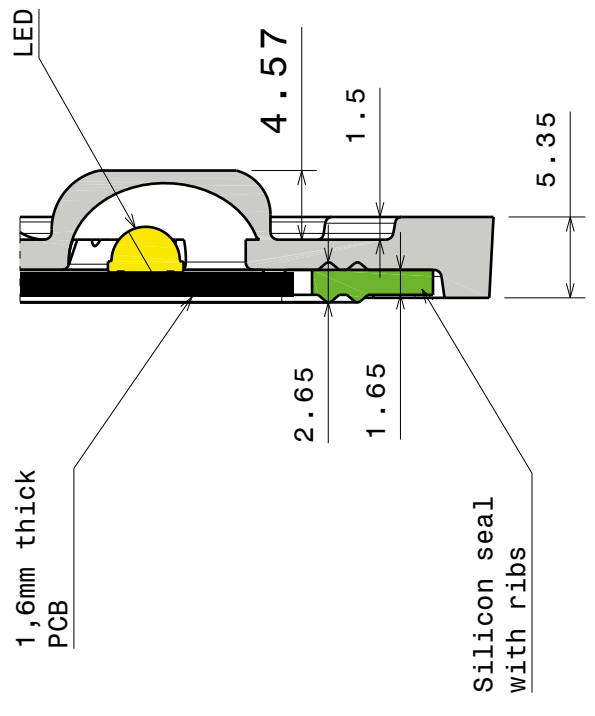

Section view A-A

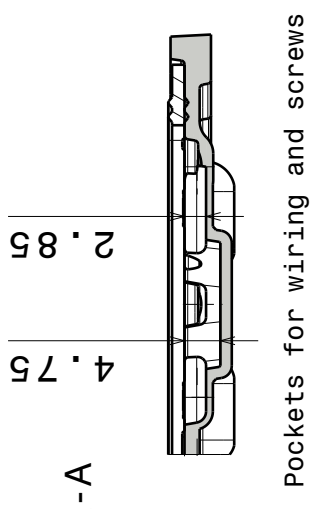

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14018	2X6-SEAL25	Silicone	white
2	C13355	STRADA-IP-2X6-ME	PMMA	clear


LEDIL
LediL Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE		CS14144_STRADA-IP-2X6-ME	
SIZE	PART NUMBER	SCALE	WEIGHT
A3	CS14144	1:1	53,58 g
THIRD ANGLE PROJECTION:		SHEET	1/2


This drawing is the property of LEDIL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDIL Oy.

Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(Bridgelux_5050_Gen2)

Lamps: 1 x Bridgelux_5050_Gen2_2x6_(BXEP-57C-435-09B)_4268.87lm@250mA_CCT=5700K_P=24.6757W_I=0.25A

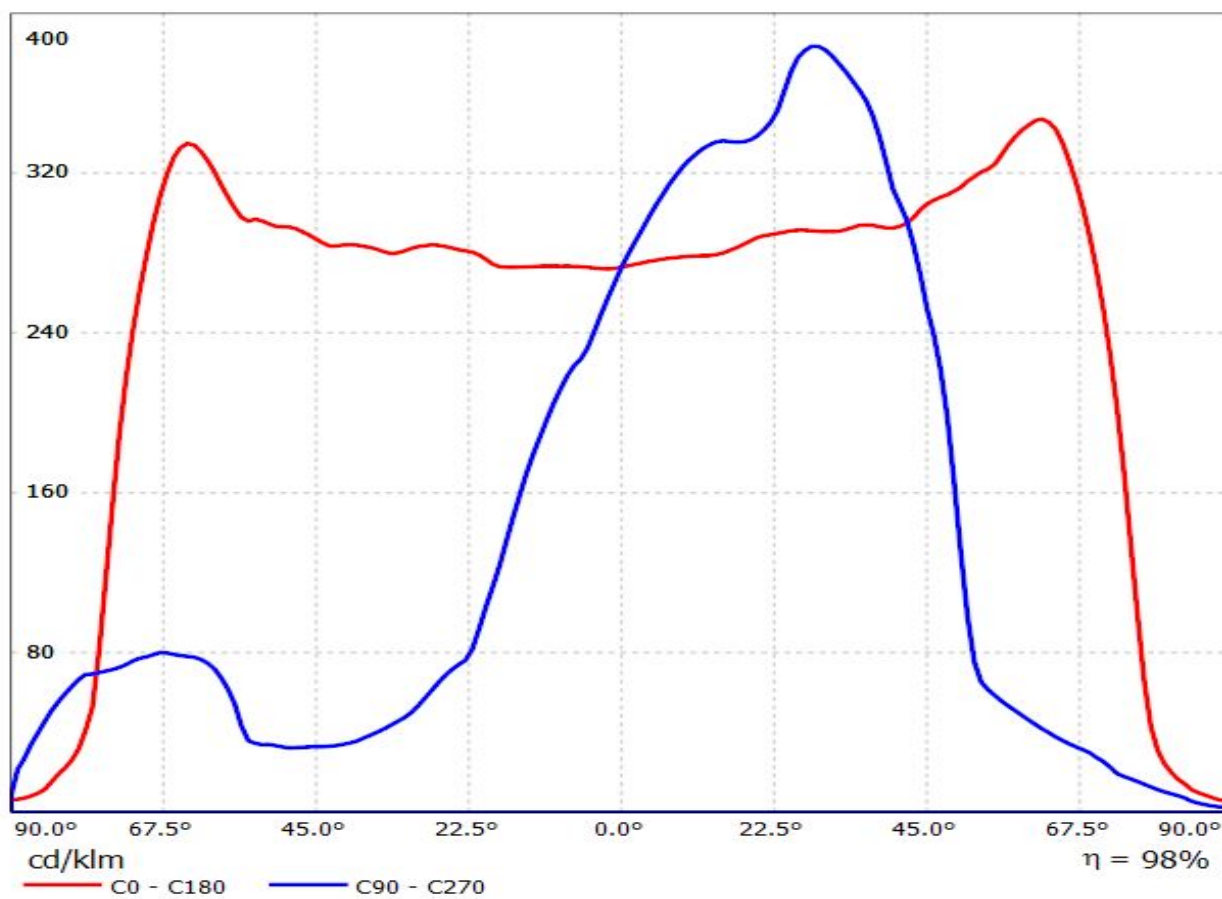


Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XT-E)_02 Eff.92.8%
Lamps: 1 x CREE_XT-E_6x2_(XTEAWT-00-0000-000000HE4)_1253.02lm@250mA_P=8.85391W_I=249.8mA

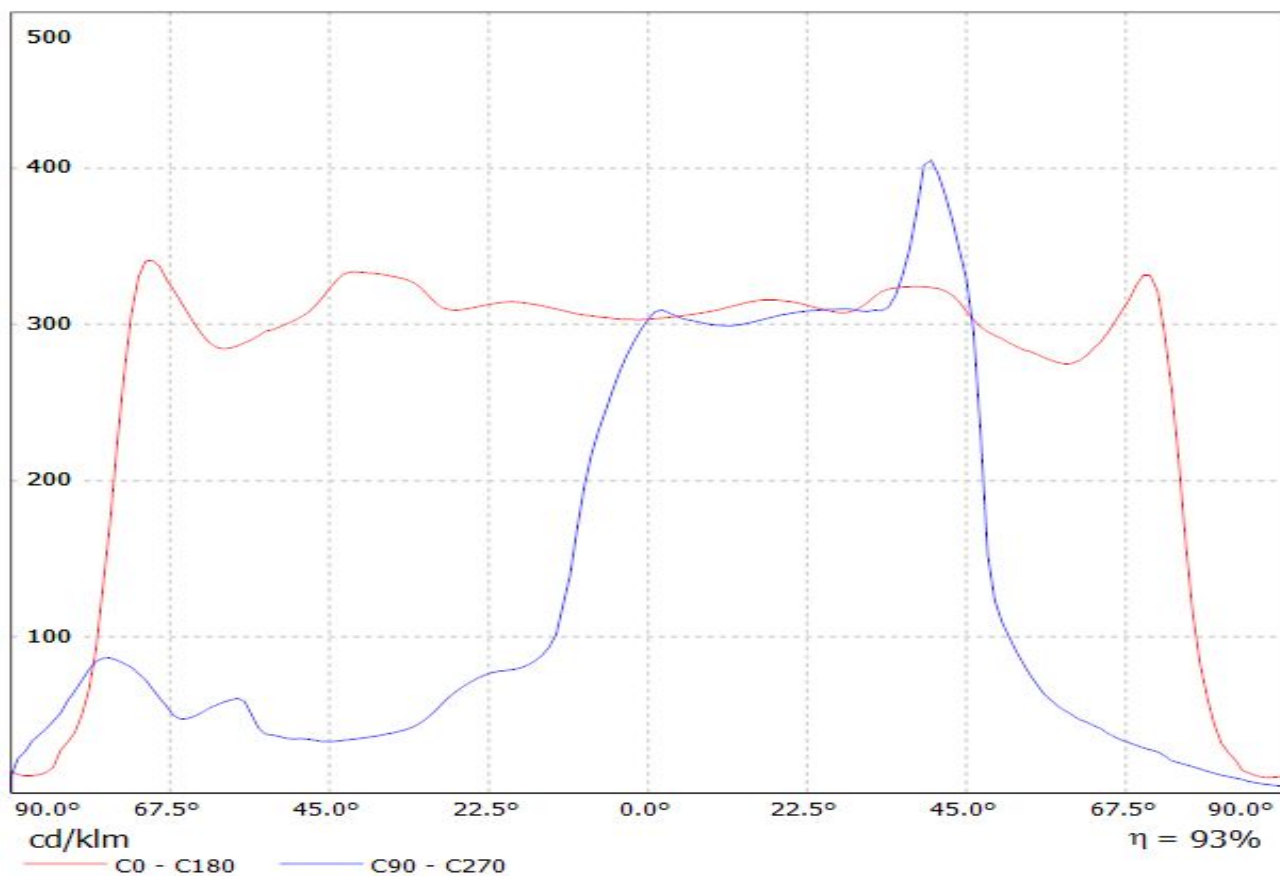


Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XP-L)


Lamps: 1 x CREE_XP-L_2x6_(XPLAWT-0-7A3-U50-0H-0001)_1253.88lm@250mA_P=8.22317W_I=249.8mA

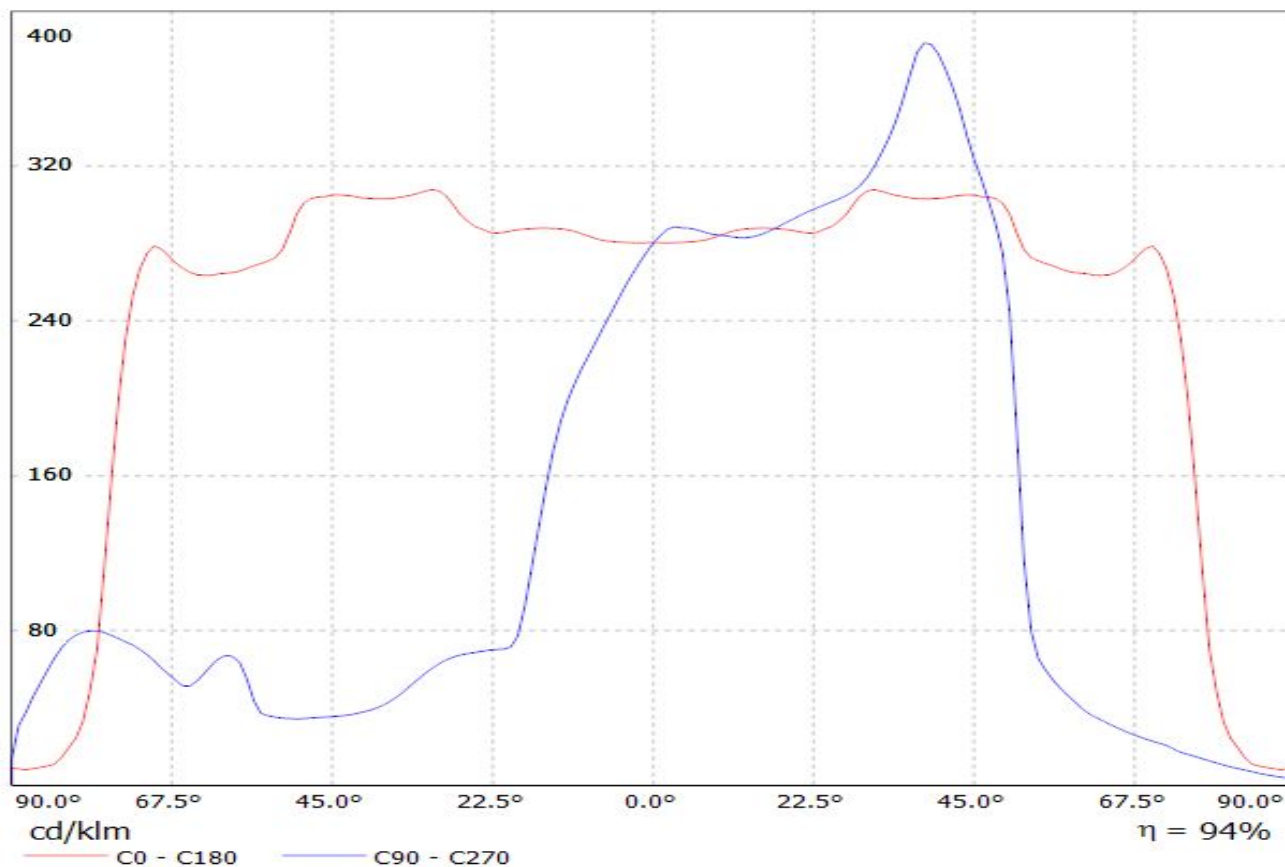


Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XP-G2)
Lamps: 1 x XP-G2_2x6_1246.35lm@250mA_U=8.54391W_I=249.8mA

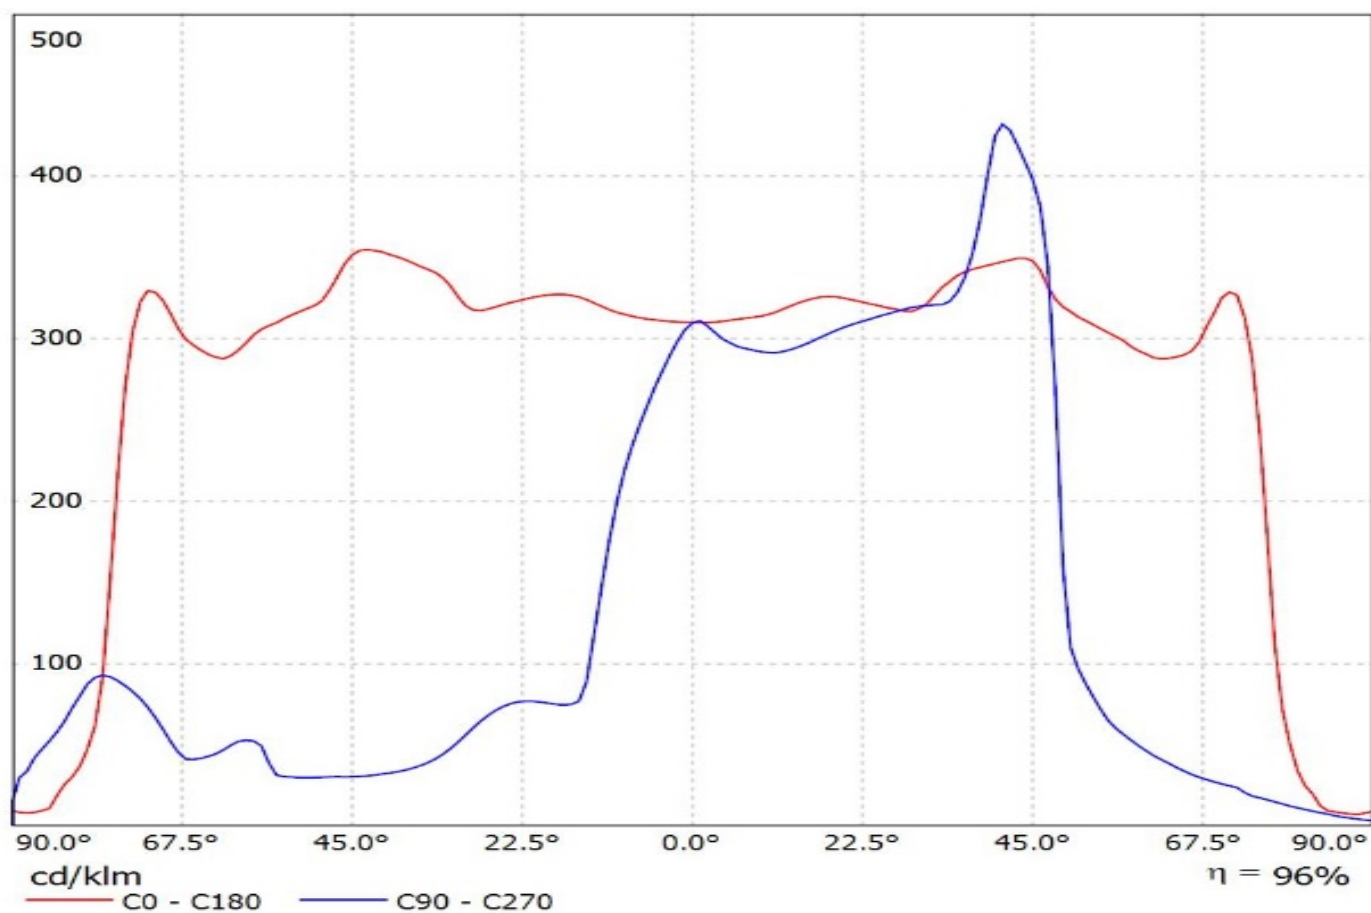

Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

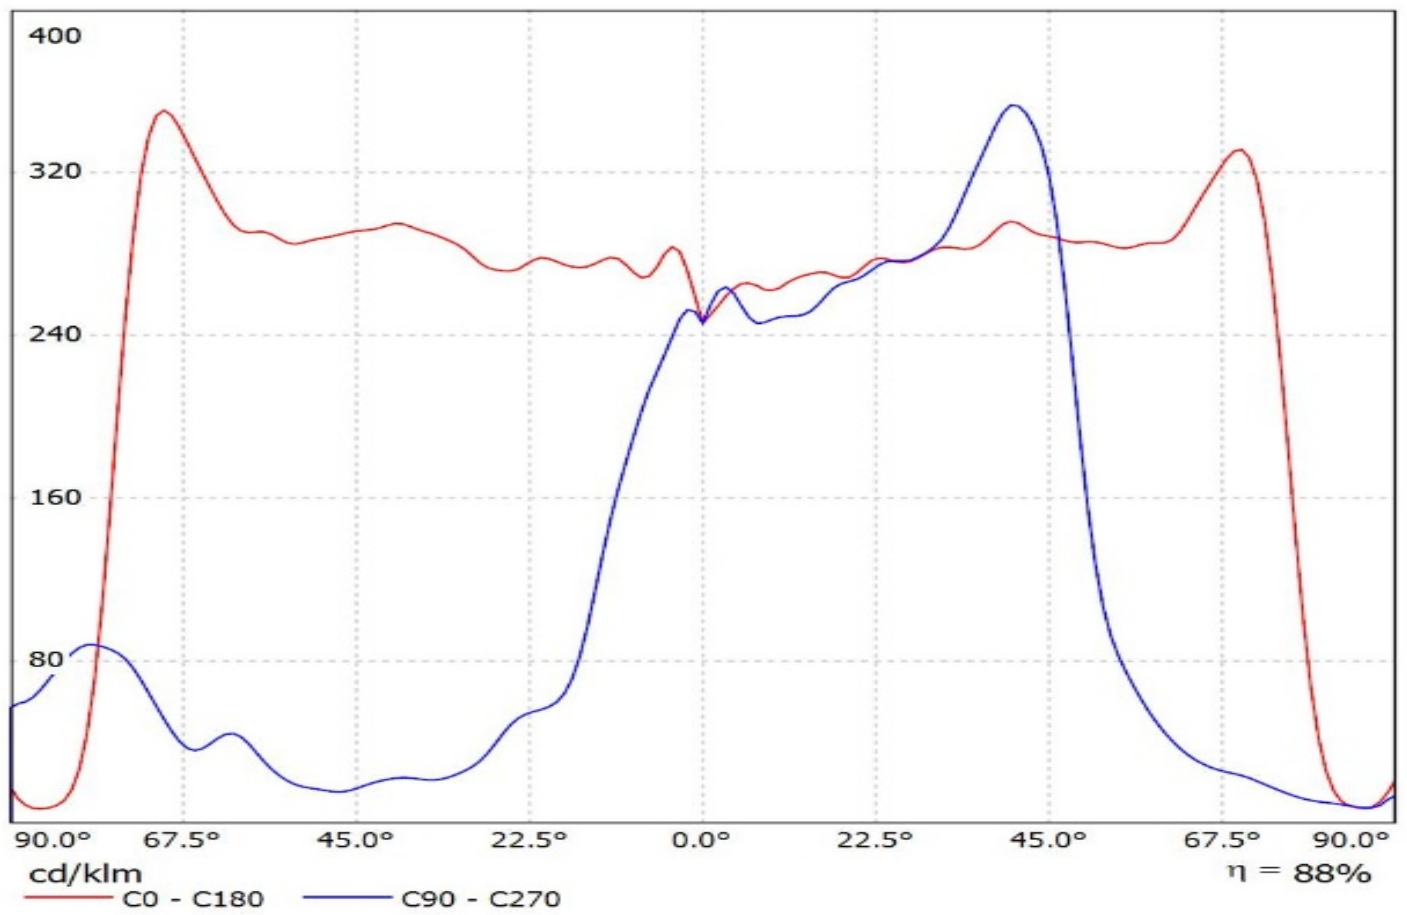


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(XP-L2)
Lamps: 1 x Cree_XP-L2x12_(XPGBWT-H1-3B0-R5-0-01)
1666.32lm@250mA_CCT=5000_P=8.239W_I=0.25A

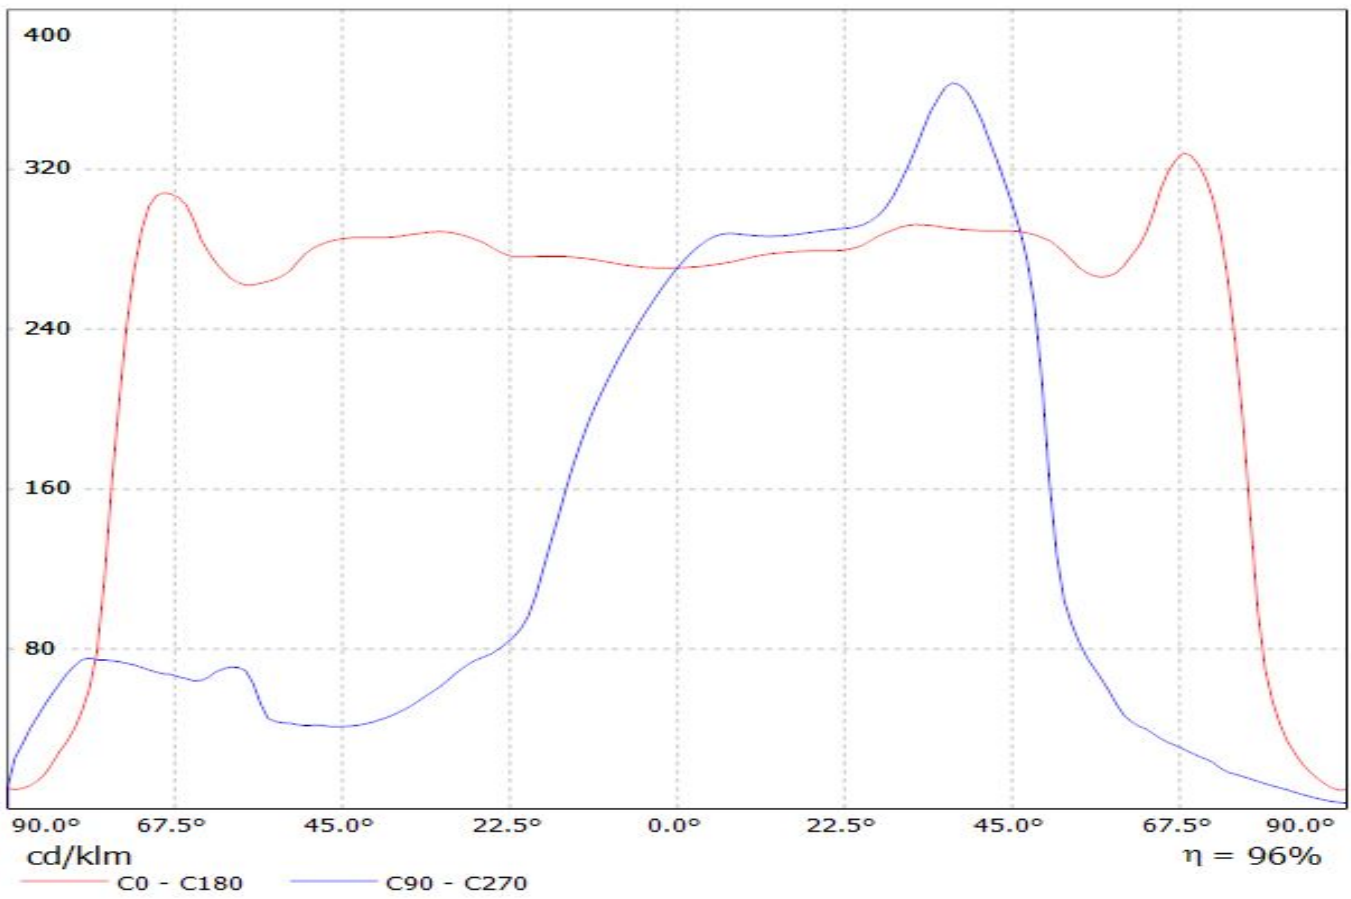


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(H35C1)


Lamps: 1 x LG_H35C1_2x6_1389.53lm@250mA_CCT=5700_P=8.59425W_I=0.250A

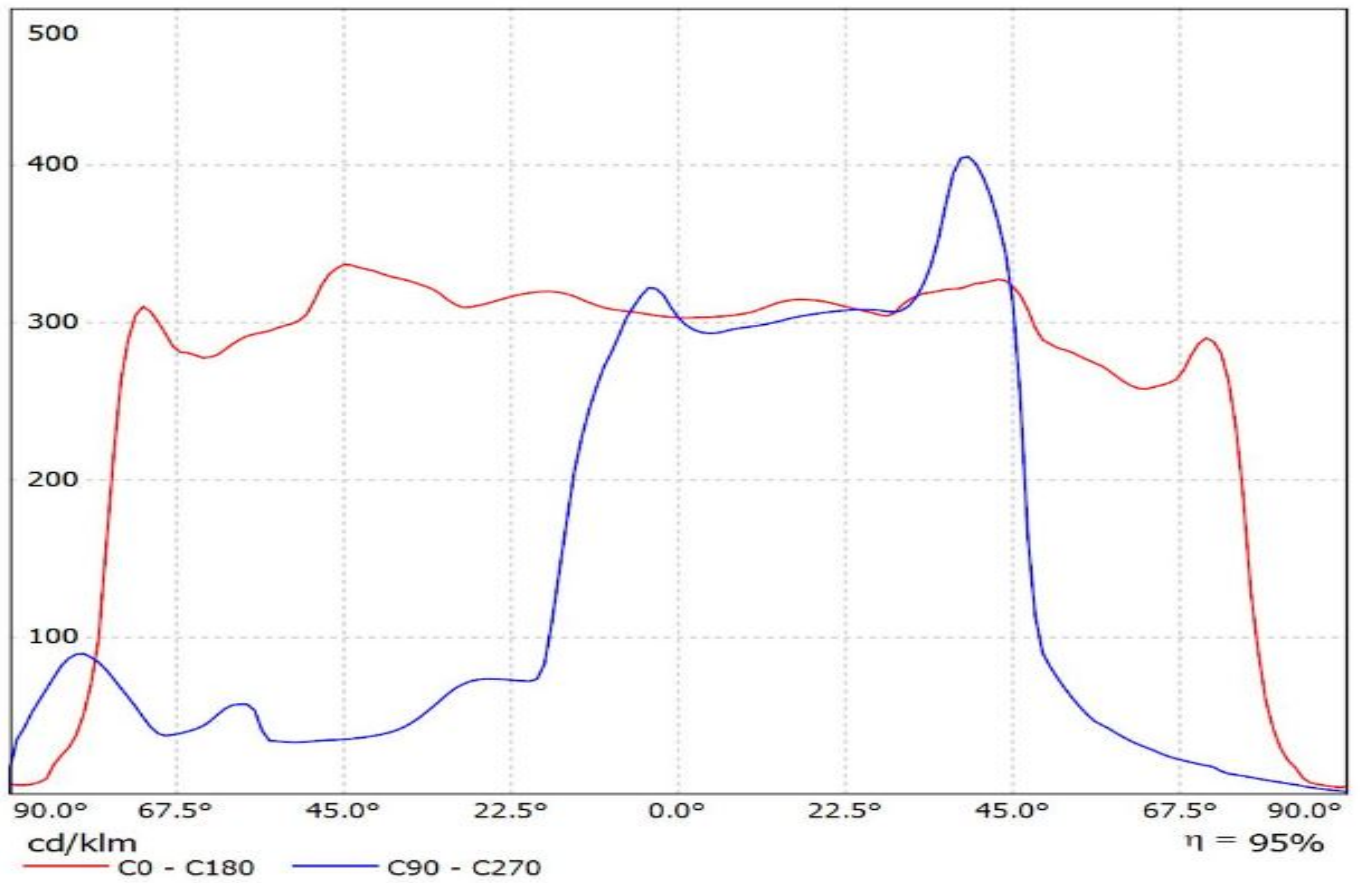


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(XR-TX)
Lamps: 1 x Luxeon_XR-TX_1377.67lm@250mA_P=8.3973W_I=0.250A

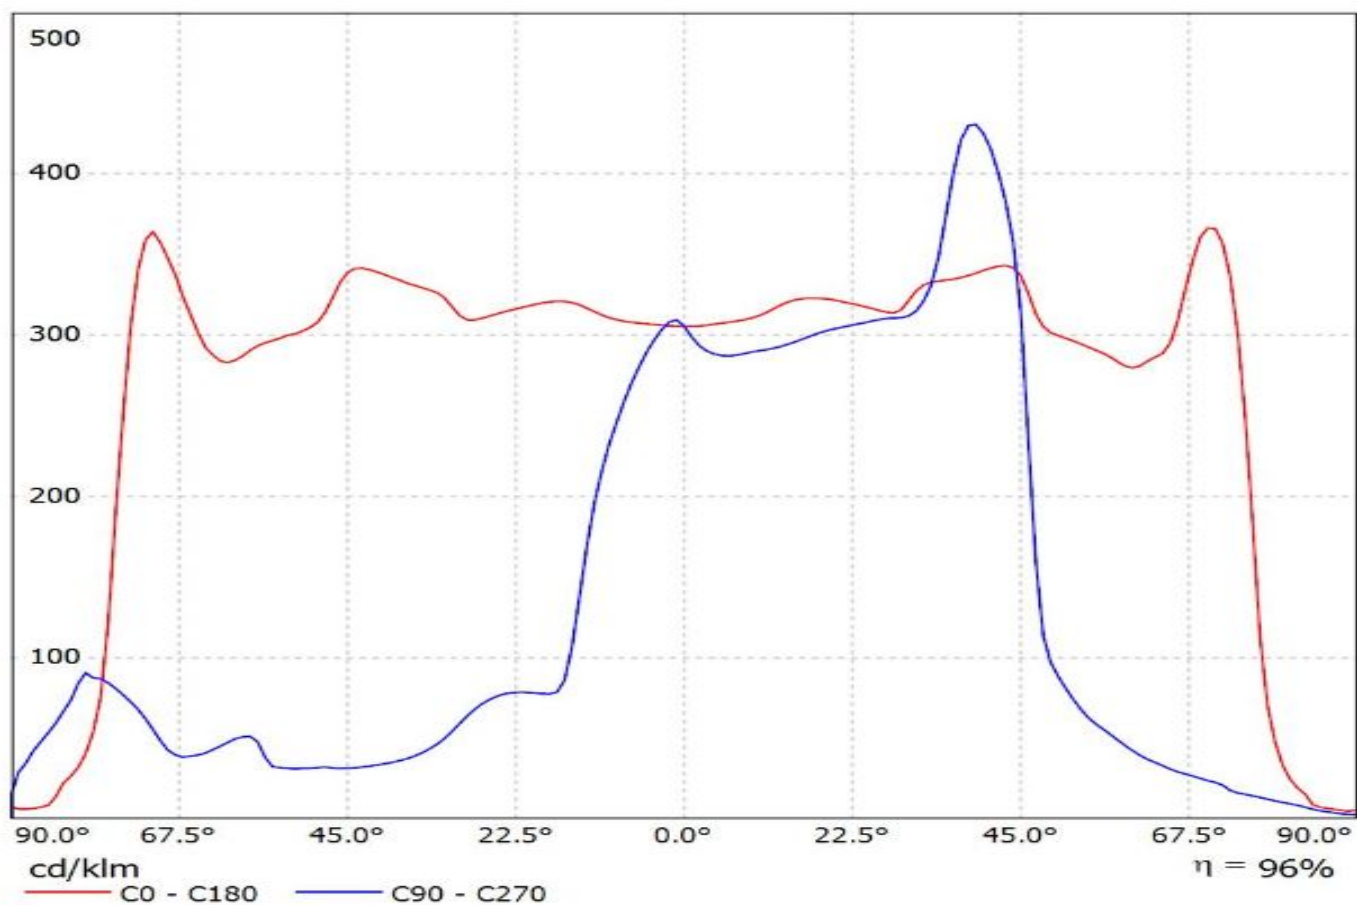


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(NVSL219CT)
Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

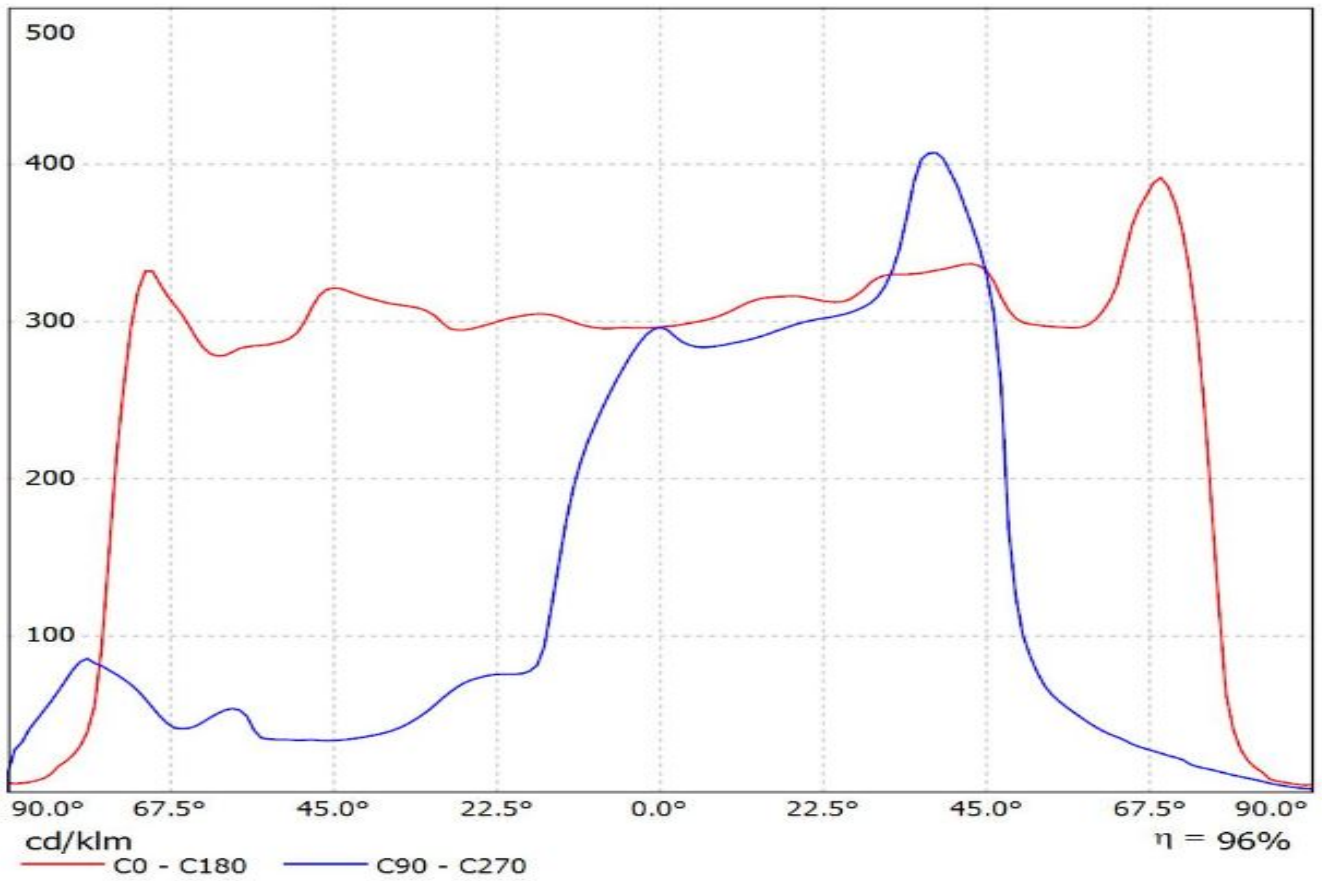


Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(Duris_P8)_SIMULATED
Lamps: 1 x Osram Duris P8

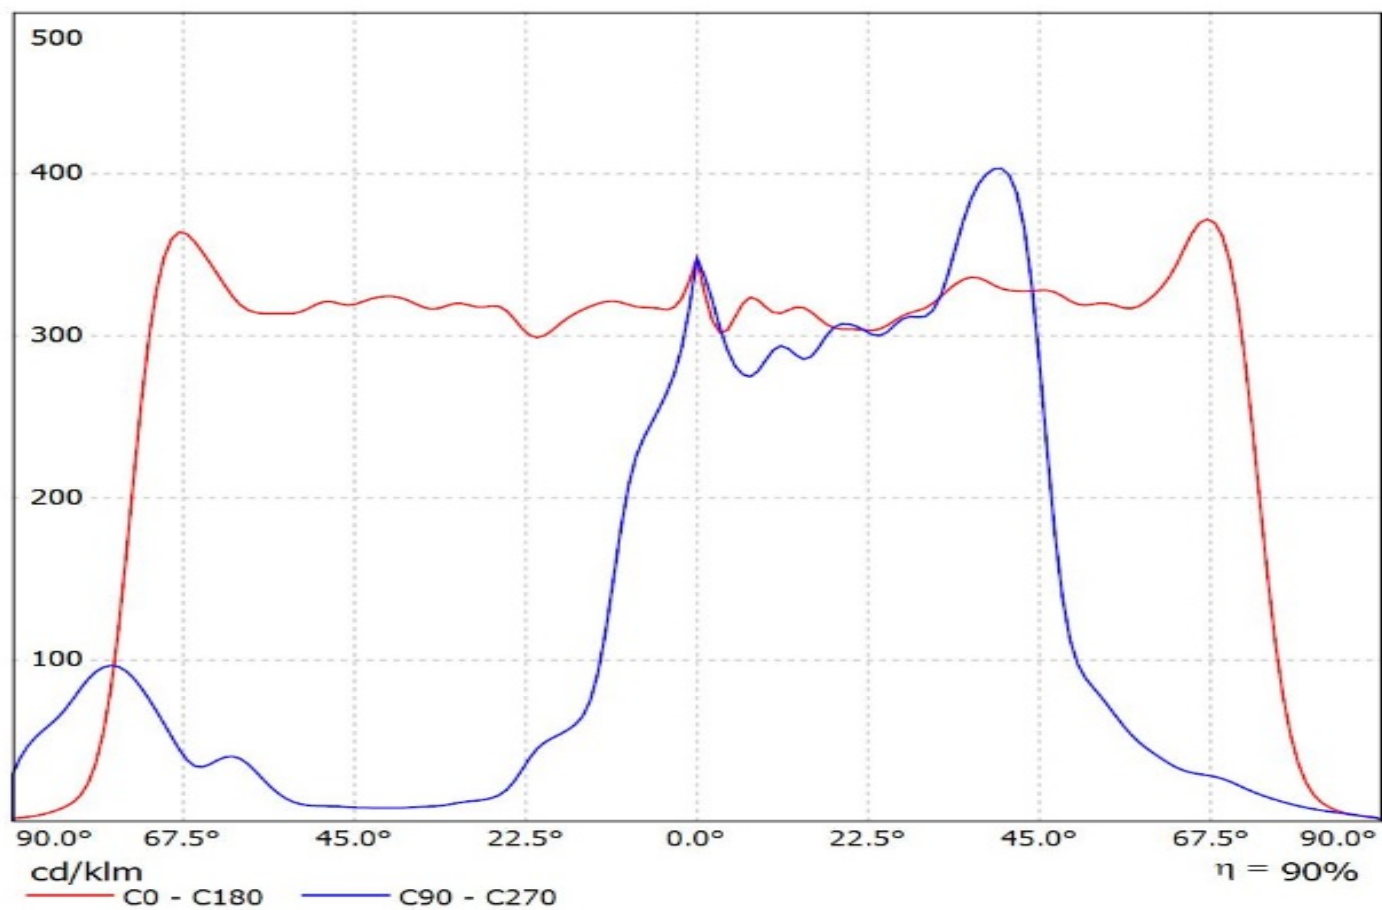


Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

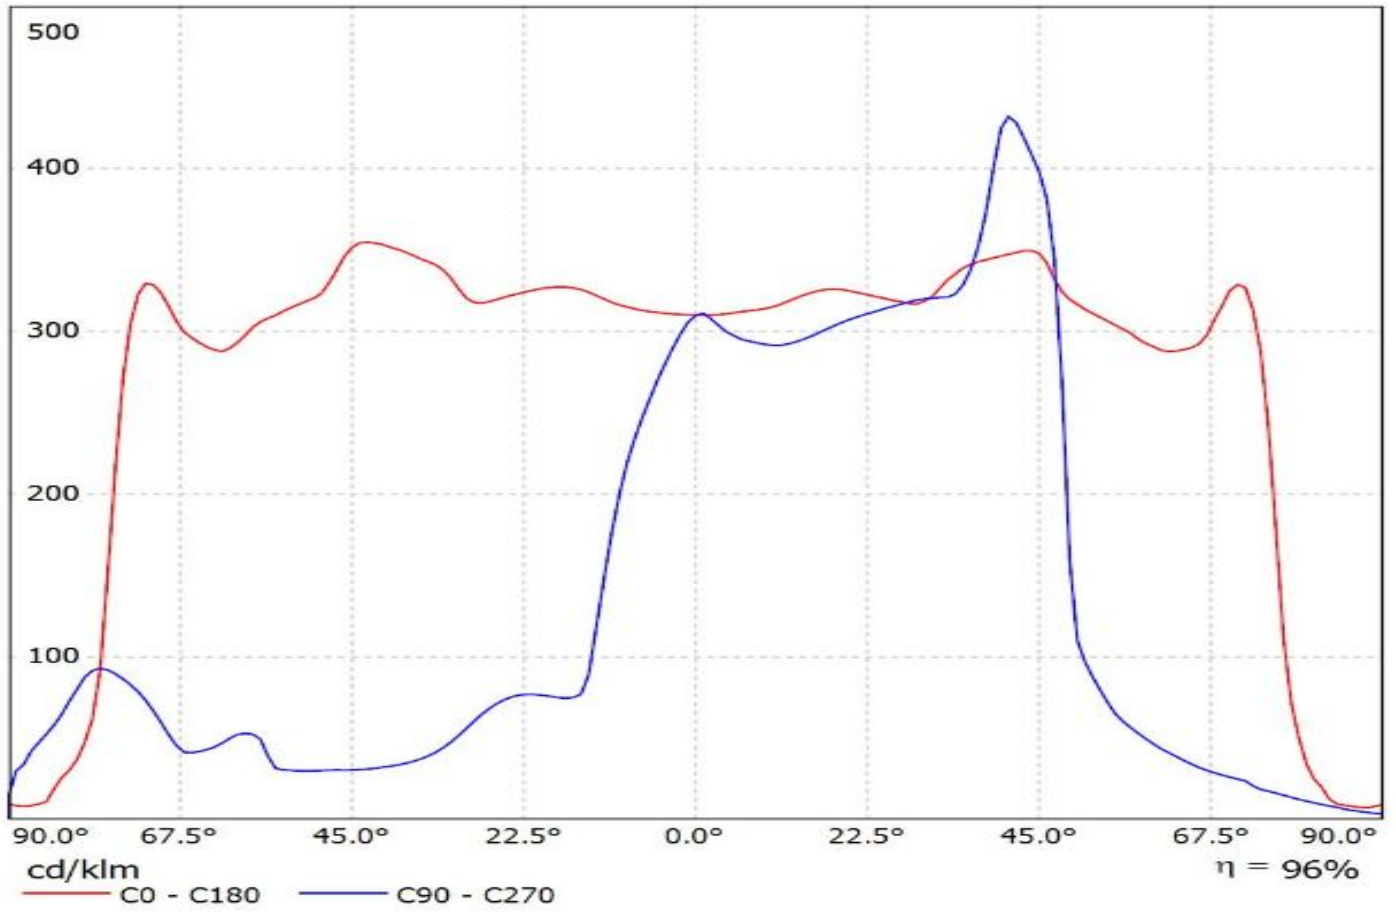

Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_Fortimo FastFlex LED board 2x6 DPX
G4_SIMULATED
Lamps: 1 x Fortimo FastFlex LED board 2x6 DPX G4

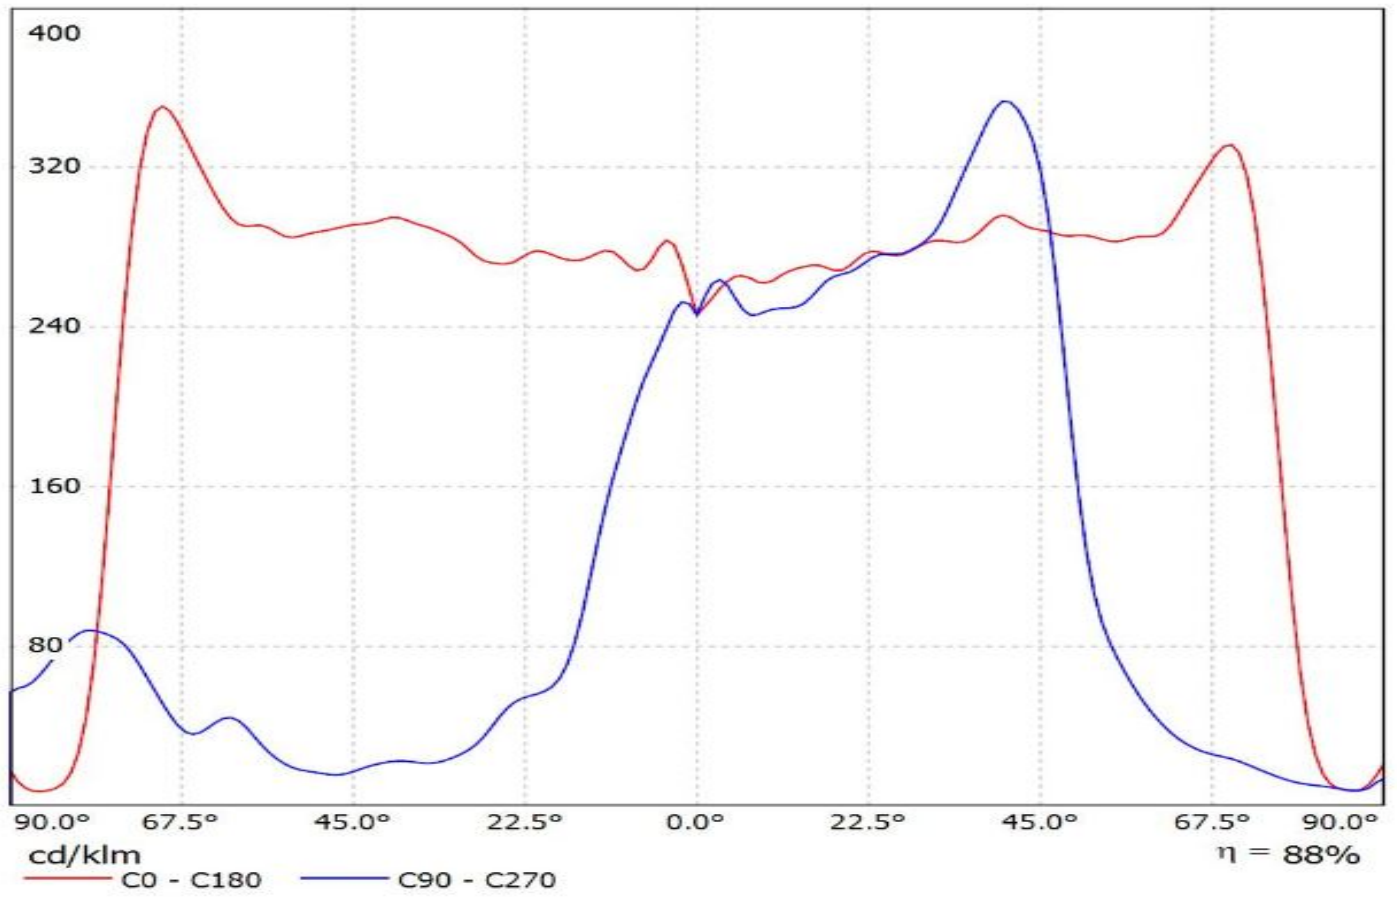


Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(Z5M1)_SIMULATED
Lamps: 1 x Seoul Z5M1

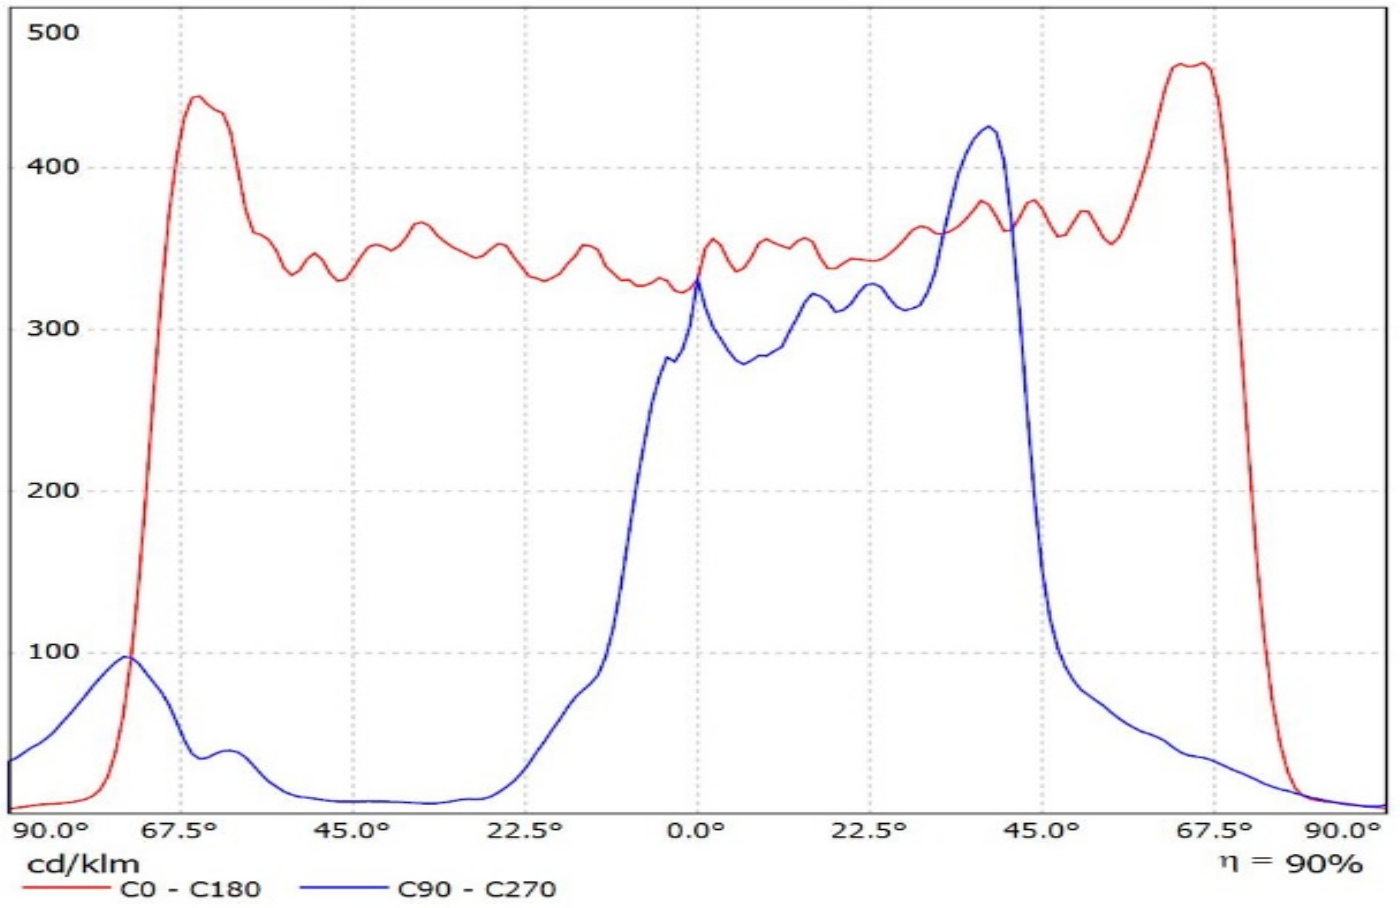

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(Z8Y22_PLUS)


Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

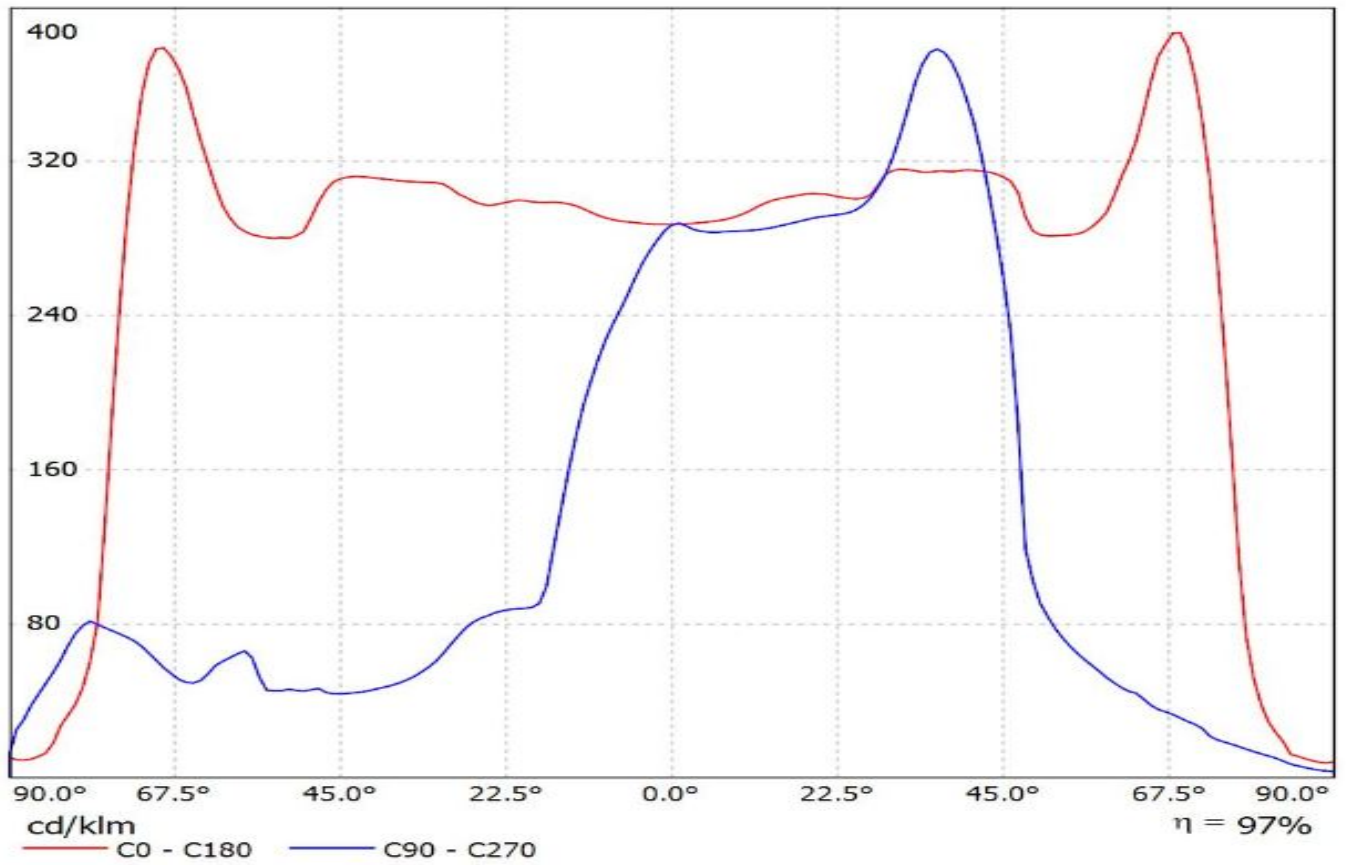

Ledil CS14144_STRADA-IP-2X6-ME_(TL1L4) / LDC (Linear)


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1346.96lm@250mA_CCT=6500K_P=8.5W_I=0.25A

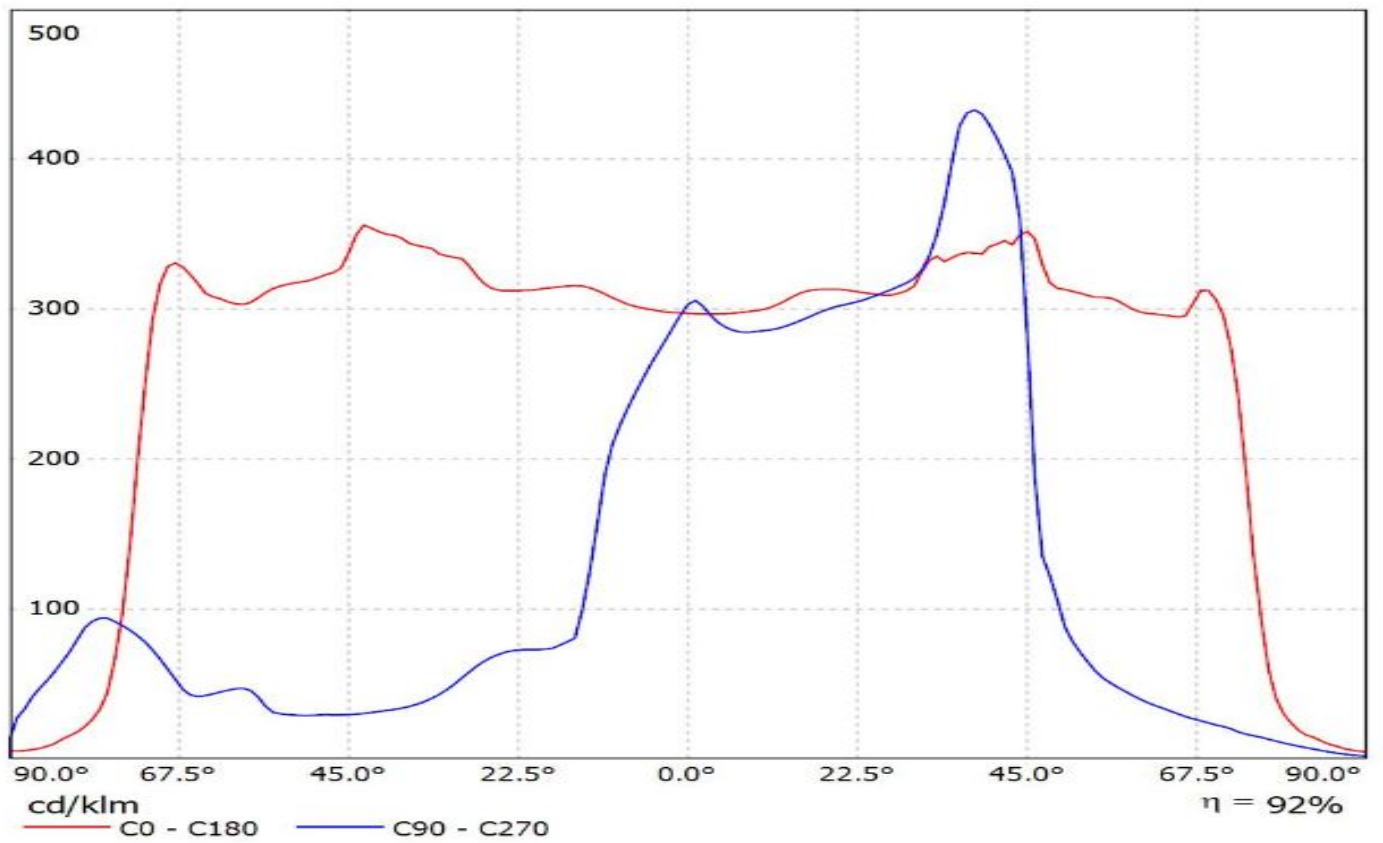

Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(Bridgelux_5050_Gen2)

Lamps: 1 x Bridgelux_5050_Gen2_2x6_(BXEP-57C-435-09B)_4268.87lm@250mA_CCT=5700K_P=24.6757W_I=0.25A

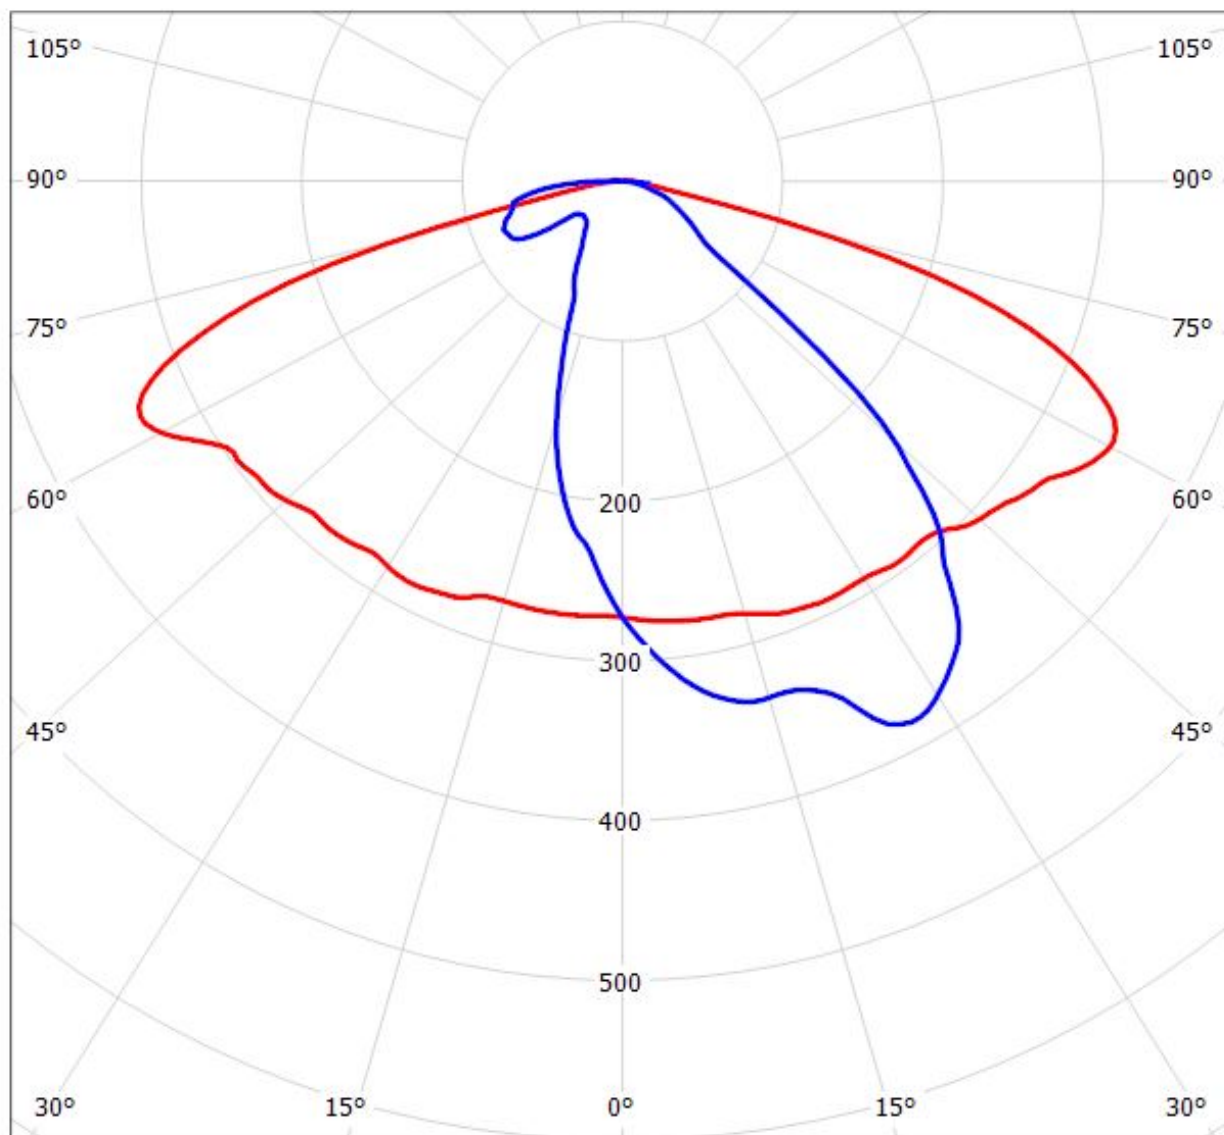


cd/klm

— C0 - C180 — C90 - C270

$\eta = 98\%$


Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XT-E)_02 Eff.92.8%

Lamps: 1 x CREE_XT-E_6x2_(XTEAWT-00-0000-000000HE4)_1253.02lm@250mA_P=8.85391W_I=249.8mA

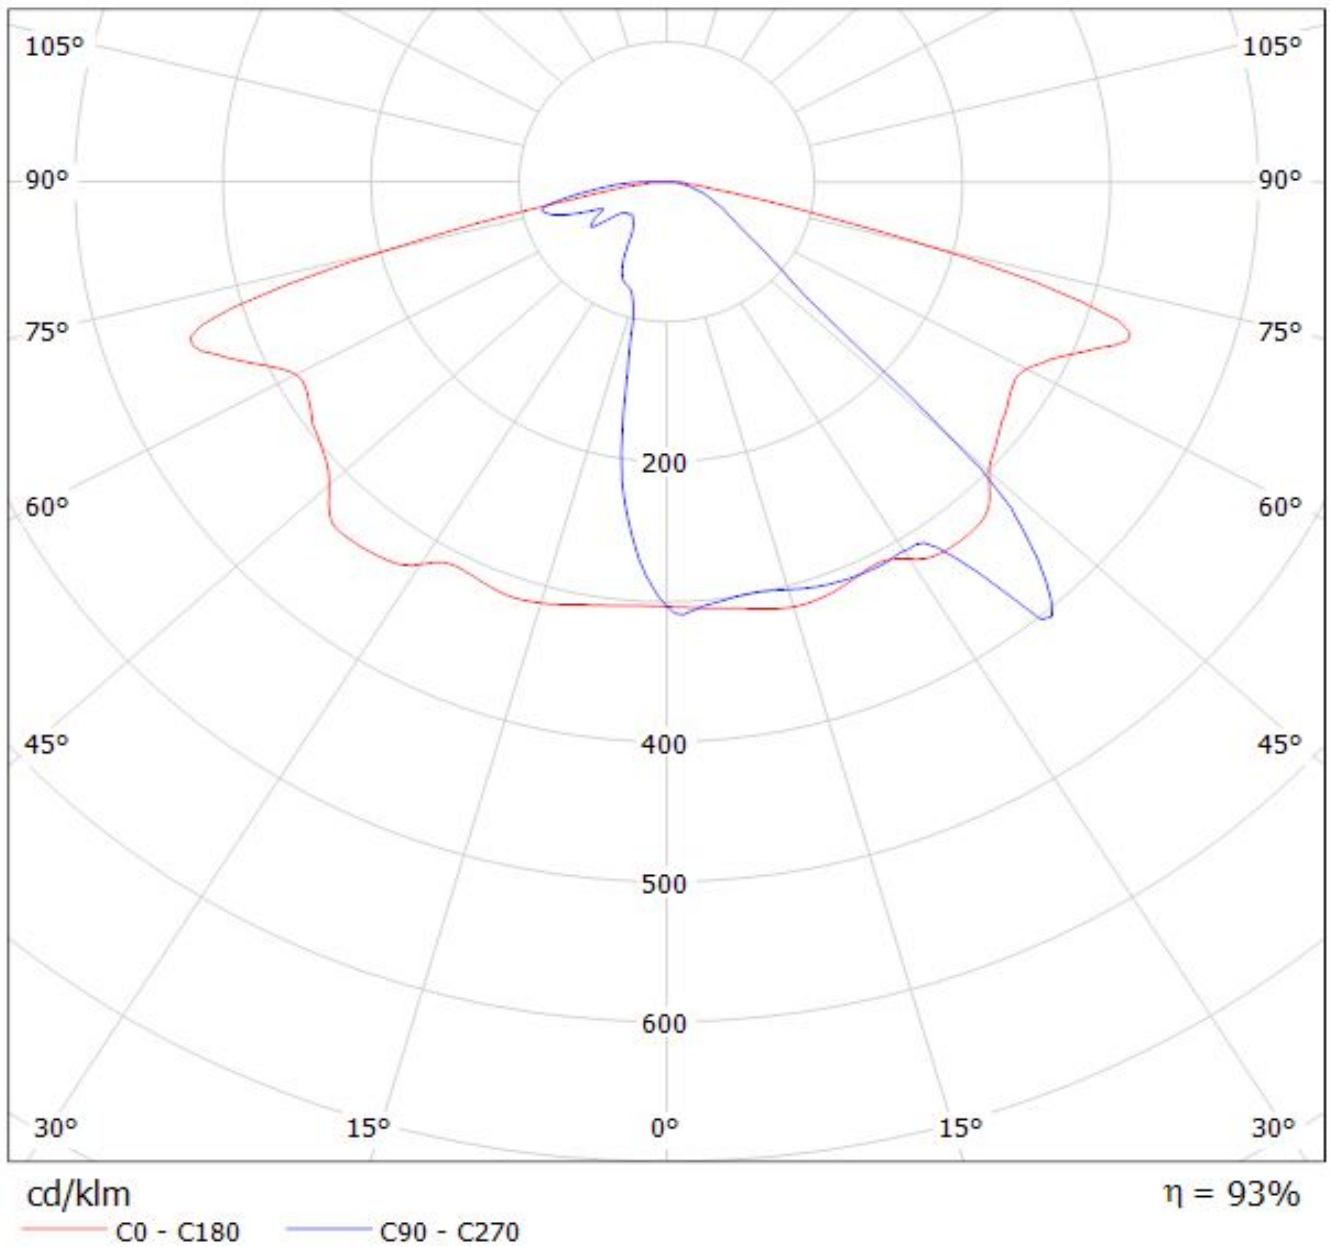

Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XP-L)

Lamps: 1 x CREE_XP-L_2x6_(XPLAWT-0-7A3-U50-0H-0001)_1253.88lm@250mA_P=8.22317W_I=249.8mA

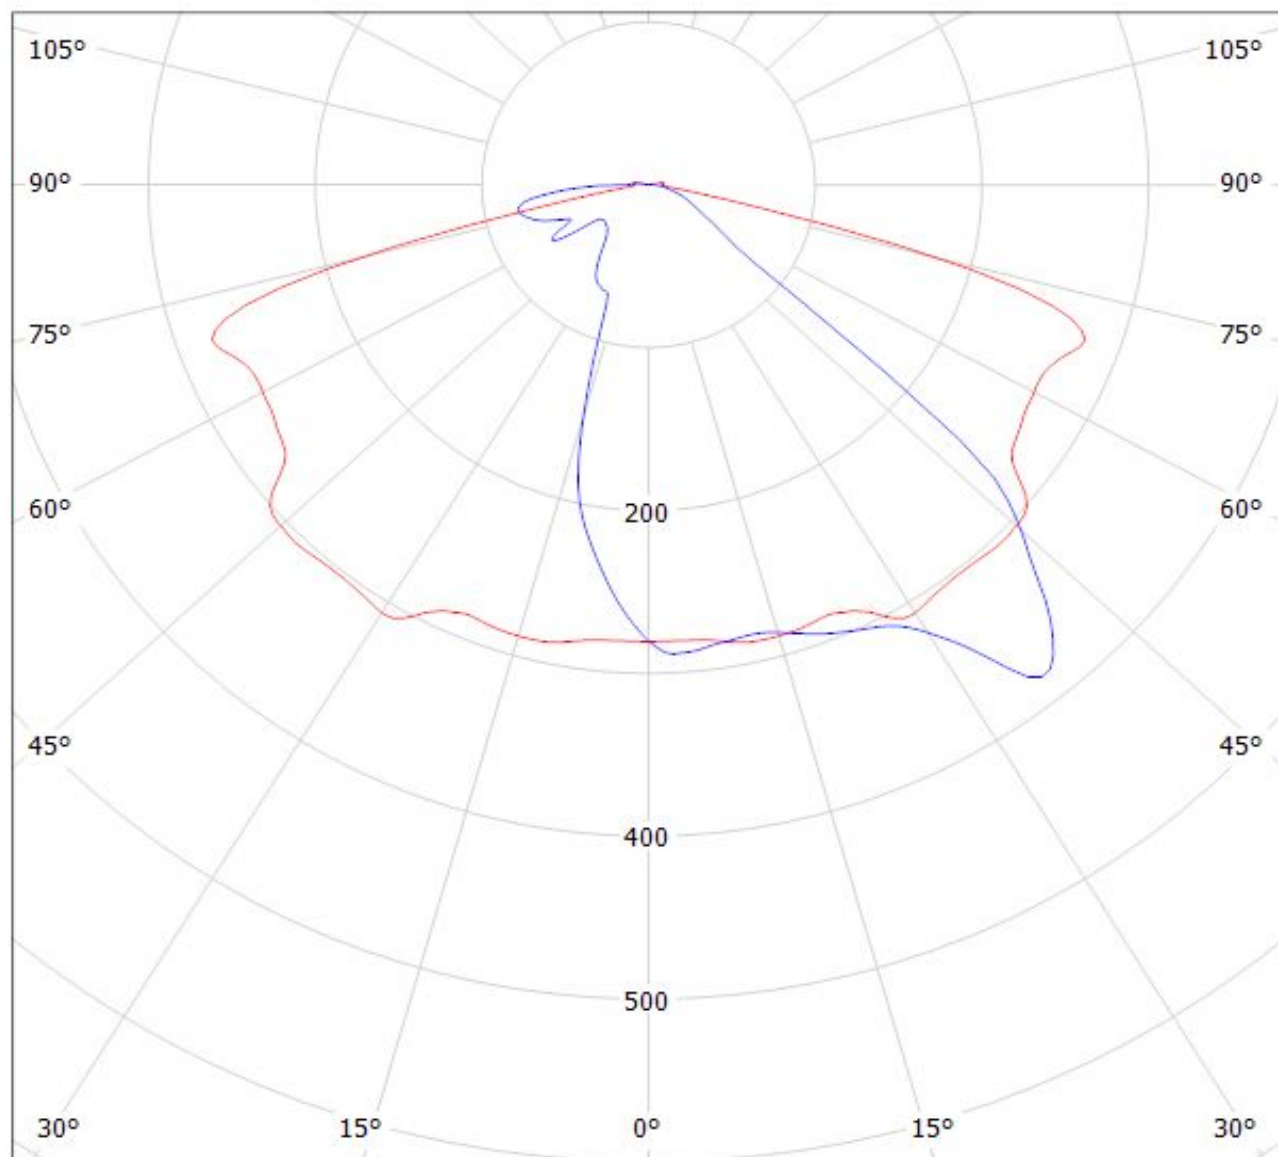


cd/klm

— C0 - C180

— C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_(XP-G2)
Lamps: 1 x XP-G2_2x6_1246.35lm@250mA_U=8.54391W_I=249.8mA

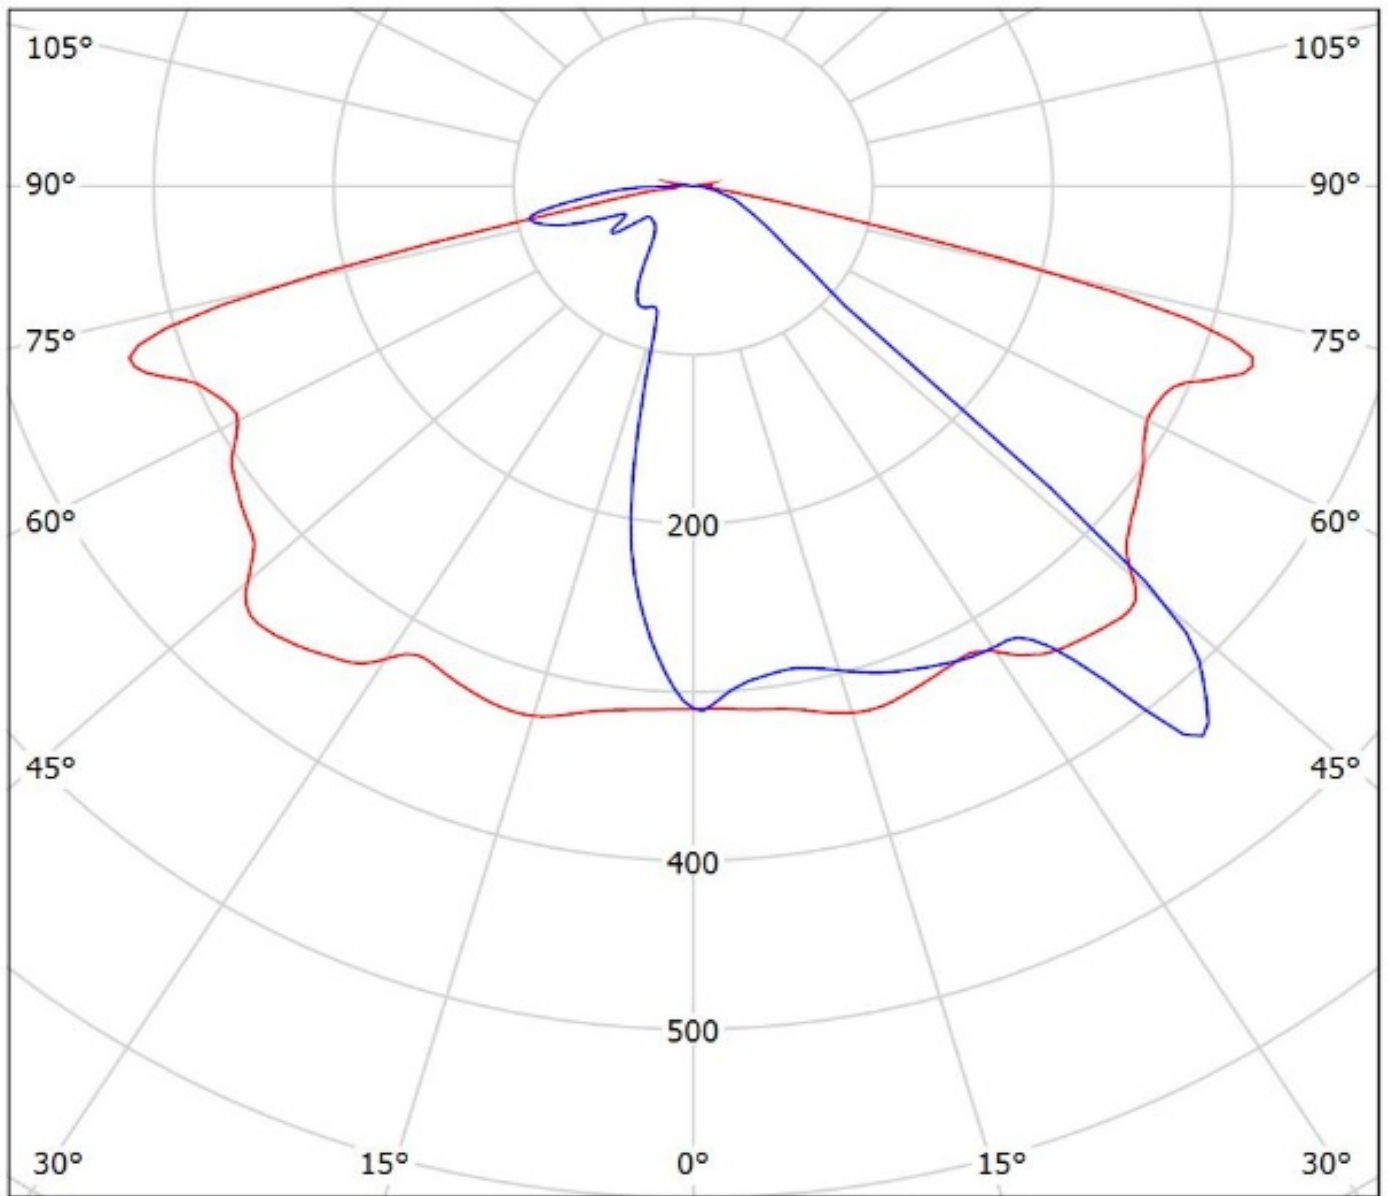


cd/klm

— C0 - C180 — C90 - C270

$\eta = 96\%$


Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

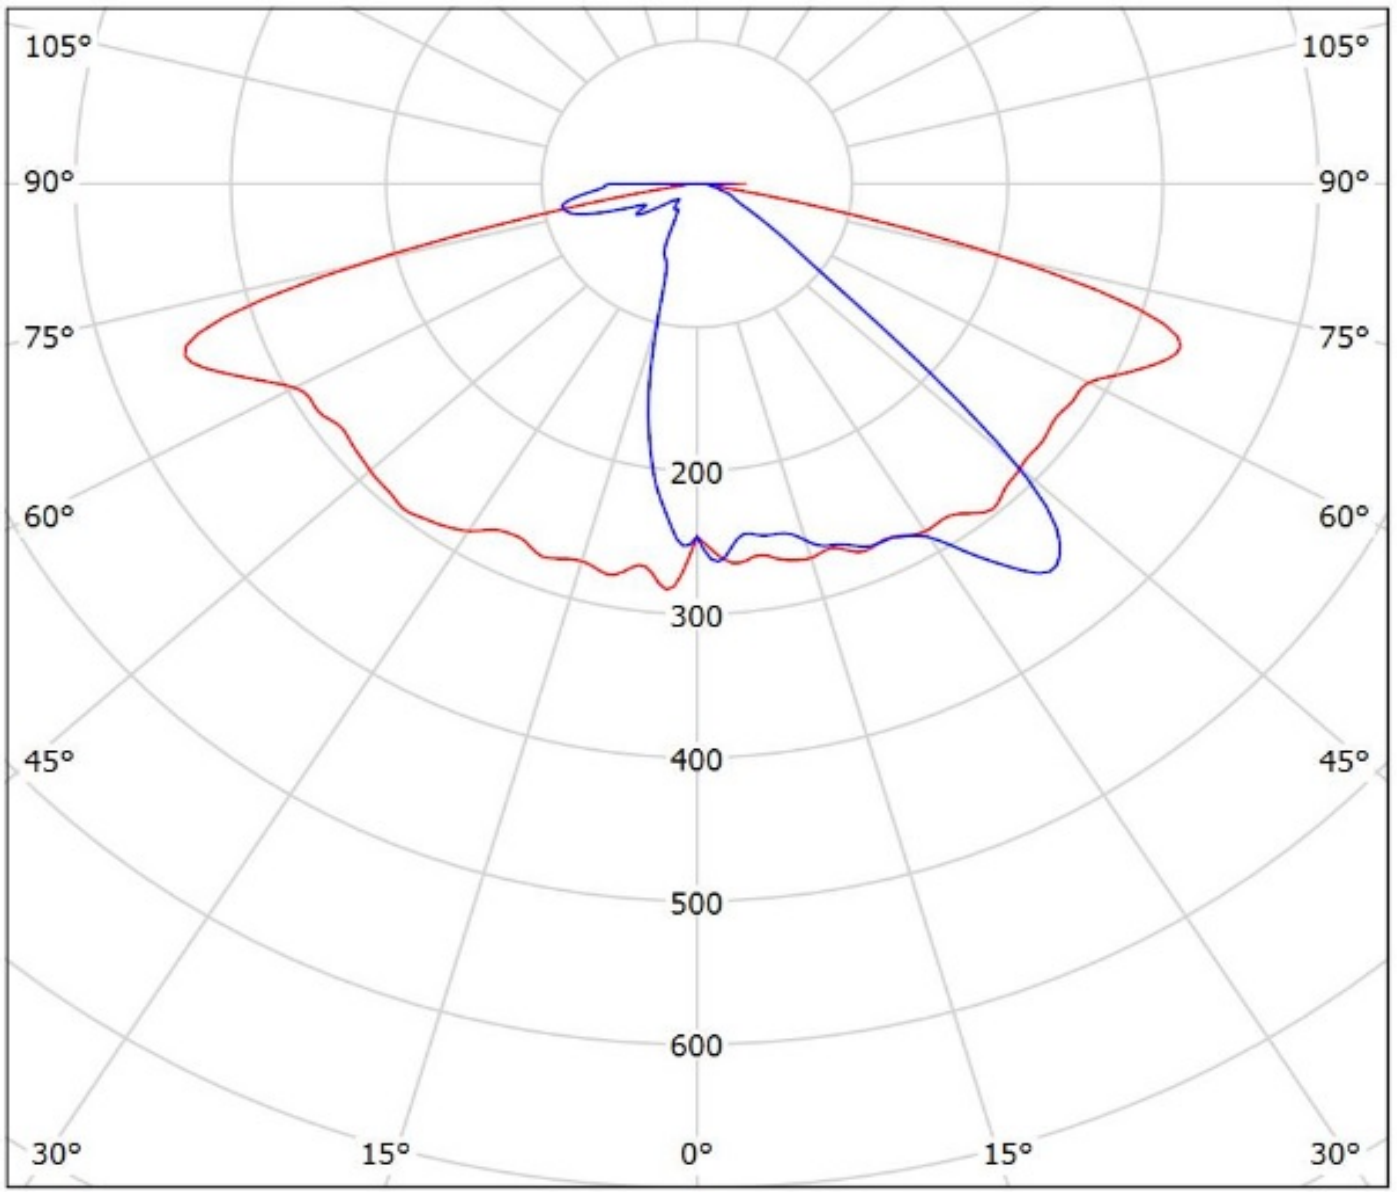

cd/klm
— C0 - C180 — C90 - C270


$\eta = 88\%$

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(XP-L2)
Lamps: 1 x Cree_XP-L2x12_(XPGBWT-H1-3B0-R5-0-01)
1666.32lm@250mA_CCT=5000_P=8.239W_I=0.25A

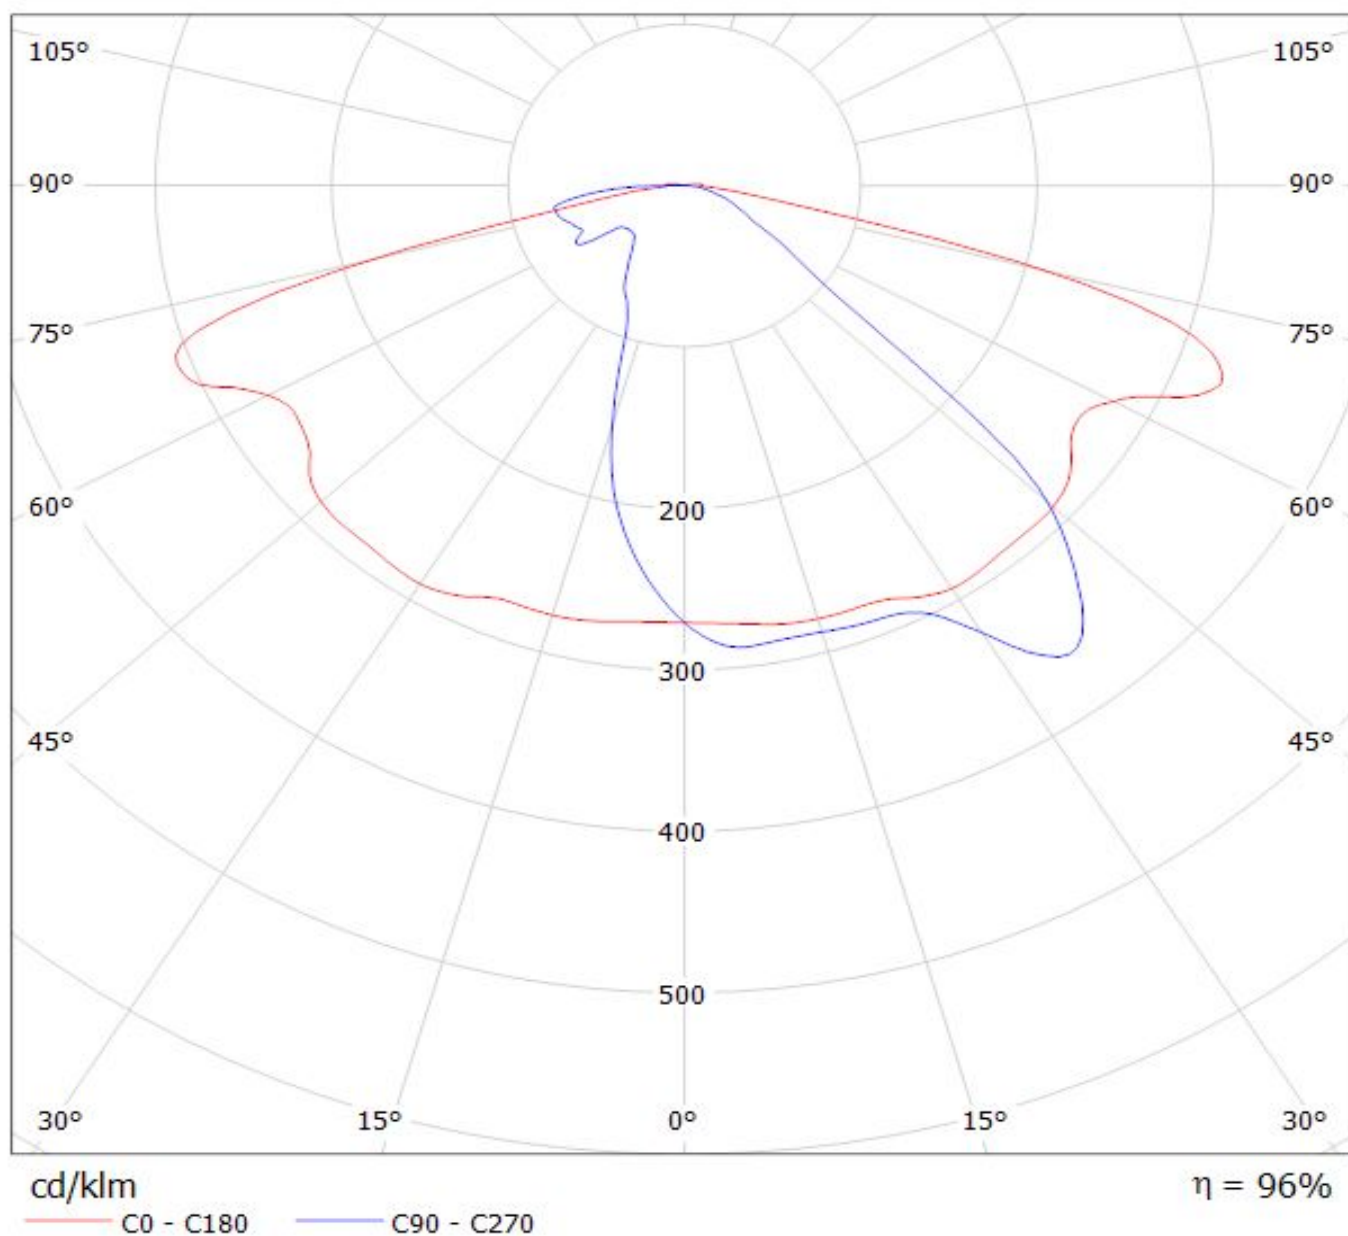

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(H35C1)

Lamps: 1 x LG_H35C1_2x6_1389.53lm@250mA_CCT=5700_P=8.59425W_I=0.250A

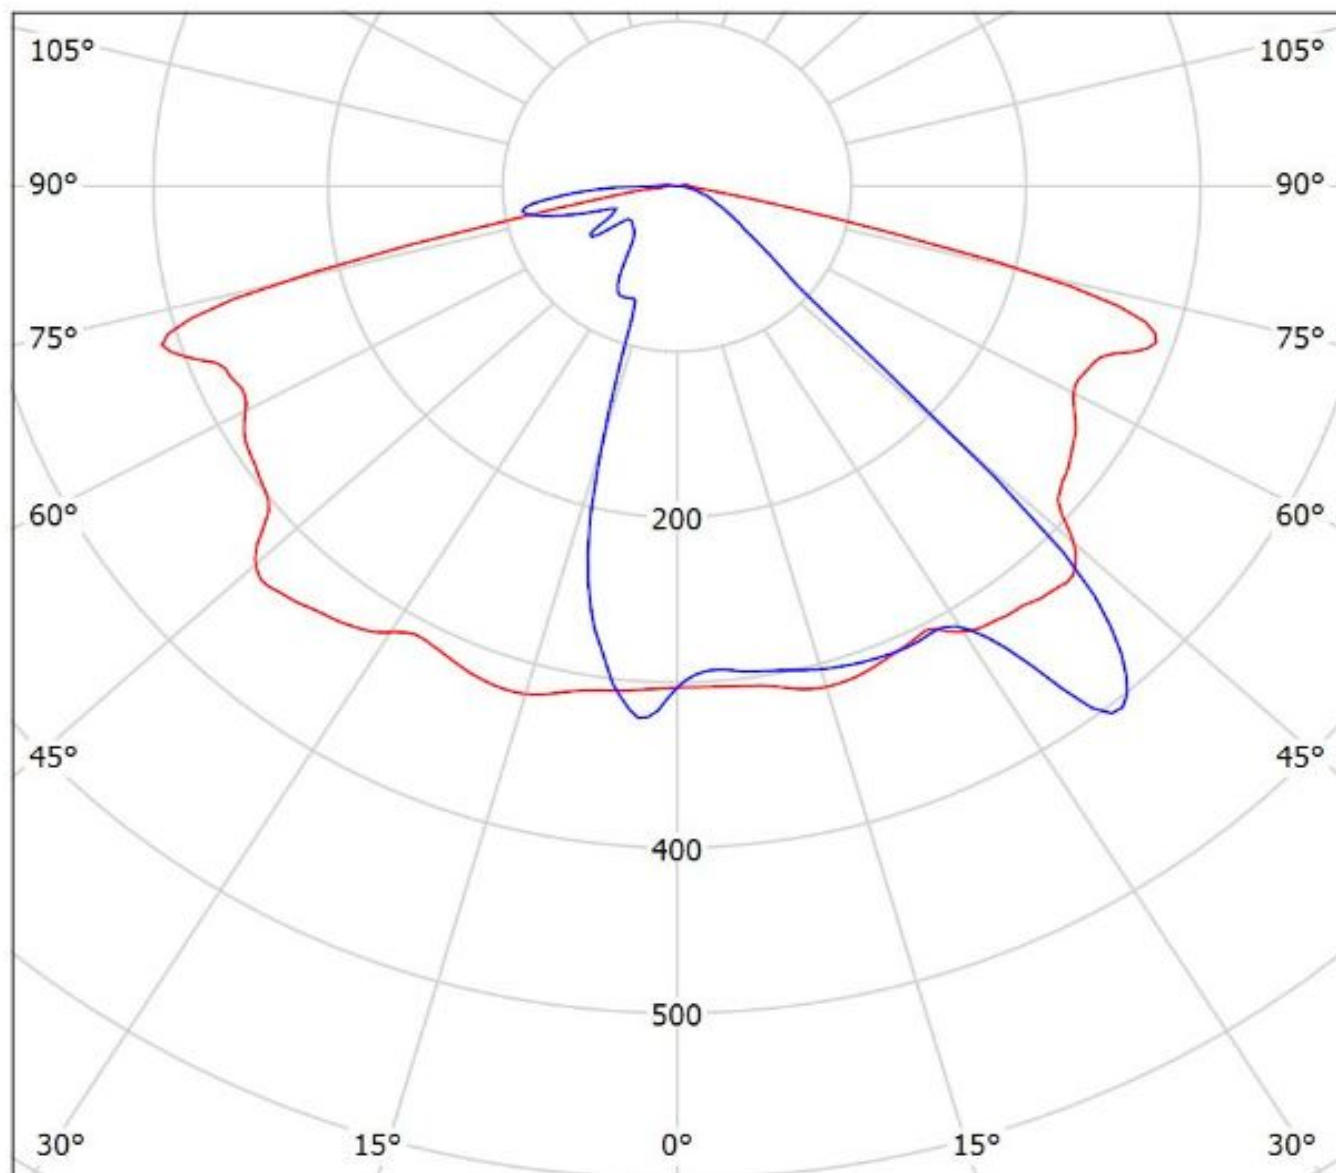


cd/klm

— C0 - C180

— C90 - C270

$\eta = 95\%$


Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(XR-TX)
Lamps: 1 x Luxeon_XR-TX_1377.67lm@250mA_P=8.3973W_I=0.250A

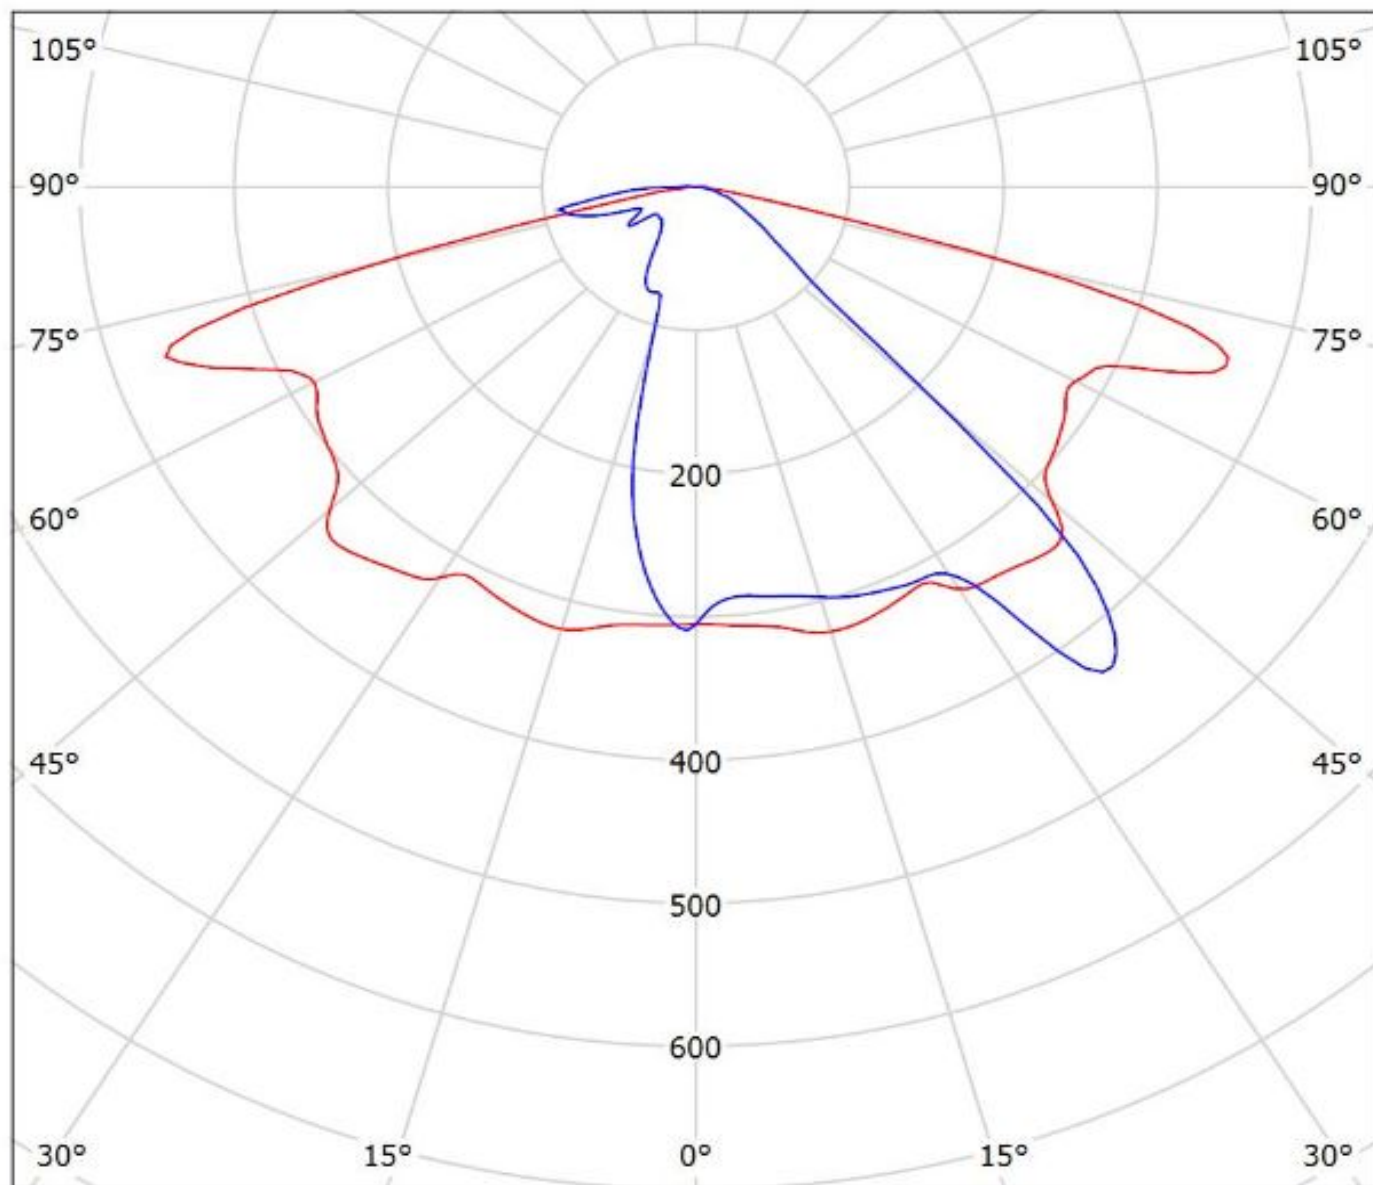


cd/klm
— C0 - C180 — C90 - C270

$\eta = 96\%$

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(NVSL219CT)
Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

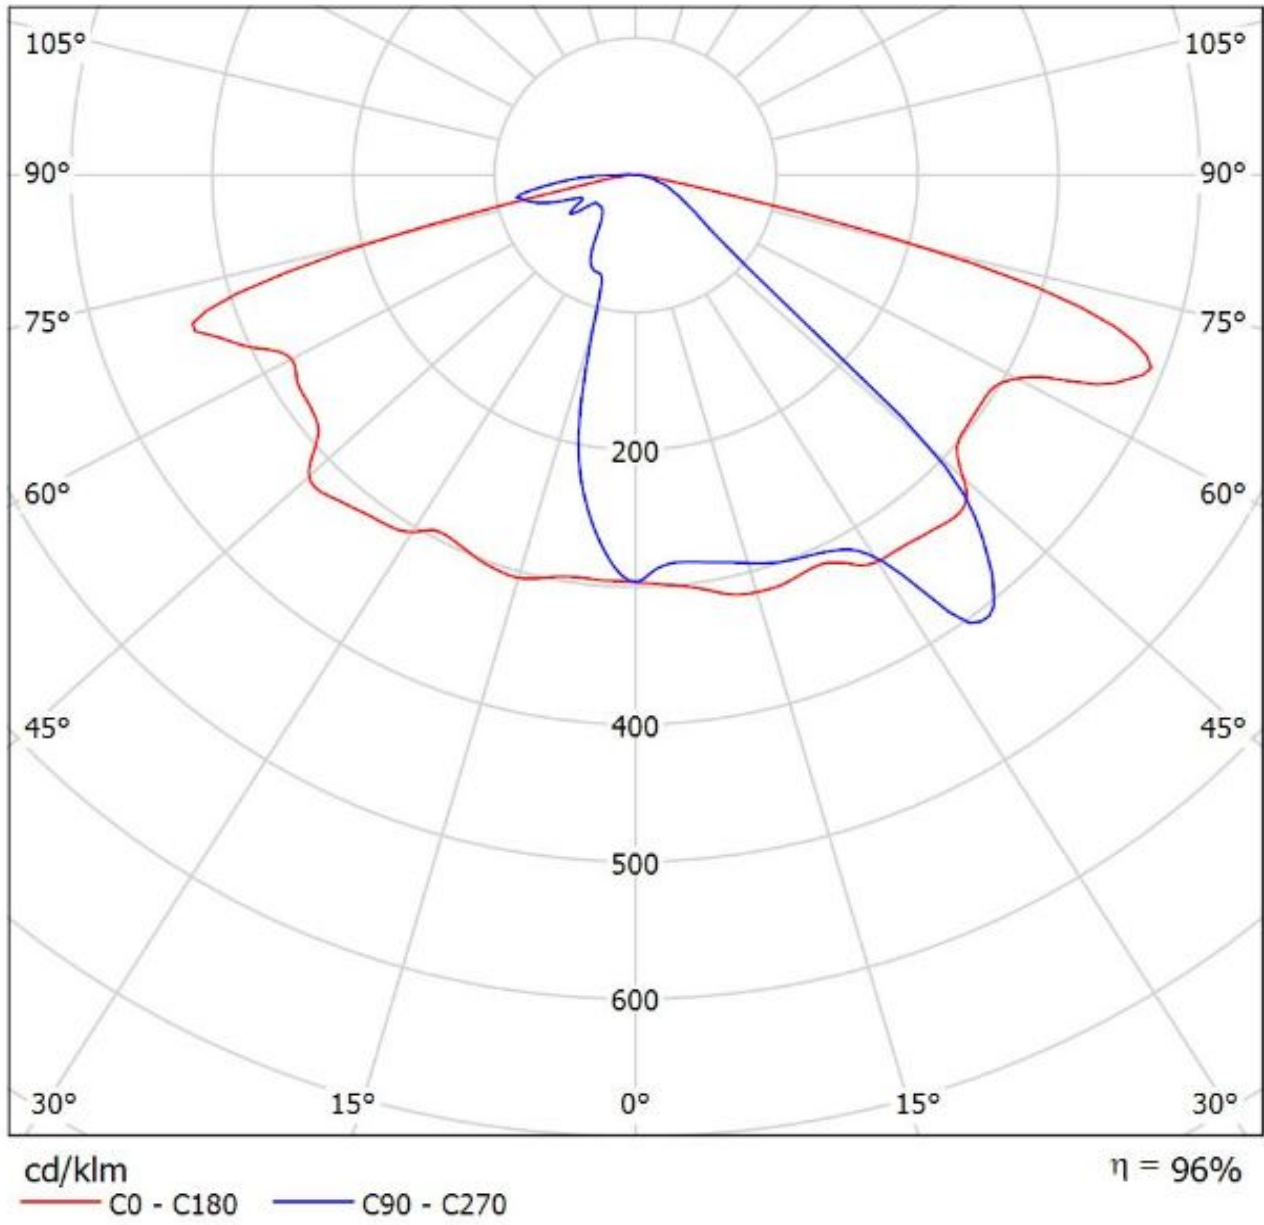

Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(Duris_P8)_SIMULATED
Lamps: 1 x Osram Duris P8

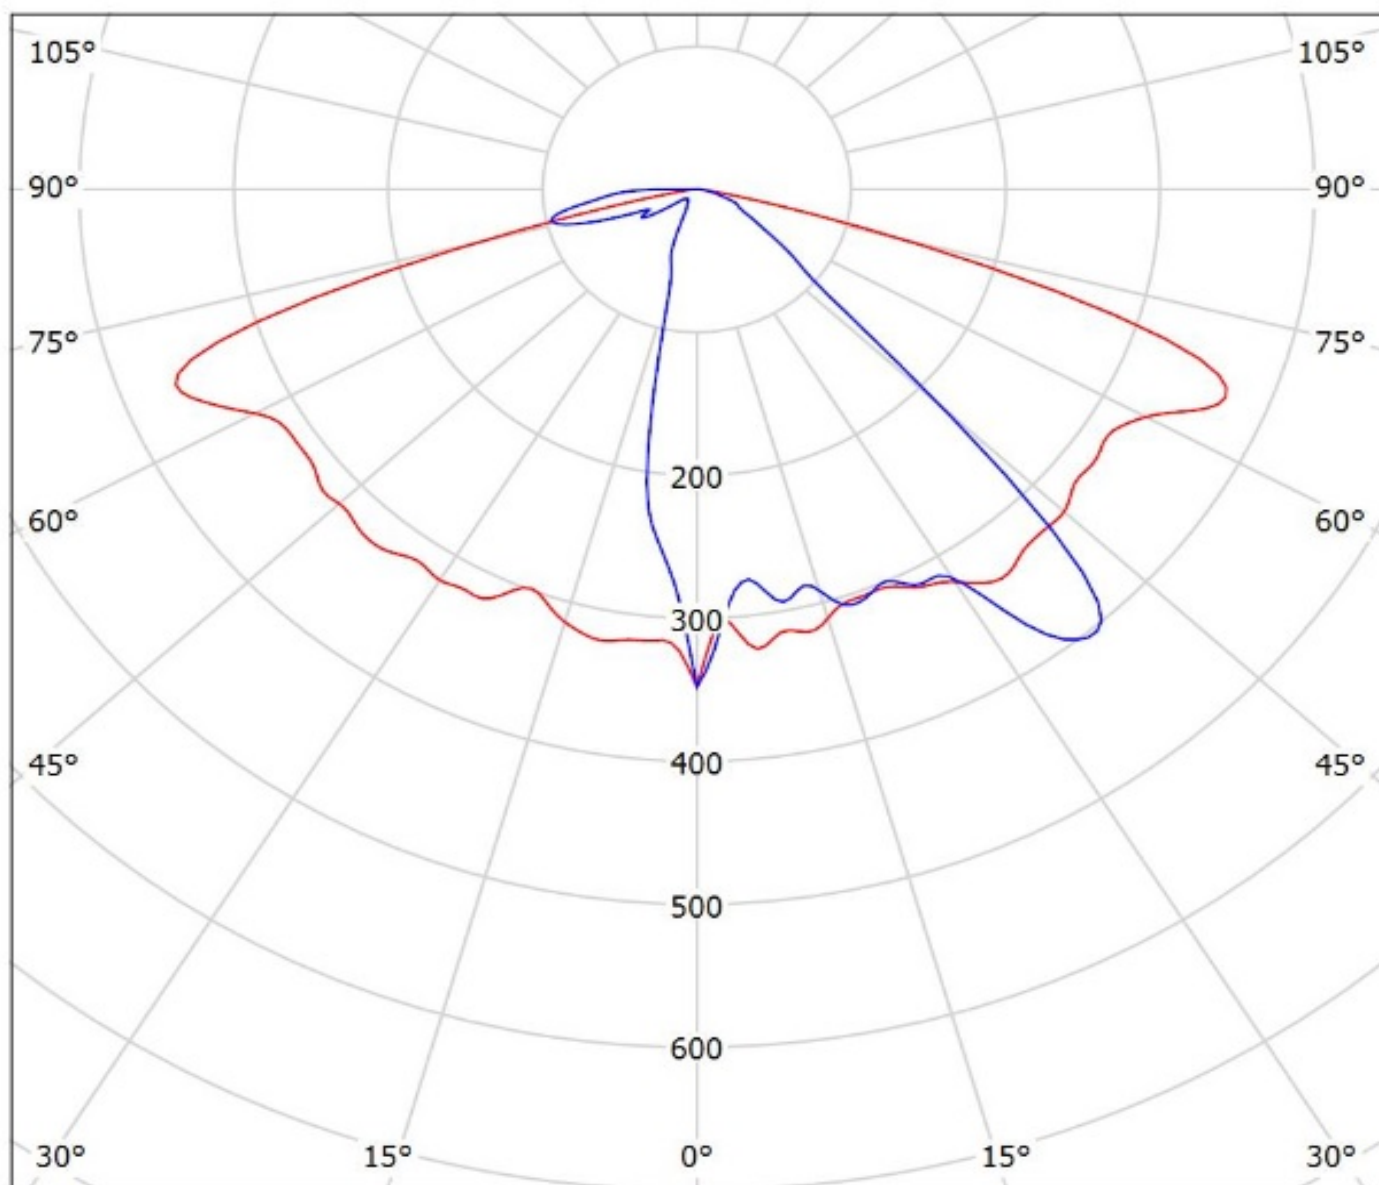


cd/klm


— C0 - C180 — C90 - C270

$\eta = 90\%$

Luminaire: LEDiL Oy CS14144_STRADA-IP-2X6-ME_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

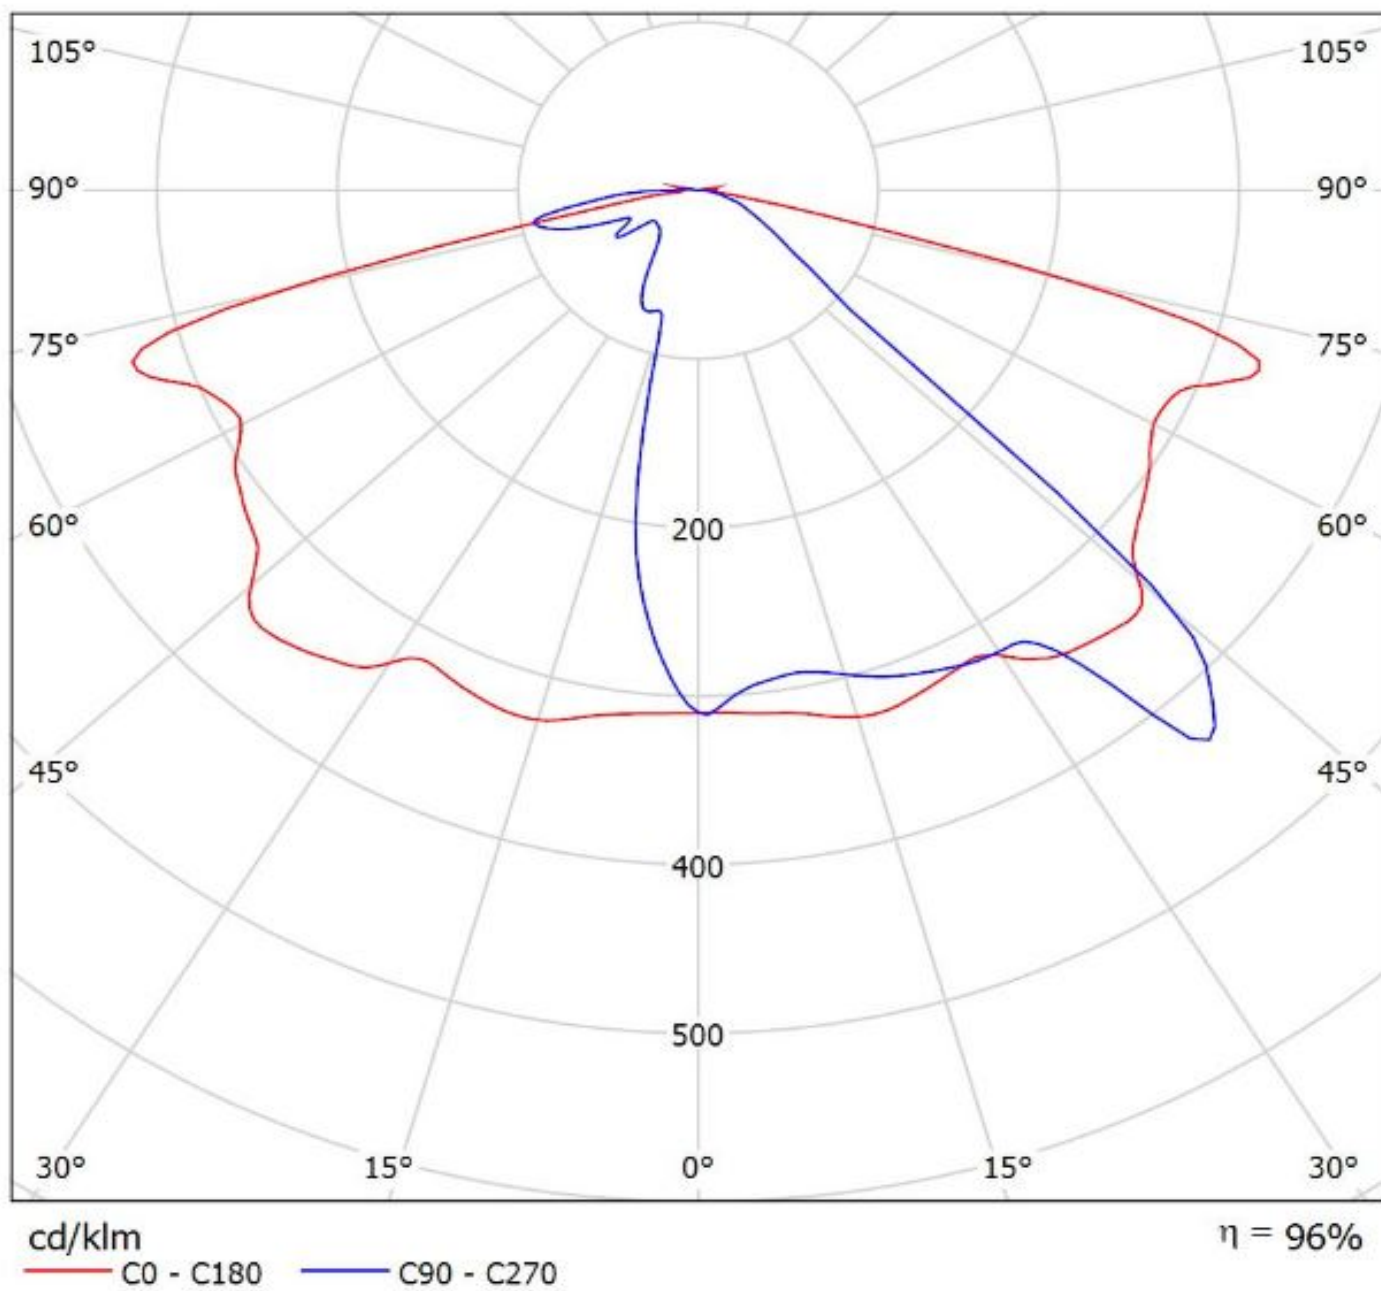


Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_Fortimo FastFlex LED board 2x6 DPX
G4_SIMULATED
Lamps: 1 x Fortimo FastFlex LED board 2x6 DPX G4

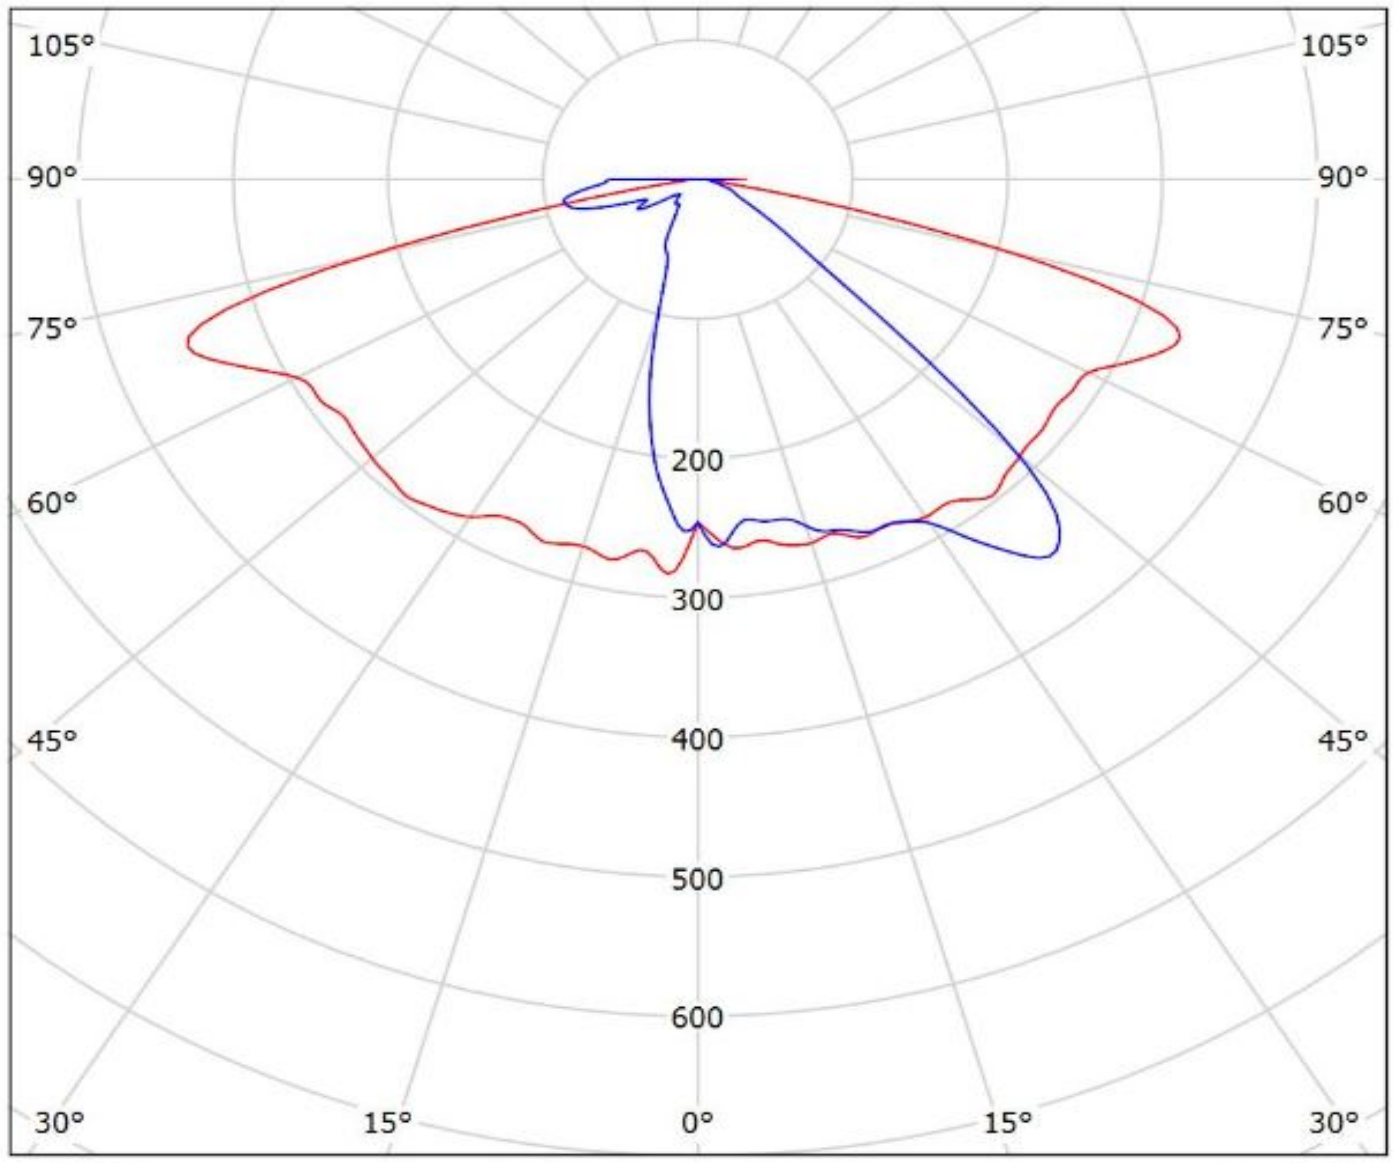

cd/klm
— C0 - C180 — C90 - C270

$\eta = 88\%$

Luminaire: Ledil Oy CS14144_STRADA-IP-2X6-ME_(Z5M1)_SIMULATED
Lamps: 1 x Seoul Z5M1

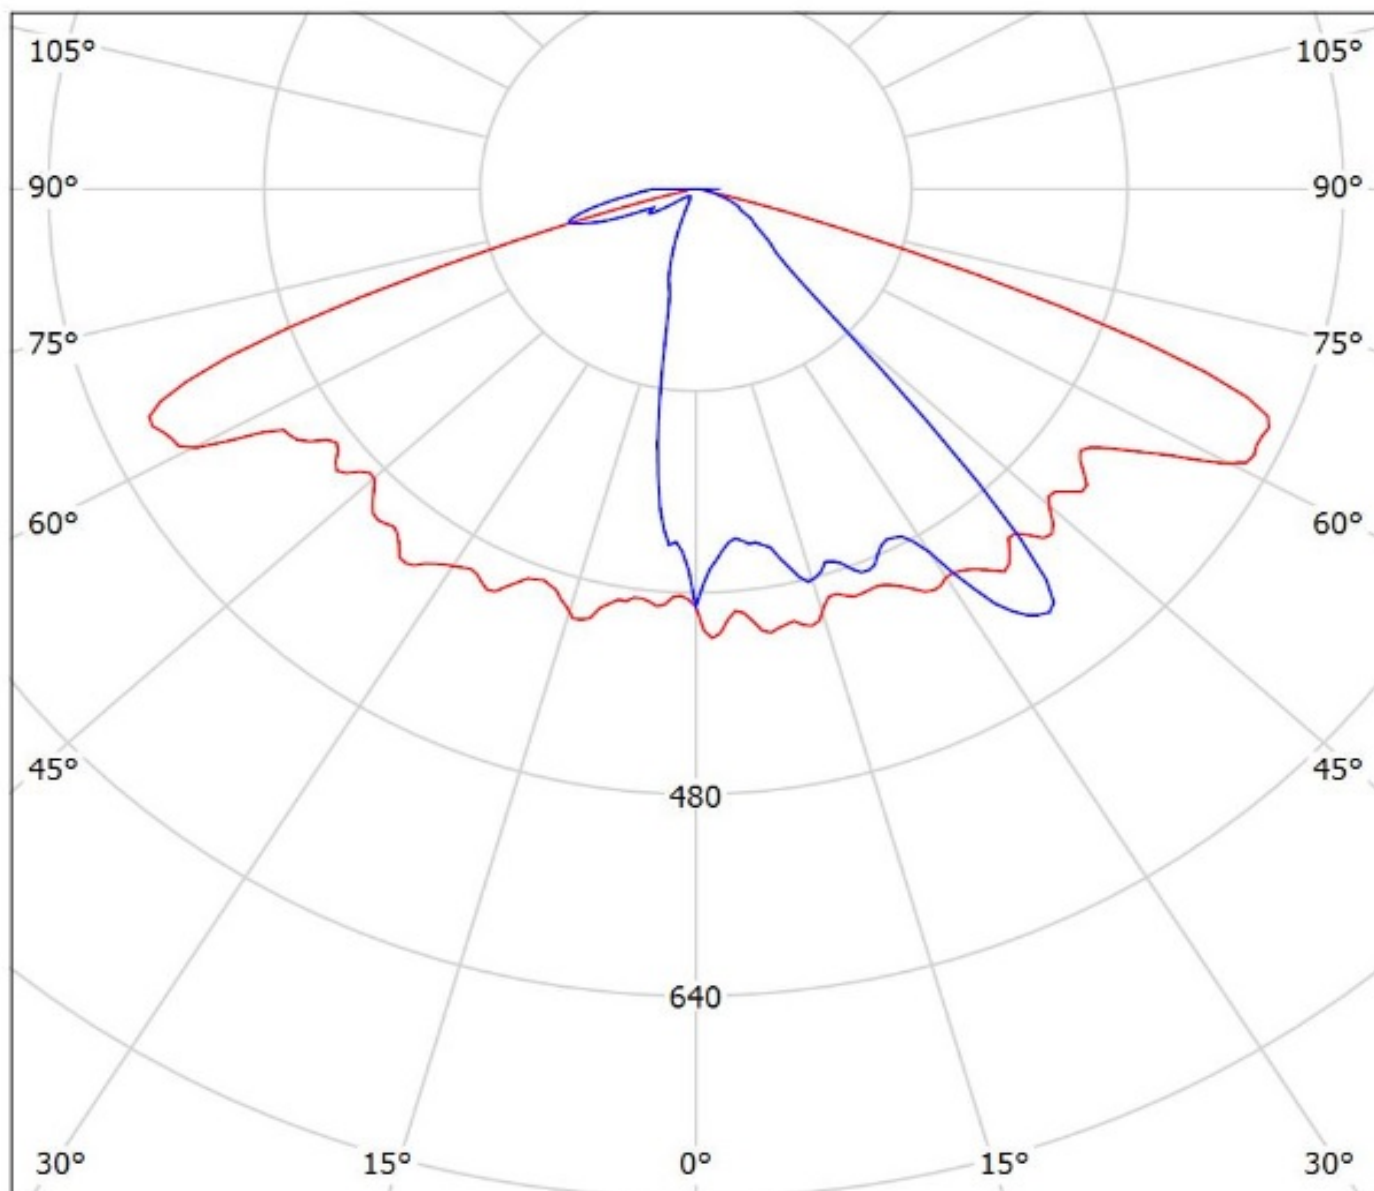


cd/klm

— C0 - C180 — C90 - C270

$\eta = 90\%$

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(Z8Y22_PLUS)

Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

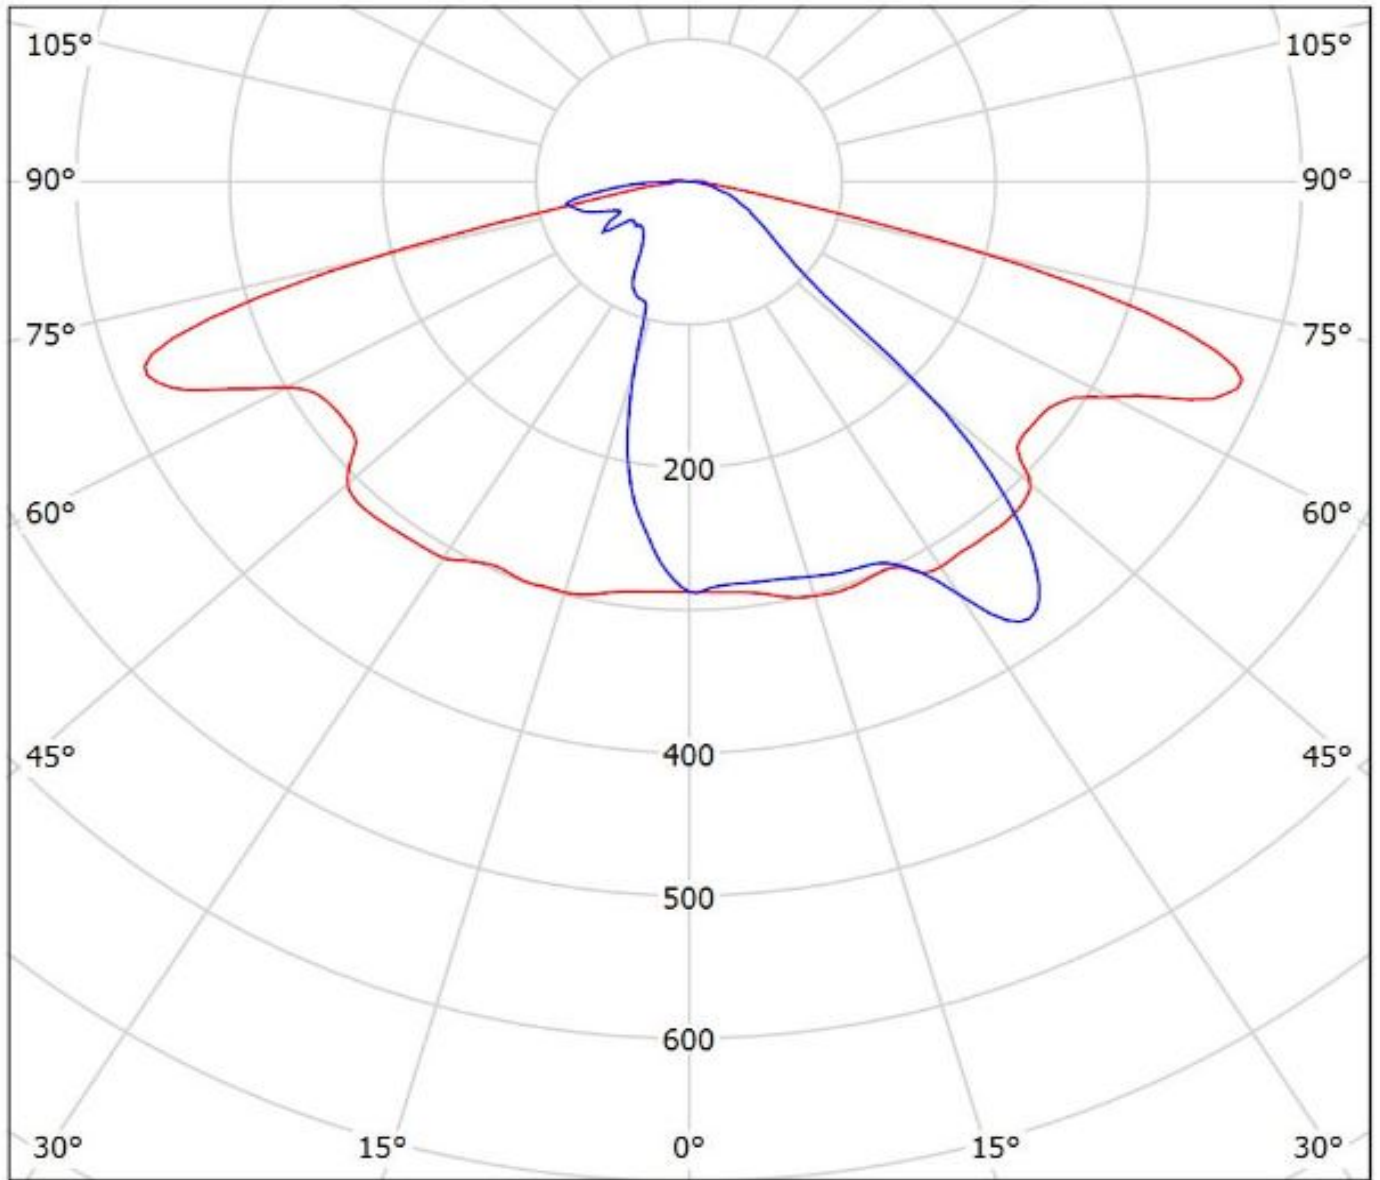

cd/klm


— C0 - C180 — C90 - C270

$\eta = 97\%$

Ledil CS14144_STRADA-IP-2X6-ME_(TL1L4) / LDC (Polar)

Luminaire: Ledil CS14144_STRADA-IP-2X6-ME_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1346.96lm@250mA_CCT=6500K_P=8.5W_I=0.25A

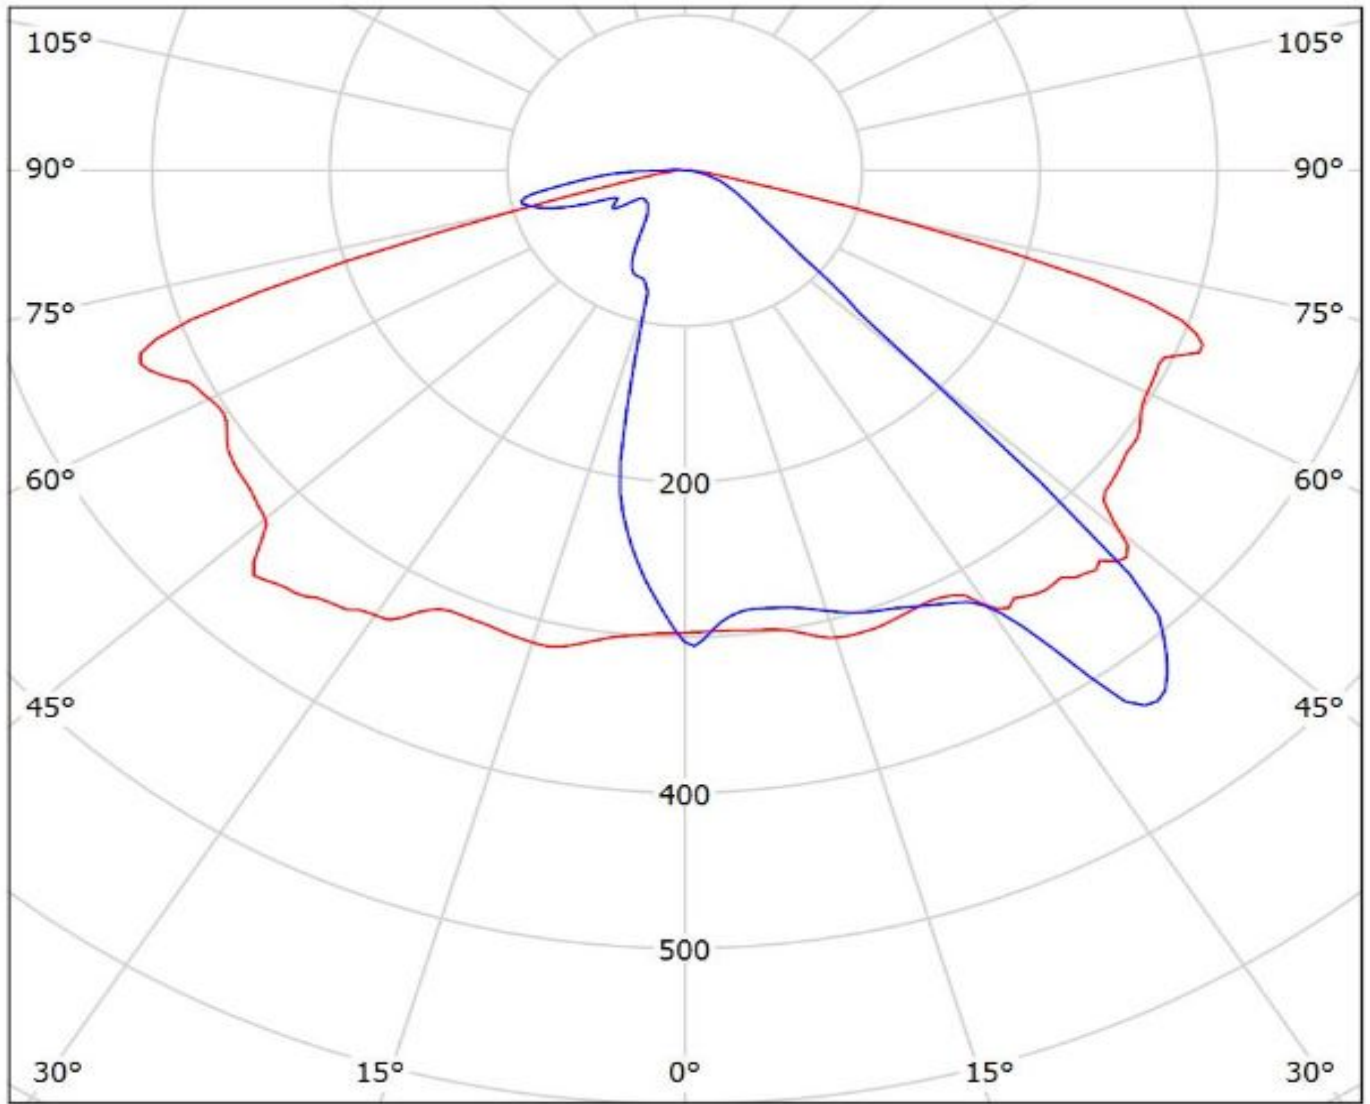

cd/klm

— C0 - C180 — C90 - C270

$\eta = 92\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.