


# FERYSTER

Sketch with main dimensions

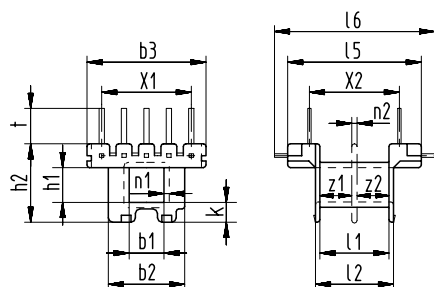


For PCB mounting and SMD technique.

Only fully fitted available.

Standard material PA 6.6 - 30 H,  
for SMD versions we recommend PPS material.

ST  
with molded-in pins 0,4 x 0,6 mm



$z1$	$z2$	$b1$	$b2$	$b3$	$h1$	$h2$	$k$	$l1$	$l2$	$l5$	$l6$	$n1$	$n2$	$t$	$X1$	$X2$	$X3$ ①	Type	Art. No.
$\pm 0,1$	$\pm 0,1$	$\pm 0,1$	$\pm 0,2$	$\pm 0,2$	$\pm 0,1$	$\pm 0,2$	$\pm 0,2$	$\pm 0,2$	$\pm 0,2$	$\pm 0,2$	$\pm 0,3$	+0,2	$\pm 0,1$	$\pm 0,2$	$\pm 0,2$	$\pm 0,2$	2x5	EE 12,6/3,9/2 ST      Wz 7678/2 ST	1946

①  $X3$  = max. number of slots or terminals

www.  
**FERYSTER®**  
-pl

FERYSTER® spółka jawna B. i Z. Sobków  
PRODUCENT ELEMENTÓW INDUKCYJNYCH

## EF12.6-K-H-10P-DS-1946