SURFACE MOUNT DISPLAY

Part Number: ACSA04-41SEKWA-F01

Super Bright Orange


Features

- 0.4 inch digit height.
- Low current operation.
- Excellent character appearance.
- Mechanically rugged.
- Gray face, white segment.
- Package:400pcs/ reel.
- Moisture sensitivity level : level 2a.
- RoHS compliant.

Description

The Super Bright Orange device is made with AlGaInP (on GaAs substrate) light emitting diode chip.

Package Dimensions& Internal Circuit Diagram

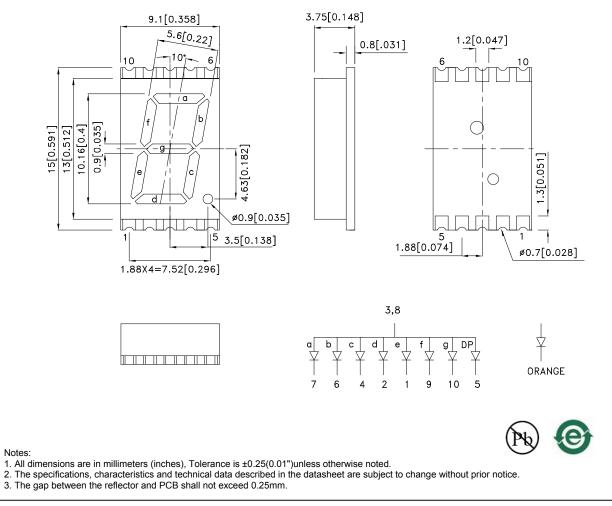

SPEC NO: DSAF7023 APPROVED: WYNEC REV NO: V.11A CHECKED: Joe Lee DATE: JAN/12/2015 DRAWN: P.Cheng PAGE: 1 OF 5 ERP: 1351000372

Selection Guide										
Part No.	Dice	Lens Type	lv (ucd) [1] @ 10mA		Description					
			Min.	Тур.	Decemption					
ACSA04-41SEKWA-F01	Super Bright Orange (AlGaInP)	White Diffused	21000	60000	Common Anode, Rt.					
			*9000	*15000	Hand Decimal.					

Note:

1. Luminous intensity/ luminous Flux: +/-15%.

*Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Super Bright Orange	610		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Super Bright Orange	601		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Super Bright Orange	29		nm	I⊧=20mA
С	Capacitance	Super Bright Orange	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Super Bright Orange	2.1	2.5	V	IF=20mA
lr	Reverse Current	Super Bright Orange		10	uA	VR=5V

Notes:


Wavelength: +/-1nm.
Forward Voltage: +/-0.1V.
Wavelength value is traceable to the CIE127-2007 compliant national standards.
Excess driving current and/or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

Absolute Maximum Ratings at TA=25°C


Parameter	Super Bright Orange	Units	
Power dissipation	75	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	195	mA	
Reverse Voltage	5	V	
Operating / Storage Temperature	-40°C To +85°C		

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

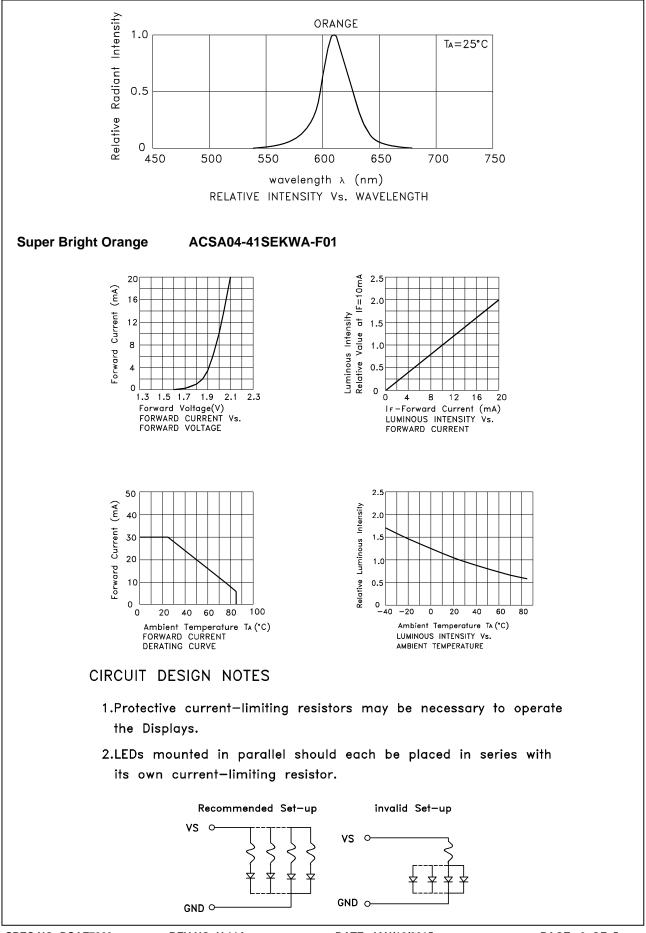


REV NO: V.11A CHECKED: Joe Lee DATE: JAN/12/2015 DRAWN: P.Cheng

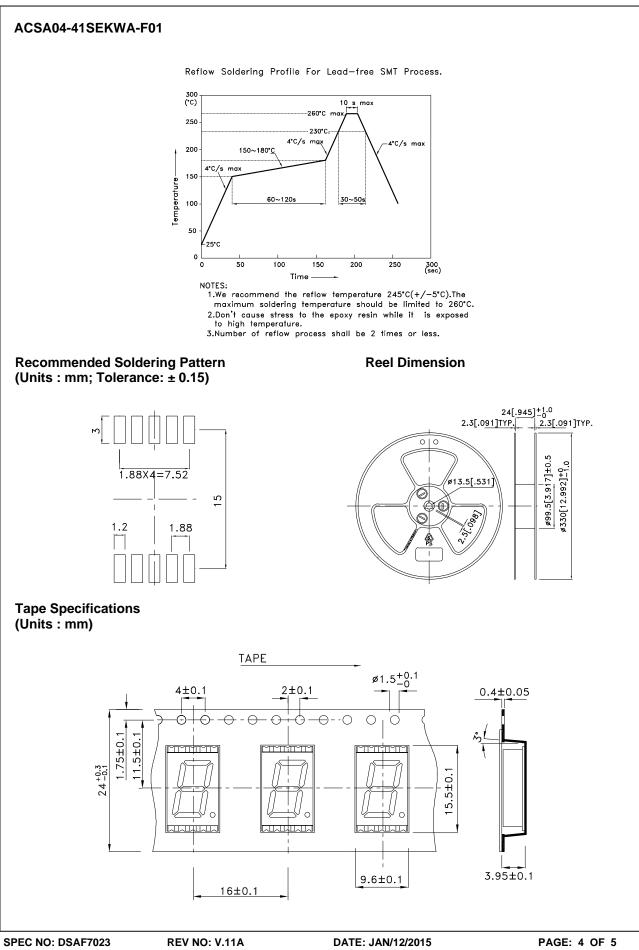

CHECKED: Joe Lee

DATE: JAN/12/2015 DRAWN: P.Cheng

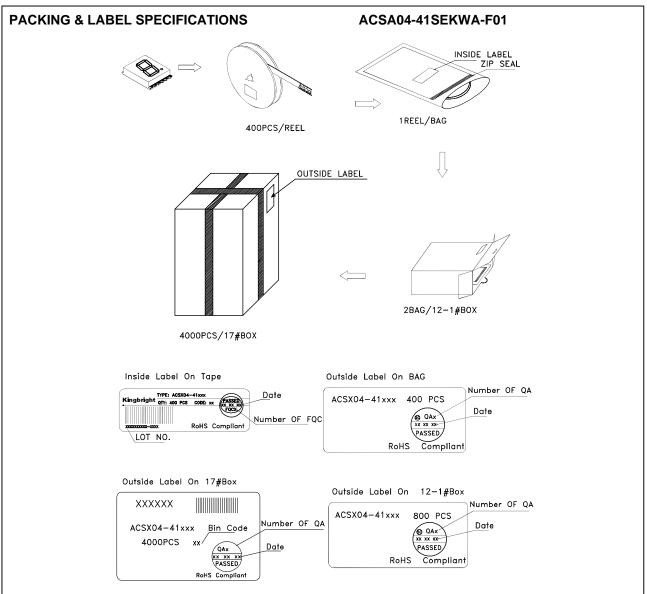

Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3.When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.

6.All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes