




# SK22BF THRU SK220BF

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts   Forward Current - 2.0 Ampere

### SMBF

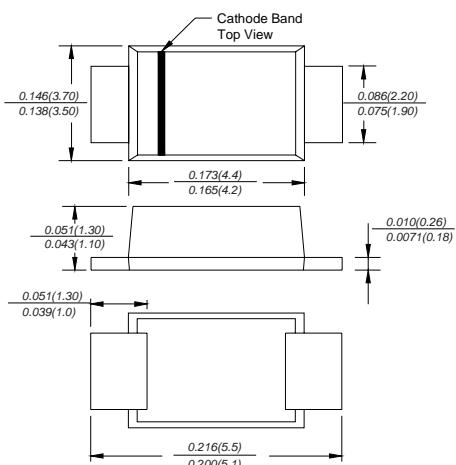

Dimensions in inches and (millimeters)

### FEATURES

- ♦ Metal silicon junction,majority carrier conduction
- ♦ For surface mounted applications
- ♦ Low power loss,high efficiency
- ♦ High forward surge current capability
- ♦ For use in low voltage,high frequency inverters, free-wheeling, and polarity protection applications

### MECHANICAL DATA

**Case:** JEDEC SMBF molded plastic body

**Terminals:** leads solderable per MIL-STD-750, Method 2026

**Mounting Position:** Any

**Weight:** 57mg/0.002oz

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.


MDD Catalog Number	SYMBOLS	SK22BF	SK24BF	SK26BF	SK28BF	SK210BF	SK215BF	SK220BF	UNITS
Marking code		K22B	K24B	K26B	K28B	K210B	K215B	K220B	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	40	60	80	100	150	200	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	V <sub>dc</sub>	20	40	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T <sub>L</sub> (see fig.1)	I <sub>(AV)</sub>	2.0						Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	55			45			Amps	
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	0.55	0.70	0.85	0.95				Volts
Maximum DC reverse current      TA=25°C at rated DC blocking voltage      TA=100°C	I <sub>R</sub>	0.5 5.0		0.3 3.0					mA
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	250		110					pF
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub>	65			°C/W				
Operating junction temperature range	T <sub>J</sub>	-50 to +125			°C				
Storage temperature range	T <sub>STG</sub>	-50 to +150			°C				

**Note:** 1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SK22BF THRU SK220BF


**Fig.1 Forward Current Derating Curve**

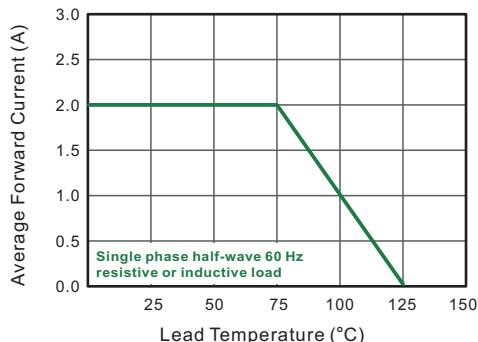


**Fig.2 Typical Reverse Characteristics**

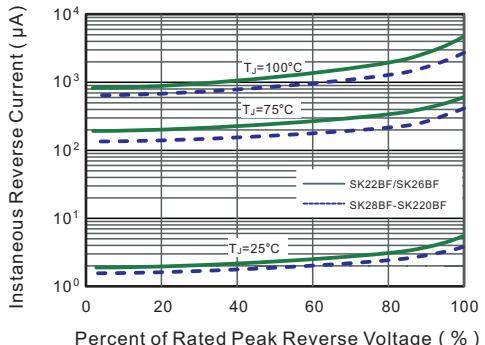


**Fig.3 Typical Forward Characteristic**

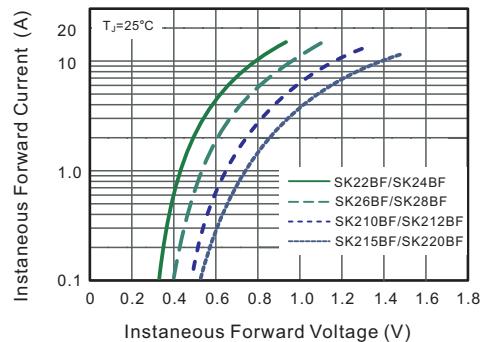


**Fig.4 Typical Junction Capacitance**

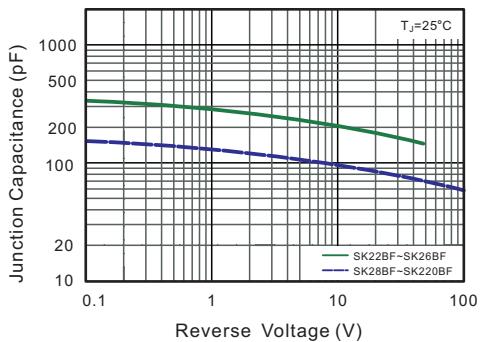

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

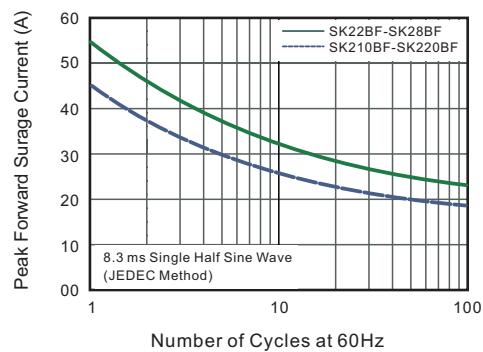

**Fig.6- Typical Transient Thermal Impedance**

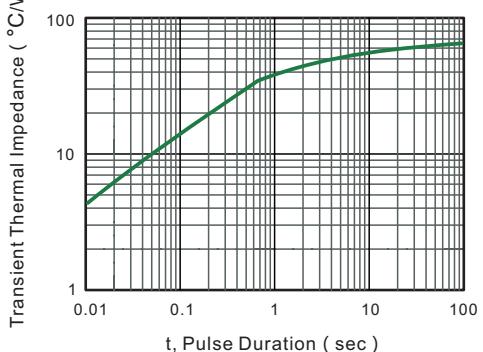

The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!