



Bestückungsplan - contact layout

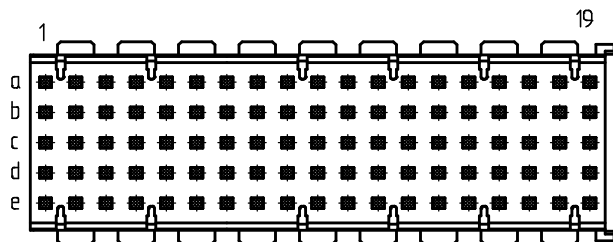

■ = bestückt - assemble

Lochbild für Leiterplatte (Bestückungsseite)

Board hole pattern (Component mounting side)

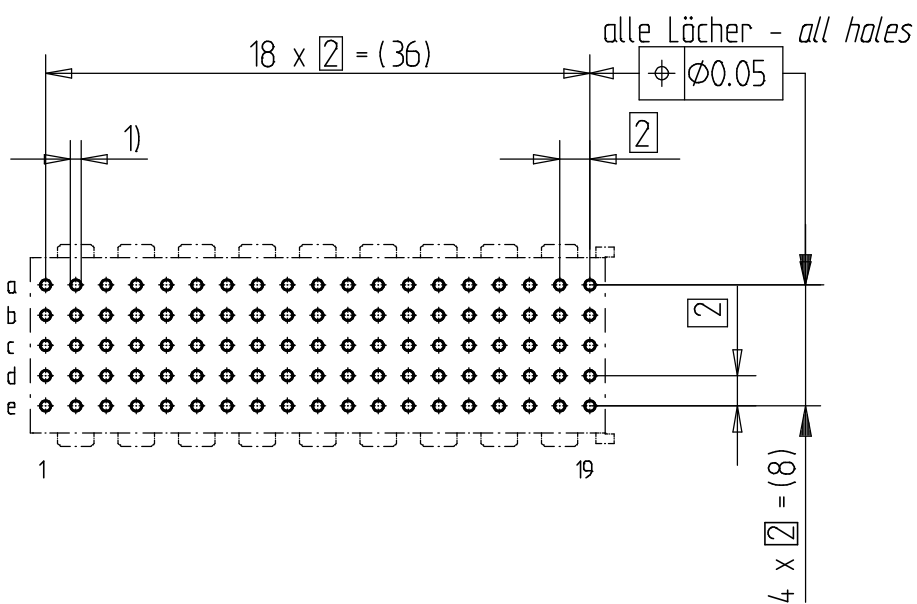

RoHS: 6/6

Plating:

Signal Contacts:

Termin. area: 2-3 μ m Ni, 0.5-2 μ m Sn

Mating area: 2-3 μ m Ni, 0.65 μ m Pd Ni with Au-Flash

1) $\phi 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\phi 0.6 \pm 0.05$ Diameter of finished plated-through hole

$\phi 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\phi 0.7 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
 siehe Zeichnung 114406

Metal plating of plated-through hole
 see drawing 114406

Fehlende Masse und Angaben nach IEC 61076-4-101

Missing information and dimensions per IEC 61076-4-101

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			
Consider protection memo from DIN 34 c Index	20.05.2011 Date	 www.ERNI.com	Designation ERmet-FS Federleiste B19 <i>ERmet-Female Straight Type B19</i>	
		V:00070816.SZA	100201890001	K
			ERMB19	