


MLJ1005WR15JT000









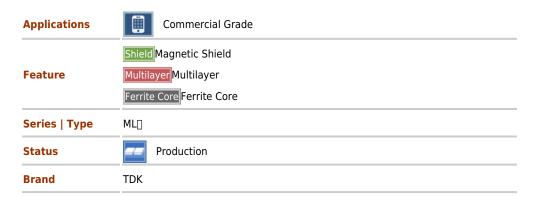



Size		
Length(L)	1.00mm ±0.05mm	
Width(W)	0.50mm ±0.05mm	
Thickness(T)	0.50mm ±0.05mm	
Recommended Land Pattern (A)	0.50mm Nom.	
Recommended Land Pattern (B)	0.40mm Nom.	
Recommended Land Pattern (C)	0.50mm Nom.	

Electrical Characteristics		
Inductance	150nH ±5% at 25MHz	
Rated Current (L Change) [Typ.]	450mA (10% Down)	
Rated Current (L Change) [Max.]	350mA (10% Down)	
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]	450mA (25°C Rise)	
DC Resistance [Typ.]	400mΩ	
DC Resistance [Max.]	450mΩ	
Self Resonant Frequency [Min.]	400MHz	
Self Resonant Frequency [Typ.]	600MHz	
Q [Min.]	15	
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	10000pcs	
Weight	0.0012g	

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.





MLJ1005WR15JT000









Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

MLJ1005WR15JT000










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.